

GASTRON

01 - Fixed type VOC Gas Detector

# Intelligent & Sampling Type VOC Gas Detector


## GTD-5000VOC

### Feature


- ▷ Fast response of VOC gas leakage with a high efficient pump inside
- ▷ Self diagnosis function with built-in Microprocessor
- ▷ Easy replacement with a cartridge type sensor
- ▷ Digital flow sensor to maintain regular flow rate
- ▷ Low concentration VOC gas detection by PID sensor
- ▷ Stable quality and proved detection principle for service life
- ▷ Fine LCD display for showing various information
- ▷ 4-digit digital gas concentration display
- ▷ 4-20mA DC output signal
- ▷ Easy configuration of monitoring by RS-485 Modbus isolated serial data communication or PoE(Optional)
- ▷ 2-stage alarm, 1-trouble display and relay contact output
- ▷ 3-wire connection for signal & power
- ▷ Calibration and maintenance by one-man



## General

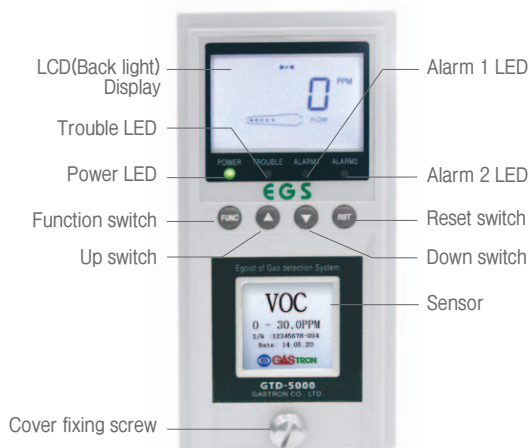

## Dimension (Unit:mm)

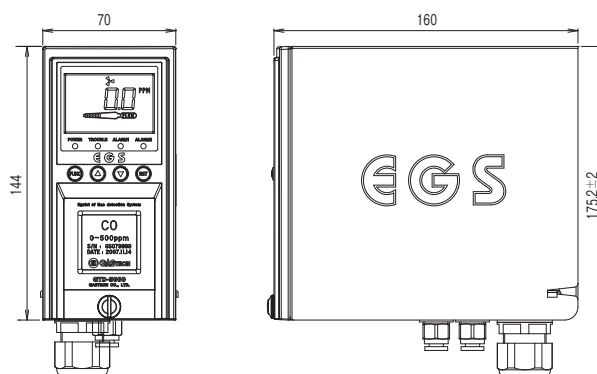

## Accessories



Micro Filter



Mounting Bracket

## Specification

※Specifications are subject to be changed without prior notice.

INTELLIGENT & SAMPLING TYPE VOC GAS DETECTOR	
Model	GTD-5000VOC
Measuring gas	VOC gas(Benzene, Toluene, Xylene & etc)
Measuring type	Auto Sampling type
Measuring method	Photo-Ionization Detector(PID)
Measuring range	5ppb ~ 300ppm
Response time	< 5sec / 90% scale
Accuracy	±3% / Full scale
Parameter control	Front switch (calibration, maintenance, alarm setting)
Operation mode display	4-LED (Power, 2-stage alarm, 1-trouble)
Measuring value display	LCD Display(4-Digit)
Alarm signal output	250V 1A / 3-SPST relay contact (2-stage alarm, 1-trouble)
Output signal	4-20mADC RS-485 Modbus(Optional) / PoE(Power over Ethernet)(Optional)
Sampling method	Diaphragm Pump
Sampling line	OD 1/4" (Standard)
Flow rate	0 ~ 1000 ml/min max
Cable/Distance	Power + Signal cable : 3-wire > 1.5sq(AWG16) / 2500m max RS-485 data communication cable : 1 pair(UL2919 RS-485) / 1000m max PoE(Power over Ethernet) : 100m max
Conduit connection	Cable gland(PG-16)
Mounting type	Wall mount
Operating temperature	-20℃ ~ +60℃
Operating humidity	5 to 99% RH (Non-condensing)
Operating power	Standard : 18 ~31V DC (24V DC normal) / 280mA max PoE(NOTE 1) : 48V DC ±10% / 200mA max
Material	Front(Poly carbonate), Sides(Steel)
Dimensions	Standard type : 70(W) × 144(H) × 160(D) mm
Weight	Standard type : 2.5kg
Approval	CE ( EN50270:1999 )
NOTE 1	DC 24V should be supplied if you want to use Pyrolyzer in case of using PoE power