



SENTRY SAF-T-VISE QUILLS

Chemical Injection & Sample Quills

CORROSION MONITORING

Sentry® Saf-T-Vise® quills offer ease of use and custom configuration for maximum versatility. The Saf-T-Vise patented locking collet is simple to use and enhances operator safety by safely securing the shaft within the process stream in both low and extremely high pressure conditions. The quills are versatile and can be configured either to inject chemicals into or take a sample from within a pressurized process such as a pipeline.

MODELS

STV-LP1-Q | STV-LP2-Q | STV-HP1-Q | STV-HP2-Q

BENEFITS

Saf-T-Vise quills are hand insertable (low pressure) or mechanically insertable (high pressure) into your pressurized system. With a wide range of pressure ratings available, Saf-T-Vise quills are the optimal choice for monitoring and protecting most pressurized applications. They can be mounted in any orientation with extended insertion lengths of up to 20 feet for hard-to-access application situations. Saf-T-Vise STV-T Series insertion tools are used for mechanically inserting the quill shafts.


FEATURES

- Process pressure bleeder valve
- Patented locking collet safely secures the shaft within the process stream until released by the operator
- Integrated safety cap or chain, depending on model
- 45-degree bevel with crosscut face
- Designed and manufactured in accordance with ASME B31.3
- Canadian Registration Number available for most models
- Process wetted components comply with NACE MR0175/2009 and are suitable for service in hydrogen sulfide (H₂S) environments

STANDARD AVAILABLE TIP




Quill with
45 Degree
Cross Cut

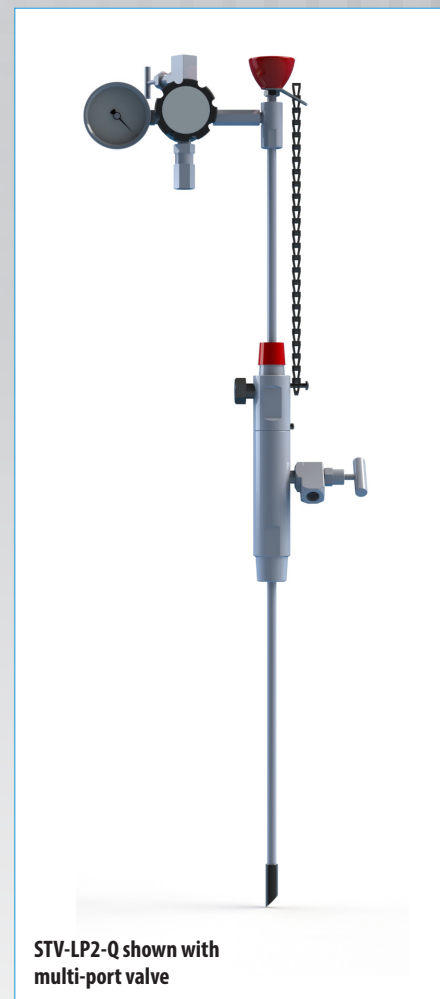

STV-LP2-Q shown with
multi-port valve



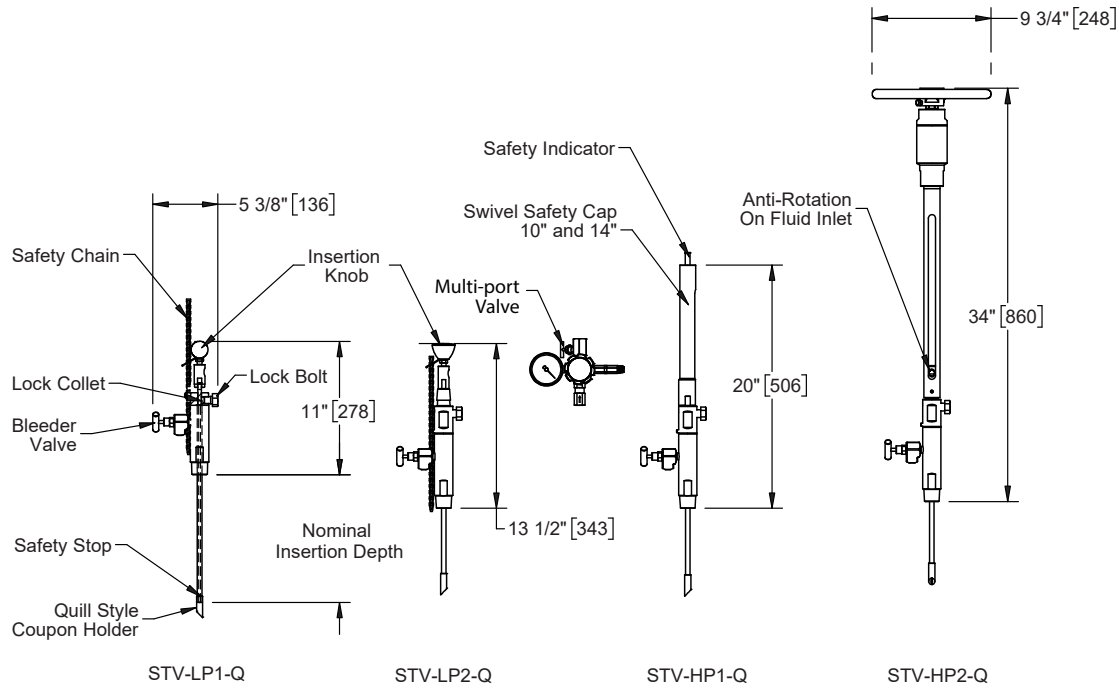

SPECIFICATIONS

model	weight	materials	insertion pressure (MOP)	pressure rating (MAP)	temperature rating (seals)	process connection	insertion depth	shaft OD
STV-LP1-Q	4 to 7 lb 1.8 to 3.2 kg	316/316L SS [†]	750 psi at 100°F 52 bar at 38°C	2000 psi at 100°F 138 bar at 38°C	PTFE: 450°F 232°C	1 in NPT	11, 17, 23, or 29 in 28, 43, 58, or 74 cm	3/8 in
STV-LP2-Q	10 to 35 lb 4.5 to 16 kg	316/316L SS; other alloys available	3/8 in: 750 psi at 100°F 52 bar at 38°C 1/2 in: 420 psi at 100°F 29 bar at 38°C	4000 psi at 100°F 275 bar at 38°C	PTFE: 450°F 232°C graphoil: *	1/2, 3/4, 1, 1 1/2 or 2 in NPT or flange	up to 6 ft up to 1.8 m	3/8 or 1/2 in
STV-HP1-Q	10 to 45 lb 4.5 to 20 kg	316/316L SS; other alloys available	5000 psi at 100°F 344 bar at 38°C	5000 psi at 100°F 344 bar at 38°C	PTFE: 450°F 232°C graphoil: *	1/2, 3/4, 1, 1 1/2 or 2 in NPT or flange	up to 20 ft up to 6.1 m	3/8 or 1/2 in
STV-HP2-Q	15 to 45 lb 7 to 20 kg	316/316L SS	5000 psi at 100°F 344 bar at 38°C	5000 psi at 100°F 344 bar at 38°C	PTFE: 450°F 232°C graphoil: *	3/4 or 1 in NPT or flange	4, 8, 14 or 20 in 10, 20, 36 or 51 cm	3/8 in

*Graphoil seals are available for higher temperature applications; contact factory for details.

[†]316/316L (dual grade) stainless steel is dual certified to meet the mechanical properties of A479-316 at the low carbon content level of A479-316L

MAP: Maximum Allowable Pressure

MOP: Maximum Operating Pressure

sentry-equip.com

966 Blue Ribbon Circle North, Oconomowoc, WI 53066 U.S.A. | +1-262-567-7256 | sales@sentry-equip.com



© 2020 Sentry Equipment Corp. All rights reserved. All product and company names are property of their respective owners. It is solely the responsibility of end users, through their own testing and analysis, to select products and materials suitable for their specific application requirements, ensure they are properly installed, safely applied and properly maintained, and to limit their use to their intended purpose. Improper selection, installation or use may result in personal injury or property damage.

S-CM-SPS-00493-5 01-20

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =