

# IEPE Accelerometer Series

## Datasheet

Bently Nevada Machinery Condition Monitoring

124M2609 Rev. D

## Description

This series of Integrated Electronics Piezo-Electric (IEPE) accelerometers are optimized for obtaining high quality vibration signals in harsh industrial environments. Their piezo sensing elements provide exceptional dynamic range, frequency range and linearity, while their integrated amplifiers boost the signal, making them relatively immune to electrical noise.

They require an industry standard constant-current power supply, and provide an output voltage proportional to the acceleration signal. So they can interface to a wide variety of condition monitoring systems.

Within the series are options for 100 or 500 mV/g sensitivity, top-exit or side-exit connector, and several hazardous-area certification levels.

## Features

- Rugged stainless design, corrosion resistant
- Hermetic seal, case isolated
- ESD protection
- Reverse wiring protection
- EMI / RFI shielded
- Hazardous area certifications

## Benefits

- Able to fit in small spaces
- Light weight for walk around programs
- Cross wiring does not harm sensor
- Prevents ground loops in permanent mount applications
- Can be hosed down or submersed with proper connector
- Can be used in applicable certified hazardous areas



---

## Compliance

- See individual accelerometers for compliance.

## Accelerometers in the Series

Part Number	Cable exit	Sensitivity	Accel range	Frequency Range (3dB)	Haz-area rating
AM3100T2-Z2	Top exit sensor	100 mV/g	± 80 g	0.4 - 14,000 Hz	Zone 2 rated
AS3100S2-Z2	Side exit sensor	100 mV/g	± 80 g	0.5 - 10,000 Hz	Zone 2 rated
AP3500T2-Z1	Top exit sensor	500 mV/g	± 10 g	0.2 - 2,300 Hz	Zone 1 rated
AP3500S2-Z1	Side exit sensor	500 mV/g	± 10 g	0.2 - 3,700 Hz	Zone 1 rated
AM3100T2-Z0	Top exit sensor	100 mV/g	± 80 g	0.4 - 14,000 Hz	Zone 0 rated
AS3100S2-Z0	Side exit sensor	100 mV/g	± 80 g	0.7 - 10,000 Hz	Zone 0 rated

# AM3100T2-Z2

## Specifications

### Dynamic

Sensitivity, $\pm 5\%$ @25°C	100 mV/g
Acceleration range	80 g peak
Amplitude nonlinearity	1%
Frequency response	$\pm 10\%$ : 0.7-9,000 Hz $\pm 3$ dB: 0.4-14,000 Hz
Resonant frequency	30 kHz
Transverse sensitivity, max	$\pm 5\%$ of axial
Temperature response	-55°C : -20% +120°C : +10%

### Electrical

Voltage source	18-30 Vdc
Current regulating diode	2-10 mA
Broadband electrical noise @ 2.5 Hz to 25 kHz	500 $\mu$ g
Spectral electrical noise @ 10 Hz	7 $\mu$ g/ $\sqrt{\text{Hz}}$
Spectral electrical noise @ 100 Hz	4 $\mu$ g/ $\sqrt{\text{Hz}}$
Spectral electrical noise @ 1000 Hz	2 $\mu$ g/ $\sqrt{\text{Hz}}$
Output Impedance, max	100 $\Omega$
Bias output voltage	12 Vdc
Grounding	case isolated, internally shielded

### Environmental

Temperature range	-55°C to 120°C
Vibration limit	500 g peak
Shock limit	5,000 g peak
Electromagnetic sensitivity, equiv g, max	70 $\mu$ g/gauss
Sealing	Hermetic
Base strain sensitivity, max	0.0002 g/ $\mu$ strain

### Physical

Sensing element design	PZT ceramic / shear
Weight	62 grams
Case material	316L Stainless Steel
Mounting	¼-28 UNF tapped hole
Connector	Top exit, 2-pin, MIL-C-5015 style
Recommended cabling	Shielded, twisted pair, no longer than 100 feet

### Connections

Connector Pin	Function
Shell	ground
A	power/signal
B	common



Frequency response and spectral noise values are typical.

## Compliance and Certifications

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

## European Community Directives

ATEX Directive 2014/34/EU  
EMC Directive 2014/30/EU  
LV Directive 2014/35/EU  
Reach Directive 1907/2006/EC  
ROHS Directive 2011/65/EU

## Standards

EN 61326-1  
EN 60079-0  
EN 60079-15  
EN 60079-11

## Hazardous Area Approvals



## CSA/NRTL/C

Class I, Div 2, Groups A, B, C, D  
Class I, Zone 2, AEx/Ex nA II T4  
Install per drawing 117M2767

# AS3100S2-Z2 Specifications

## Dynamic

Sensitivity, ± 5% @25°C	100 mV/g
Acceleration range	80 g peak
Amplitude nonlinearity	1%
Frequency response	±10%: 1.0-5,000 Hz ± 3 dB: 0.5-10,000 Hz
Resonant frequency	22 kHz
Transverse sensitivity, max	±5% of axial
Temperature response	-55°C: -20% +120°C: +10%

## Electrical

Voltage source	18-30 Vdc
Current regulating diode	2-10 mA
Broadband electrical noise @ 2.5 Hz to 25 kHz	700 µg
Spectral electrical noise @ 10 Hz	10 µg/√Hz
Spectral electrical noise @ 100 Hz	5 µg/√Hz
Spectral electrical noise @ 1000 Hz	5 µg/√Hz
Output Impedance, max	100 Ω
Bias output voltage	12 Vdc
Grounding	case isolated, internally shielded

## Environmental

Temperature range	-55°C to 120°C
Vibration limit	500 g peak
Shock limit	5,000 g peak
Electromagnetic sensitivity, equiv g, max	70 µg/gauss
Sealing	Hermetic
Base strain sensitivity, max	0.002 g/µstrain

## Physical

Sensing element design	PZT ceramic / shear
Weight	145 grams
Case material	316L Stainless Steel
Mounting	1/4-28 UNF tapped hole
Connector	Side exit, 2-pin, MIL-C-5015 style
Recommended cabling	Shielded, twisted pair, no longer than 100 feet

## Connections

Connector Pin	Function
Shell	ground
A	power/signal
B	common



Frequency response and spectral noise values are typical.

## Compliance and Certifications

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.



## European Community Directives

ATEX Directive 2014/34/EU  
EMC Directive 2014/30/EU  
LV Directive 2014/35/EU  
Reach Directive 1907/2006/EC  
ROHS Directive 2011/65/EU

## Standards

EN 61326-1  
EN 60079-0  
EN 60079-15  
EN 60079-11:2011

## Hazardous Area Approvals

### CSA/NRTL/C

Class I, Div 2, Groups A, B, C, D  
Class I, Zone 2: AEx/Ex nA II T4  
Install per drawing 117M2767

# AP3500T2-Z1 Specifications

## Dynamic

Sensitivity, $\pm 5\%$ @25°C	500 mV/g
Acceleration range	10 g peak
Amplitude nonlinearity	1%
Frequency response	$\pm 10\%$ : 0.4-1,000 Hz $\pm 3$ dB : 0.2-2,300 Hz
Resonant frequency	15 kHz
Transverse sensitivity, max	$\pm 5\%$ of axial
Temperature response	-50°C: -10% +120°C: +10%

## Electrical

Voltage source	18-30 Vdc
Current regulating diode	2-10 mA
Broadband electrical noise @ 2.5 Hz to 25 kHz	8 $\mu$ g
Spectral electrical noise @ 10 Hz	2 $\mu$ g/ $\sqrt{\text{Hz}}$
Spectral electrical noise @ 100 Hz	0.4 $\mu$ g/ $\sqrt{\text{Hz}}$
Spectral electrical noise @ 1000 Hz	0.2 $\mu$ g/ $\sqrt{\text{Hz}}$
Output Impedance, max	100 $\Omega$
Bias output voltage	10 Vdc
Grounding	case isolated, internally shielded

## Environmental

Temperature range	-50°C to 120°C
Vibration limit	250 g peak
Shock limit	5,000 g peak
Electromagnetic sensitivity, equiv g, max	20 $\mu$ g/gauss
Sealing	Hermetic
Base strain sensitivity, max	0.0001 g/ $\mu$ strain

## Physical

Sensing element design	PZT ceramic / shear
Weight	142 grams
Case material	316L Stainless Steel
Mounting	1/4-28 UNF tapped hole
Connector	Top exit, 2-pin, MIL-C-5015 style
Recommended cabling	shielded, twisted pair, no longer than 100 feet

## Connections

Connector Pin	Function
Shell	ground
A	power/signal
B	common



Frequency response and spectral noise values are typical.



## Compliance and Certifications

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.



## European Community Directives

ATEX Directive 2014/34/EU  
EMC Directive 2014/30/EU  
LV Directive 2014/35/EU  
Reach Directive 1907/2006/EC  
ROHS Directive 2011/65/EU

## Standards

EN 61326-1  
EN 60079-0  
EN 60079-15  
EN 60079-11

## Hazardous Area Approvals

### CSA/NRTL/C

Class I, Div 1, Groups A, B, C, D  
Class I, Zone 1, Ex ia IIC T4  
Install per drawing 117M4393

# AP3500S2-Z1 Specifications

## Dynamic

Sensitivity, $\pm 5\%$ @25°C	500 mV/g
Acceleration range	10 g peak
Amplitude nonlinearity	1%
Frequency response	$\pm 10\%$ : 0.4-1,500 Hz $\pm 3$ dB : 0.2-3,700 Hz
Resonant frequency	18 kHz
Transverse sensitivity, max	$\pm 7\%$ of axial
Temperature response	-50°C: -8% +120°C: +5%

## Electrical

Voltage source	18-30 Vdc
Current regulating diode	2-10 mA
Broadband electrical noise @ 2.5 Hz to 25 kHz	12 $\mu$ g
Spectral electrical noise @ 10 Hz	2 $\mu$ g/ $\sqrt{\text{Hz}}$
Spectral electrical noise @ 100 Hz	0.6 $\mu$ g/ $\sqrt{\text{Hz}}$
Spectral electrical noise @ 1000 Hz	0.2 $\mu$ g/ $\sqrt{\text{Hz}}$
Output Impedance, max	100 $\Omega$
Bias output voltage	10 Vdc
Grounding	case isolated, internally shielded

## Environmental

Temperature range	-50°C to 120°C
Vibration limit	250 g peak
Shock limit	2,500 g peak
Electromagnetic sensitivity, equiv g, max	5 $\mu$ g/gauss
Sealing	Hermetic
Base strain sensitivity, max	0.001 g/ $\mu$ strain

## Physical

Sensing element design	PZT ceramic / shear
Weight	148 grams
Case material	316L Stainless Steel
Mounting	1/4-28 captive hex head screw
Connector	Side exit, 2-pin, MIL-C-5015 style
Recommended cabling	shielded, twisted pair, no longer than 100 feet

## Connections

Connector Pin	Function
Shell	ground
A	power/signal
B	common



Frequency response and spectral noise values are typical.

## Compliance and Certifications

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.



## European Community Directives

ATEX Directive 2014/34/EU  
EMC Directive 2014/30/EU  
LV Directive 2014/35/EU  
Reach Directive 1907/2006/EC  
ROHS Directive 2011/65/EU

## Standards

EN 61326-1  
EN 60079-0  
EN 60079-15  
EN 60079-11

## Hazardous Area Approvals

### CSA/NRTL/C

Class I, Div 1, Groups A, B, C, D  
Class I, Zone 1: Ex ia IIC T4  
Install per drawing 117M4393

# AM3100T2-Z0 Specifications

## Dynamic

Sensitivity, $\pm 5\%$ @25°C	100 mV/g
Acceleration range	80 g peak
Amplitude nonlinearity	1%
Frequency response	$\pm 10\%$ : 0.7–9,000 Hz $\pm 3$ dB : 0.4–14,000 Hz
Resonant frequency	30 kHz
Transverse sensitivity, max	$\pm 5\%$ of axial
Temperature response	-55°C: -20% +120°C: +10%

## Electrical

Voltage source	18–30 Vdc
Current regulating diode	2–10 mA
Broadband electrical noise @ 2.5 Hz to 25 kHz	500 $\mu$ g
Spectral electrical noise @ 10 Hz	7 $\mu$ g/ $\sqrt{\text{Hz}}$
Spectral electrical noise @ 100 Hz	4 $\mu$ g/ $\sqrt{\text{Hz}}$
Spectral electrical noise @ 1000 Hz	2 $\mu$ g/ $\sqrt{\text{Hz}}$
Output Impedance, max	100 $\Omega$
Bias output voltage	12 Vdc
Grounding	Case isolated, internally shielded

## Environmental

Temperature range	-50°C to 120°C
Vibration limit	500 g peak
Shock limit	5,000 g peak
Electromagnetic sensitivity, equiv g, max	70 $\mu$ g/gauss
Sealing	Hermetic
Base strain sensitivity, max	0.0002 g/ $\mu$ strain

## Physical

Sensing element design	PZT ceramic / shear
Weight	62 grams
Case material	316L Stainless Steel
Mounting	1/4–28 UNF tapped hole
Connector	Top exit, 2-pin, MIL-C-5015 style
Recommended cabling	Shielded, twisted pair, no longer than 100 feet

## Connections

Connector Pin	Function
Shell	ground
A	power/signal
B	common



Frequency response and spectral noise values are typical.

## Compliance and Certifications

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.



## European Community Directives

ATEX Directive 2014/34/EU  
EMC Directive 2014/30/EU  
LV Directive 2014/35/EU  
Reach Directive 1907/2006/EC  
ROHS Directive 2011/65/EU

## Standards

EN 61326-1  
EN 60079-0  
EN 60079-15  
EN 60079-11

## Hazardous Area Approvals

### CSA/NRTL/C

Class I, Div 1, Groups A, B, C, D  
Class II, Div 1, Groups E, F, G  
Class III, Div 1  
Class I, Zone 0, Ex ia IIC T4  
Class I, Zone 0, AEx ia IIC T4

### ATEX

Ga Ex ia IIC T4  
Install per drawing 117M4394

# AS3100S2-Z0

## Specifications

### Dynamic

Sensitivity, $\pm 5\%$ @25°C	100 mV/g
Acceleration range	80 g peak
Amplitude nonlinearity	1%
Frequency response	$\pm 10\%$ : 1.0–5,000 Hz $\pm 3$ dB : 0.7–10,000 Hz
Resonant frequency	22 kHz
Transverse sensitivity, max	$\pm 5\%$ of axial
Temperature response	-55°C: -8% +120°C: +10%

### Electrical

Voltage source	18–30 Vdc
Current regulating diode	2–10 mA
Broadband electrical noise @ 2.5 Hz to 25 kHz	700 $\mu$ g
Spectral electrical noise @ 10 Hz	10 $\mu$ g/ $\sqrt{\text{Hz}}$
Spectral electrical noise @ 100 Hz	5 $\mu$ g/ $\sqrt{\text{Hz}}$
Spectral electrical noise @ 1000 Hz	5 $\mu$ g/ $\sqrt{\text{Hz}}$
Output Impedance, max	100 $\Omega$
Bias output voltage	12 Vdc
Grounding	Case isolated, internally shielded

### Environmental

Temperature range	-50°C to 120°C
Vibration limit	500 g peak
Shock limit	5,000 g peak
Electromagnetic sensitivity, equiv g, max	70 $\mu$ g/gauss
Sealing	Hermetic
Base strain sensitivity, max	0.002 g/ $\mu$ strain

### Physical

Sensing element design	PZT ceramic / shear
Weight	145 grams
Case material	316L Stainless Steel
Mounting	1/4-28 captive hex head ascrew
Connector	Side exit, 2-pin, MIL-C-5015 style
Recommended cabling	Shielded, twisted pair, no longer than 100 feet

### Connections

Connector Pin	Function
Shell	ground
A	power/signal
B	common




Frequency response and spectral noise values are typical.

Ga Ex ia IIC T4  
Install per drawing I17M4394

## Compliance and Certifications

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

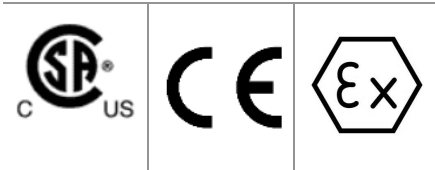

## European Community Directives

ATEX Directive 2014/34/EU  
EMC Directive 2014/30/EU  
LV Directive 2014/35/EU  
Reach Directive 1907/2006/EC  
ROHS Directive 2011/65/EU

## Standards

EN 61326-1  
EN 60079-0  
EN 60079-15  
EN 60079-11

## Hazardous Area Approvals

### CSA/NRTL/C

Class I, Div 1, Groups A, B, C, D  
Class II, Div 1, Groups E, F, G  
Class III, Div 1  
Class I, Zone 0, Ex ia IIC T4  
Class I, Zone 0, AEx ia IIC T4

## ATEX

# Ordering Information


Part Number	Cable exit	Sensitivity	Accel range	Frequency Range (3dB)	Haz-area rating
AM3100T2-Z2	Top exit sensor	100 mV/g	± 80 g	0.4 - 14,000 Hz	Zone 2 rated
AS3100S2-Z2	Side exit sensor	100 mV/g	± 80 g	0.5 - 10,000 Hz	Zone 2 rated
AP3500T2-Z1	Top exit sensor	500 mV/g	± 10 g	0.2 - 2,300 Hz	Zone 1 rated
AP3500S2-Z1	Side exit sensor	500 mV/g	± 10 g	0.2 - 3,700 Hz	Zone 1 rated
AM3100T2-Z0	Top exit sensor	100 mV/g	± 80 g	0.4 - 14,000 Hz	Zone 0 rated
AS3100S2-Z0	Side exit sensor	100 mV/g	± 80 g	0.7 - 10,000 Hz	Zone 0 rated

## Accessories supplied:


- 1/4-28 to 1/4-28 mounting stud
- calibration data




# Graphs and Figures

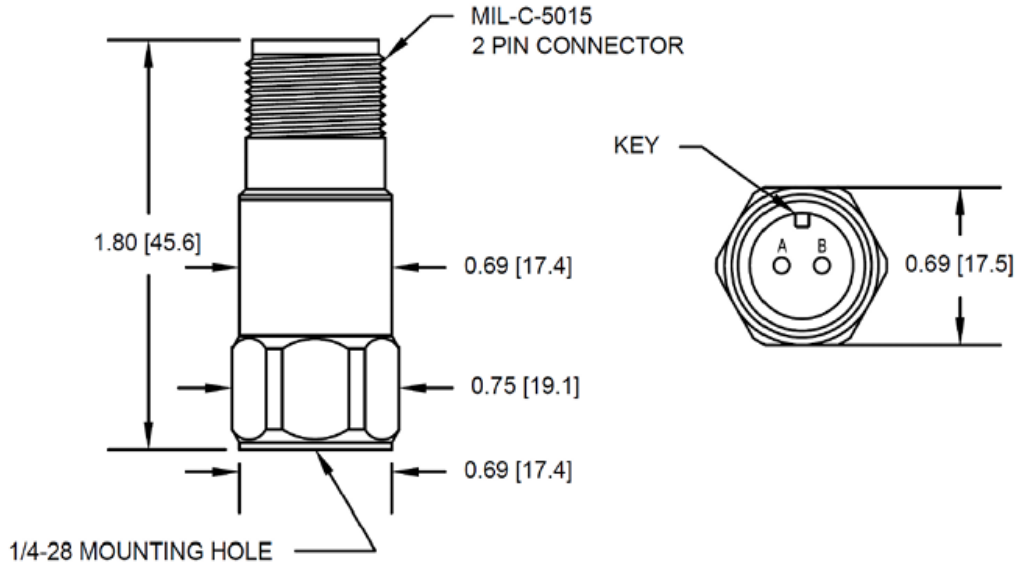


**Figure 1: AM3100T2-Z2 & AM3100T2-Z0 dimensions**

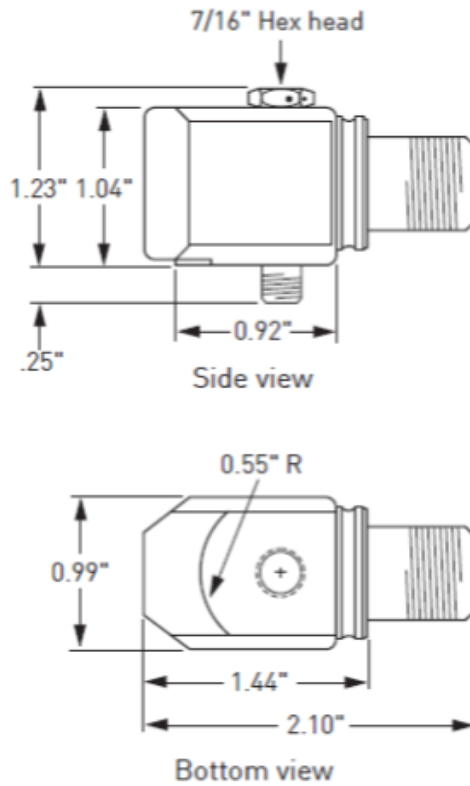

**Figure 2: AS3100S2-Z2 & AS3100S2-Z0 Dimensions**

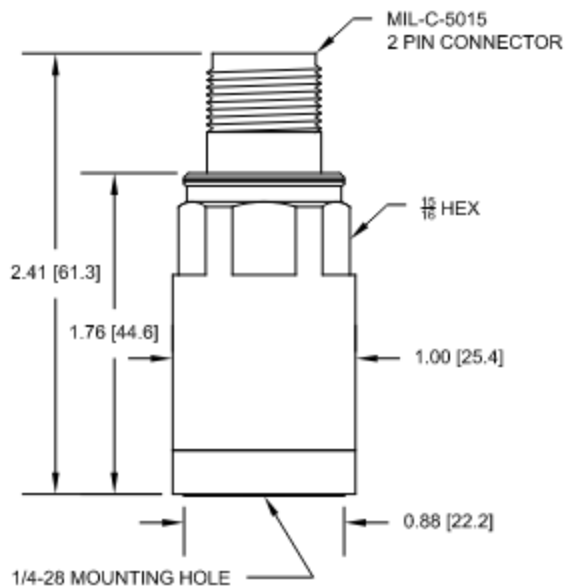

**Figure 3: AP3500T2-Z1 dimensions**

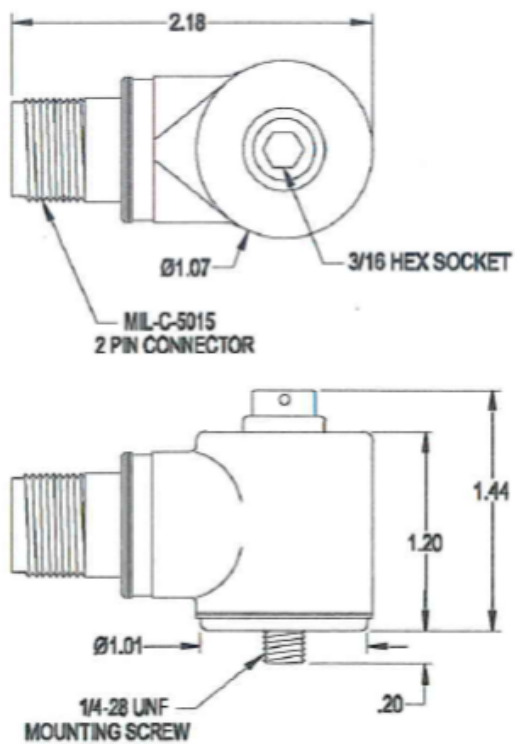

**Figure 4: AP3500S2-Z1 dimensions**

Copyright 2022 Baker Hughes Company. All rights reserved.



Bently Nevada, M2 and Orbit Logo are registered trademarks of Bently Nevada, a Baker Hughes business, in the United States and other countries. The Baker Hughes logo is a trademark of Baker Hughes Company. All other product and company names are trademarks of their respective holders. Use of the trademarks does not imply any affiliation with or endorsement by the respective holders.

Baker Hughes provides this information on an "as is" basis for general information purposes. Baker Hughes does not make any representation as to the accuracy or completeness of the information and makes no warranties of any kind, specific, implied or oral, to the fullest extent permissible by law, including those of merchantability and fitness for a particular purpose or use. Baker Hughes hereby disclaims any and all liability for any direct, indirect, consequential or special damages, claims for lost profits, or third party claims arising from the use of the information, whether a claim is asserted in contract, tort, or otherwise. Baker Hughes reserves the right to make changes in specifications and features shown herein, or discontinue the product described at any time without notice or obligation. Contact your Baker Hughes representative for the most current information.

The information contained in this document is the property of Baker Hughes and its affiliates; and is subject to change without prior notice. It is being supplied as a service to our customers and may not be altered or its content repackaged without the express written consent of Baker Hughes. This product or associated products may be covered by one or more patents. See [Bentley.com/legal](https://www.bentley.com/legal).

1631 Bently Parkway South, Minden, Nevada USA 89423  
Phone: 1.775.782.3611 (US) or [Bentley.com/support](https://www.bentley.com/support)  
[Bentley.com](https://www.bentley.com)