

# Small Instrumentation Modules

SIM928 — Rechargeable isolated voltage source

- $\pm 20$  V isolated voltage source
- Ultra-low noise output
- Two switchable, recharging batteries for continuous operation
- Battery lifetime: 1000 charge cycles
- Output floats to  $\pm 40$  V
- Short-circuit protected

• SIM928 ... \$1395 (U.S. list)



## SIM928 Isolated Voltage Source

The SIM928 Isolated Voltage Source is ideal for applications where ultra-clean DC voltage is required. Voltage can be set between  $\pm 20$  VDC with millivolt resolution, and the source can drive up to  $\pm 10$  mA. The output circuit is optically isolated from all earth-referenced charging circuitry, providing maximum flexibility and noise immunity. The system can float to  $\pm 40$  V, and the output is short-circuit protected.

At the heart of the SIM928 are two independent nickel-metal-hydride rechargeable batteries, each providing up to 12 hours of operation under full-load conditions. When a battery is nearly depleted, the SIM928 automatically switches in a second battery. The switchover between batteries is virtually glitch-free, giving you uninterrupted power around the clock. The depleted battery is automatically charged to capacity in about 5 hours. The batteries are guaranteed for 1000 charging cycles, and SRS offers replacement battery sets.

In applications that occur over long time intervals, starting with a fully charged battery may be desirable. A battery charge override feature allows you to manually switch in the fully charged battery (assuming it is in "ready" state) at any time.

Banana binding posts are provided for the + terminal, - terminal and chassis ground.

**Output**

Output range	$\pm 20$ V, 1 mV resolution
Max. output current	$\pm 10$ mA
Floating output	$\pm 40$ V (common mode to ground)
Noise	$10 \mu\text{V}_{\text{rms}}$ (1 kHz bandwidth)
Current limit	15 mA
Short-circuit duration	indefinite

**Batteries**

Number of batteries	2 (1 operating, 1 charging/standby)
Type	Nickel metal hydride
Charge time	5 hrs.
Discharge time	12 hrs. (10 mA load)
Lifetime	>1000 charge cycles, 2 yr. shelf life
Battery switching	Automatically switches batteries when active battery is fully discharged.



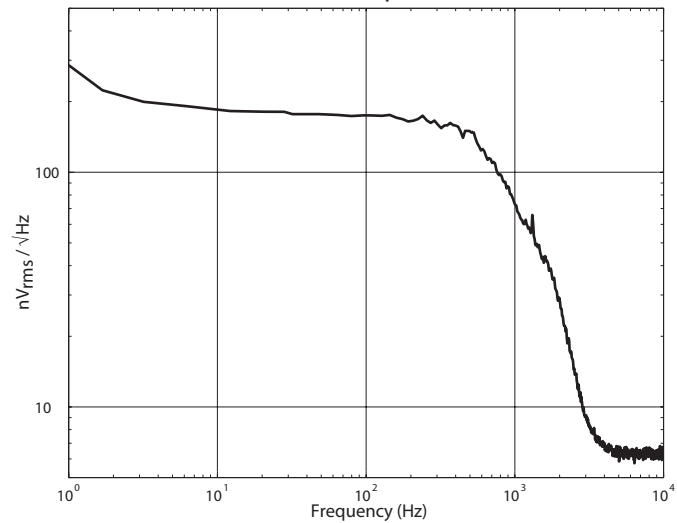
SIM928 rear panel

Switchover glitch	<1 mV for <1 ms
Battery charge override	Allows manual switching of batteries. Triggered when front-panel button is held for 5 seconds or more. Only armed when standby battery is in ready state.

**General**

Operating temperature	0°C to 40°C, non-condensing
Interface	Serial via SIM interface
Connectors	Banana binding posts (+ terminal, - terminal, and chassis ground) DB15 (male) SIM interface
Power	Powered by SIM900 Mainframe, or by user-provided DC power supply (+24 V, -15 V and +5 V)
Dimensions	1.5" $\times$ 3.6" $\times$ 7.0" (WHD)
Weight	3 lbs.
Warranty	One year parts and labor on defects in materials and workmanship

SIM928 Output Noise

**Ordering Information**

SIM928	Isolated voltage source	\$1395
O928RBA	Replacement battery assembly	\$400