



1U Switching Regulated

Rack Mounting & Benchtop

AC-DC single & wide adjust output with optional auxiliary output

- UL60950, UL508, CE Certified
- Five Year Warranty



Don't forget these facts about Acopian....

- Fast Shipping? Acopian invented it! For over half a century, Acopian has built and shipped millions of power supplies within 3-DAYS after receipt of order. And we still do today! View our 3-DAY Shipping Promise: www.acopian.com/3dayship.html
- You ALWAYS talk to a real person when you call Acopian.
- Acopian power supplies last a *very long time!*
- You can email 3day@acopian.com anytime for 24/7 product support.
- The *Online System Builder* (www.acopian.com/SystemBuilder) is a convenient way to get your own custom power supply or power system (and most ship within 9 Days).
- You can order Acopian power supplies factory direct.
- ALL Acopian products are made in the USA.



Easton, PA & Melbourne, FL
 1-800-523-9478 • www.acopian.com
 Order Factory Direct
 Made in USA



single output & wide adjust output
with optional auxiliary output (to 180 watts)

1U SWITCHING REGULATED (to 720 watts) (Power Factor Correction and Universal Input)

RACK MOUNTING & BENCHTOP
AC-DC

- UL60950, UL508, CE Certified
- Five Year Warranty



STANDARD FEATURES

- Universal input
- Power Factor Correction
- Constant voltage and constant current modes
- Short circuit and overload protection
- Thermal protection
- No minimum load required
- Adjustable down to 0 volts ('Wide Adjust' models)
- Internal EMI Filter and RFI Shielding
- Pluggable connectors for input and control wiring
- Remote Sensing
- 'Soft start' operation
- Output Programming ('Wide Adjust' models)
- Voltage and Current monitors
- Output Inhibit (or Enable)
- Vok ('Single Output' models)

SPECIFICATIONS

WARNING: HIGH LEAKAGE CURRENT. EARTH CONNECTION ESSENTIAL BEFORE CONNECTING SUPPLY.

Input Voltage: 95-265 VAC, 49-420 Hz, single phase.
AC Input, max.: 8A (450W), 12A (720W)

Note: All units are shipped with 125v IEC line cord (standard).

Inrush current: Cold start, (thermistor limiter) 33A peak @ 115 VAC (typical); 65A peak @ 230 VAC (typical). (Not recommended for use on ground fault protected circuits.)

Startup Time: 800 mS (typical).

Input Undervoltage: An input of less than 95 VAC will not damage power supply.

Power Factor: 0.99 typical at 115 VAC, 60Hz and full load. Complies with EN61000-3-2.

Regulation (in constant voltage mode):

Line Regulation: $\pm 0.05\%$ or 5 mV, whichever is greater.
Load Regulation: $\pm 0.05\%$ or 5 mV, whichever is greater.

Regulation, Ripple (in constant current mode):

Line Regulation: $\pm 0.2\%$ or 30 mA.
Load Regulation: $\pm 0.5\%$ or 100 mA.
Current Ripple: 0.5% rms.

Regulation, Ripple (in 'N+1' or 'P' mode):

Line Regulation: $\pm 0.1\%$ or 50 mV, whichever is greater.
Load Regulation: $\pm 0.1\%$ or 50 mV, whichever is greater.
Ripple: 2x rating in table.

Ambient Operating Temperature: 0 to +71°C.

Temperature Coefficient (after 30 minute warm-up):

Voltage mode; $\pm 0.02\%/^{\circ}\text{C}$ (typical).
Current mode; $\pm 0.1\%/^{\circ}\text{C}$ (typical).



Drift (voltage mode or current mode): $\pm 0.1\%$ (typical) over 8 hours, after 30 minute warmup.

Storage Temperature: -40 to +85°C.

Holdup Time: 20mS minimum with full load.

Transient Response: 300 μS to return to $\pm 1\%$ of output setting. Maximum of $\pm 3\%$ output excursion following a load step change from 50% to 100%.

Efficiency: See table. (Typical, at 115 VAC, with full load.)

Polarity: Output is floating and may be used in either polarity.

Remote Sensing: Compensates up to 0.5 Vdc drop per output line (or within the limits of the output voltage adjustment range). Present on both primary and auxiliary outputs. (Wide Adjust models compensate up to 0.5 Vdc drop per output line.)

Output Adjustment: Voltage and current adjustments are accessible through the rear panel. No current adjustment for auxiliary output.

Output Programming (Wide Adjust models): The output voltage and current may be programmed from 0 to full rating by means of control voltage inputs of 0 to +10Vdc (0 to +5Vdc for models with option "C5"). Voltage mode accuracy: 0.5%. Current mode accuracy: 3% for models with greater than 10 amps output current and 4% for models with less than 10 amps output current. Accuracy percentages do not apply below 5% of output rating. **NOTE: If "C1" and "DIO" options are both present, rear panel output programming is disabled.**

Voltage Monitor Terminal: Permits remote monitoring of output voltage, stepped down by a ratio of 10:1 (for 3.3v to 90v models) or 100:1 (for 100v to 135v models). Accuracy is 0.5% of maximum rated output voltage.

For models with 0-5v programming option "C5":

Permits remote monitoring of output voltage, stepped down by a ratio of 10:1 (for 3.3v to 45v models) or 100:1 (for 48v to 135v models). Accuracy is 0.5% of maximum rated output voltage.

1U SWITCHING REGULATED (to 720 watts)

SPECIFICATIONS (continued)

Current Monitor Terminal: For models with greater than 10 amps output current: permits remote monitoring of output current, stepped down by a ratio of 100 mV/Amp (accuracy is 3% of maximum rated output current). For models with less than 10 amps output current: permits remote monitoring of output current, stepped down by a ratio of 1000 mV/Amp (accuracy is 3% of maximum rated output current).

For models with 0-5v programming option "C5":

For models with greater than 45 amps output current: permits remote monitoring of output current, stepped down by a ratio of 10 mV/Amp (accuracy is 5% of maximum rated output current). For models with less than 45 amps output current: permits remote monitoring of output current, stepped down by a ratio 100 mV/Amp (accuracy is 3% of maximum rated output current).

Overload/Short Circuit Protection: A short or overload forces the power supply into constant current mode, with automatic recovery.

Overvoltage Protection: Latches power supply OFF, reset by momentarily removing AC input power. (Models with 'N' option reset automatically.)

Thermal Protection: Thermostat(s), self-resetting.

Internal Failure Protection: Provided by internal fuse.

Output Inhibit: Applying between +3 and +15 Vdc to the Inhibit terminal will disable the supply. 'Output Enable' is also available (see Options).

V ok (Single Output models): When the power supply's output voltage is between -14% and +15% of the nominal output voltage, 'V ok' will be between +3 and +5Vdc (high). When the output voltage is outside the -14%, +15% window, the 'V ok' voltage will go low (approx 0.5 Vdc). 'V ok' can source 1 mA or sink up to 5 mA.

Switching Frequency: 110 kHz (typical).

EMI: Designed to meet FCC Part 15, EN61326-1 and EN55022, Class A.

<u>Dielectric Withstand Voltage</u>	<u>Isolation</u>
Input to output: 4242 Vdc	300 Vdc
Input to case: 2121 Vdc	300 Vdc
Output to case: 750 Vdc	300 Vdc

Cooling: Forced-air cooled. Air enters front of power supply and exits from rear cover. Fan speed is controlled by thermostat. High Speed Fan noise rated at 48dB for 450w models and 54dB for 720w models.

Mounting: Rack Mounting models are designed expressly for mounting in standard 19" wide RETMA cabinet racks. Benchtop models rest on four rubber feet.

OPTIONS

Output Enable: To enable the DC output, the Inhibit terminal must be tied to the -DC output. An open collector or contact closure can be used. To order, add suffix "E" to the model number.

Handles: To order, add suffix "H" to the model number.

Digital Voltage and Current Meters: To order, add suffix "M3" to the model number.

Output Blocking Protection Diode: Used for battery charging applications. Derate output by 10%. To order, add suffix "E1" to the model number. (Not available with N or P options.)

Front Panel Adjust (Wide Adjust models): Voltage and current adjustment knobs available on front panel. To order, add suffix "C1" to the model number.

Output Indicator(s) (DC on) (Single Output models): Front panel mounted green LED(s). To order, add suffix "G3" to the model number.

N+1 Redundancy (Single Output models): Allows up to 4 like models to be wired in N+1 redundancy. An internal isolation OR-ing diode is included in each power supply. Current share accuracy is $\pm 5\%$ (typical). Power supply output current must be derated by 10%. This option incorporates the "P" (**Paralleable**) option and the "E1" (**Output Blocking Protection Diode**) option, so if you specify the "N" option do not also specify the "P" or "E1" options. To order, add suffix "N" to the model number.

Paralleable (Single Output models): Allows up to 4 like models to be directly wired in parallel for increased current capability. Current share accuracy is $\pm 5\%$ (typical). Power supply output current must be derated by 5%. This option is included in the "N" (**N+1 Redundancy**) option listed above, so if you specify the "N" option, do not also specify the "P" option. To order, add suffix "P" to the model number.

0-5v Programming (Wide Adjust Models - instead of the standard 0-10v Programming): Output voltage and current of standard models may be programmed from 0 to full rating by means of control voltage inputs of 0 to +10Vdc. For programming with 0 to +5Vdc control voltages, add suffix "C5" to the model number. Voltage mode accuracy: 1%. Current mode accuracy: 5%. Accuracy percentages do not apply below 5% of output rating.

Alarm with Relay Contacts (Single Output models): Choose one: G1 or G7

G1: Form C alarm contacts that change state when output voltage deviates $\pm 2\text{Vdc}$ (5v to 47v models) or $\pm 3\text{Vdc}$ (48v to 135v models) from nominal. To order, add suffix "G1" to model number. (Not available with Auxiliary Output or DIO options.)

G7: Form C alarm contacts (contacts rated at 175v, .5A) that change state when output reaches 10% below or 15% above nominal voltage. To order, add suffix "G7" to the model number. ('V ok' signal is disabled with this option.)

Chassis Slides (Rack Mounting models): For racks having rear mounting rails spaced 18" to 24" behind the front panel. To order, add suffix "S" to the model number.

Auxiliary Output: Choose desired voltage from the 'Optional Auxiliary Output' table on page C19. To order, use the 'Model' column to determine suffix. (Not available with C1 or G1 options.)


Digital Interface: Can be used to monitor and/or control output voltage and current. Includes isolated Ethernet (10/100Mbps), RS232, and USB interfaces (plus RS485 with option "DIO2"), utilizing 16 bit DAC and ADC. This option incorporates the "E" (**Enable**) option, so if you specify this option do not also specify the "E" option. To order, add either suffix "DIO1" or suffix "DIO2" to model number. (Not available with G1 or Auxiliary Output options.)

Bus Bar Cover: Protects exposed output terminals from contact. To order, add suffix "M" to model number.


Moisture/Fungus Proofing: Power supplies can be furnished with a moisture and fungus resistant varnish. To order, add suffix "F" to the model number.

1U SWITCHING REGULATED (to 720 watts)


SWITCHING REGULATED AC-DC

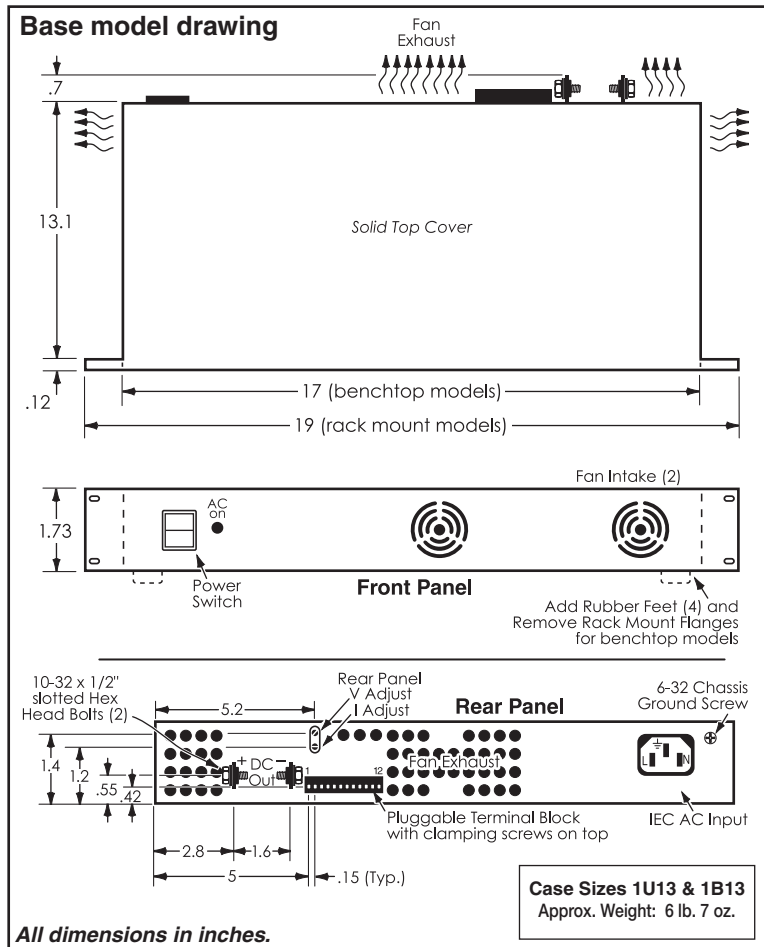

Available options drawing

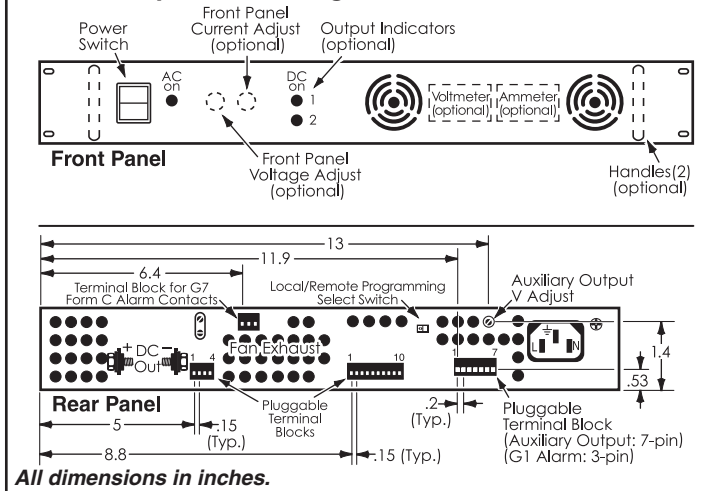

Digital Interface option (Rear Panel Detail)

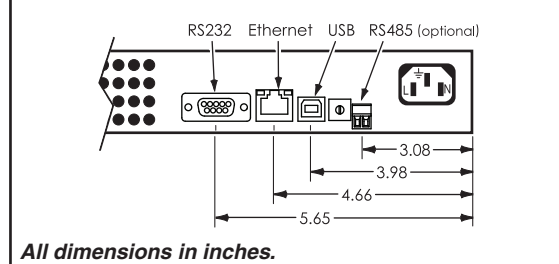

1U SWITCHING REGULATED (to 720 watts)

SINGLE OUTPUT RACK MOUNTING MODELS

Nominal Output Voltage	Adjust Range ±V	Output Current Amps. at		Ripple mV (@ 25 MHz BW)		Effic. (Typ.) %	Model	Case Size
		40°C	71°C	RMS	P-P			
3.3	.25	40	30	15	50	61	W3.3LTU4000	1U13
3.3	.25	70	49	15	50	61	W3.3LTU7000	1U13
5	.25	40	30	15	50	64	W5LTU4000	1U13
5	.25	70	49	15	50	64	W5LTU7000	1U13
6	.25	40	30	15	50	65	W6LTU4000	1U13
6	.25	68	47.6	15	50	65	W6LTU6800	1U13
7	.5	40	29	15	50	65	W7LTU4000	1U13
7	.5	66	46.2	15	50	65	W7LTU6600	1U13
8	.5	39	28	30	100	67	W8LTU3900	1U13
8	.5	64	44.8	30	100	67	W8LTU6400	1U13
9	.5	38.8	27.2	30	100	67	W9LTU3880	1U13
9	.5	62	43.4	30	100	67	W9LTU6200	1U13
10	.5	37.5	26.3	30	100	68	W10LTU3750	1U13
10	.5	60	42	30	100	68	W10LTU6000	1U13
12	1	37.5	26.3	30	100	73	W12LTU3750	1U13
12	1	60	42	30	100	73	W12LTU6000	1U13
13	1	34.6	24.2	30	100	73	W13LTU3460	1U13
13	1	55.4	38.8	30	100	73	W13LTU5540	1U13
14	1	32.1	22.5	30	100	73	W14LTU3210	1U13
14	1	51.4	35.9	30	100	73	W14LTU5140	1U13
15	1	30	21	30	100	73	W15LTU3000	1U13
15	1	48	33.6	30	100	73	W15LTU4800	1U13
16	1	28.1	19.7	30	100	73	W16LTU2810	1U13
16	1	45	31.5	30	100	73	W16LTU4500	1U13
18	1	25	17.5	30	100	75	W18LTU2500	1U13
18	1	40	28	30	100	75	W18LTU4000	1U13
20	1	22.5	15.8	30	100	76	W20LTU2250	1U13
20	1	36	25.2	30	100	76	W20LTU3600	1U13
22	1	20.5	14.4	30	100	76	W22LTU2050	1U13
22	1	32.7	22.9	30	100	76	W22LTU3270	1U13
24	1	18.8	13.2	30	100	78	W24LTU1880	1U13
24	1	30	21	30	100	78	W24LTU3000	1U13
25	1	18	12.6	30	100	78	W25LTU1800	1U13
25	1	28.8	20.2	30	100	78	W25LTU2880	1U13
26	1	17.3	12.1	30	100	78	W26LTU1730	1U13
26	1	27.7	19.4	30	100	78	W26LTU2770	1U13
28	1	16	11.2	30	100	78	W28LTU1600	1U13
28	1	25.7	18	30	100	78	W28LTU2570	1U13
30	1	15	10.5	45	150	78	W30LTU1500	1U13
30	1	24	16.8	45	150	78	W30LTU2400	1U13

Nominal Output Voltage	Adjust Range ±V	Output Current Amps. at		Ripple mV (@ 25 MHz BW)		Effic. (Typ.) %	Model	Case Size
		40°C	71°C	RMS	P-P			
32	1	14	9.8	45	150	78	W32LTU1400	1U13
32	1	22.5	15.8	45	150	78	W32LTU2250	1U13
34	1	13.2	9.3	45	150	78	W34LTU1320	1U13
34	1	21.2	14.8	45	150	78	W34LTU2120	1U13
36	1	12.5	8.8	45	150	78	W36LTU1250	1U13
36	1	20	14	45	150	78	W36LTU2000	1U13
38	1	11.8	8.3	45	150	78	W38LTU1180	1U13
38	1	18.9	13.2	45	150	78	W38LTU1890	1U13
40	1	11.3	7.9	45	150	79	W40LTU1130	1U13
40	1	18	12.6	45	150	79	W40LTU1800	1U13
42	1	10.7	7.5	45	150	79	W42LTU1070	1U13
42	1	17.1	12	45	150	79	W42LTU1710	1U13
45	1	10	7	45	150	79	W45LTU1000	1U13
45	1	16	11.2	45	150	79	W45LTU1600	1U13
48	1	9.4	6.6	45	150	79	W48LTU940	1U13
48	1	15	10.5	45	150	79	W48LTU1500	1U13
50	1	9	6.3	44	150	79	W50LTU900	1U13
50	1	14.4	10	44	150	79	W50LTU1440	1U13
55	1	8.2	5.7	44	150	79	W55LTU820	1U13
55	1	13.1	9.2	44	150	79	W55LTU1310	1U13
60	1	7.5	5.3	44	150	79	W60LTU750	1U13
60	1	12	8.4	44	150	79	W60LTU1200	1U13
70	1	6.4	4.5	66	225	79	W70LTU640	1U13
70	1	10.3	7.2	66	225	79	W70LTU1030	1U13
75	1	6	4.2	66	225	79	W75LTU600	1U13
75	1	9.6	6.7	66	225	79	W75LTU960	1U13
80	1	5.6	3.9	66	225	79	W80LTU560	1U13
80	1	9	6.3	66	225	79	W80LTU900	1U13
90	1	5	3.5	66	225	79	W90LTU500	1U13
90	1	8	5.6	66	225	79	W90LTU800	1U13
100	1	4.5	3.2	88	300	79	W100LTU450	1U13
100	1	7.2	5	88	300	79	W100LTU720	1U13
110	1	4.1	2.9	88	300	79	W110LTU410	1U13
110	1	6.5	4.5	88	300	79	W110LTU650	1U13
120	1	3.8	2.7	88	300	79	W120LTU380	1U13
120	1	6	4.2	88	300	79	W120LTU600	1U13
125	1	3.6	2.5	88	300	79	W125LTU360	1U13
125	1	5.7	4	88	300	79	W125LTU570	1U13
135	1	3.3	2.3	103	350	79	W135LTU330	1U13
135	1	5.3	3.7	103	350	79	W135LTU530	1U13



1U RACK & BENCHTOP

1U SWITCHING REGULATED (to 720 watts)

SINGLE OUTPUT BENCHTOP MODELS

SWITCHING REGULATED AC-DC

Nominal Output Voltage	Adjust Range $\pm V$	Output Current Amps. at		Ripple mV (@ 25 MHz BW)		Effic. (Typ.) %	Model	Case Size
		40°C	71°C	RMS	P-P			
3.3	.25	40	30	15	50	61	W3.3LTB4000	1B13
3.3	.25	70	49	15	50	61	W3.3LTB7000	1B13
5	.25	40	30	15	50	64	W5LTB4000	1B13
5	.25	70	49	15	50	64	W5LTB7000	1B13
6	.25	40	30	15	50	65	W6LTB4000	1B13
6	.25	68	47.6	15	50	65	W6LTB6800	1B13
7	.5	40	29	15	50	65	W7LTB4000	1B13
7	.5	66	46.2	15	50	65	W7LTB6600	1B13
8	.5	39	28	30	100	67	W8LTB3900	1B13
8	.5	64	44.8	30	100	67	W8LTB6400	1B13
9	.5	38.8	27.2	30	100	67	W9LTB3880	1B13
9	.5	62	43.4	30	100	67	W9LTB6200	1B13
10	.5	37.5	26.3	30	100	68	W10LTB3750	1B13
10	.5	60	42	30	100	68	W10LTB6000	1B13
12	1	37.5	26.3	30	100	73	W12LTB3750	1B13
12	1	60	42	30	100	73	W12LTB6000	1B13
13	1	34.6	24.2	30	100	73	W13LTB3460	1B13
13	1	55.4	38.8	30	100	73	W13LTB5540	1B13
14	1	32.1	22.5	30	100	73	W14LTB3210	1B13
14	1	51.4	35.9	30	100	73	W14LTB5140	1B13
15	1	30	21	30	100	73	W15LTB3000	1B13
15	1	48	33.6	30	100	73	W15LTB4800	1B13
16	1	28.1	19.7	30	100	73	W16LTB2810	1B13
16	1	45	31.5	30	100	73	W16LTB4500	1B13
18	1	25	17.5	30	100	75	W18LTB2500	1B13
18	1	40	28	30	100	75	W18LTB4000	1B13
20	1	22.5	15.8	30	100	76	W20LTB2250	1B13
20	1	36	25.2	30	100	76	W20LTB3600	1B13
22	1	20.5	14.4	30	100	76	W22LTB2050	1B13
22	1	32.7	22.9	30	100	76	W22LTB3270	1B13
24	1	18.8	13.2	30	100	78	W24LTB1880	1B13
24	1	30	21	30	100	78	W24LTB3000	1B13
25	1	18	12.6	30	100	78	W25LTB1800	1B13
25	1	28.8	20.2	30	100	78	W25LTB2880	1B13
26	1	17.3	12.1	30	100	78	W26LTB1730	1B13
26	1	27.7	19.4	30	100	78	W26LTB2770	1B13
28	1	16	11.2	30	100	78	W28LTB1600	1B13
28	1	25.7	18	30	100	78	W28LTB2570	1B13
30	1	15	10.5	45	150	78	W30LTB1500	1B13
30	1	24	16.8	45	150	78	W30LTB2400	1B13

Nominal Output Voltage	Adjust Range $\pm V$	Output Current Amps. at		Ripple mV (@ 25 MHz BW)		Effic. (Typ.) %	Model	Case Size
		40°C	71°C	RMS	P-P			
32	1	14	9.8	45	150	78	W32LTB1400	1B13
32	1	22.5	15.8	45	150	78	W32LTB2250	1B13
34	1	13.2	9.3	45	150	78	W34LTB1320	1B13
34	1	21.2	14.8	45	150	78	W34LTB2120	1B13
36	1	12.5	8.8	45	150	78	W36LTB1250	1B13
36	1	20	14	45	150	78	W36LTB2000	1B13
38	1	11.8	8.3	45	150	78	W38LTB1180	1B13
38	1	18.9	13.2	45	150	78	W38LTB1890	1B13
40	1	11.3	7.9	45	150	79	W40LTB1130	1B13
40	1	18	12.6	45	150	79	W40LTB1800	1B13
42	1	10.7	7.5	45	150	79	W42LTB1070	1B13
42	1	17.1	12	45	150	79	W42LTB1710	1B13
45	1	10	7	45	150	79	W45LTB1000	1B13
45	1	16	11.2	45	150	79	W45LTB1600	1B13
48	1	9.4	6.6	45	150	79	W48LTB940	1B13
48	1	15	10.5	45	150	79	W48LTB1500	1B13
50	1	9	6.3	44	150	79	W50LTB900	1B13
50	1	14.4	10	44	150	79	W50LTB1440	1B13
55	1	8.2	5.7	44	150	79	W55LTB820	1B13
55	1	13.1	9.2	44	150	79	W55LTB1310	1B13
60	1	7.5	5.3	44	150	79	W60LTB750	1B13
60	1	12	8.4	44	150	79	W60LTB1200	1B13
70	1	6.4	4.5	66	225	79	W70LTB640	1B13
70	1	10.3	7.2	66	225	79	W70LTB1030	1B13
75	1	6	4.2	66	225	79	W75LTB600	1B13
75	1	9.6	6.7	66	225	79	W75LTB960	1B13
80	1	5.6	3.9	66	225	79	W80LTB560	1B13
80	1	9	6.3	66	225	79	W80LTB900	1B13
90	1	5	3.5	66	225	79	W90LTB500	1B13
90	1	8	5.6	66	225	79	W90LTB800	1B13
100	1	4.5	3.2	88	300	79	W100LTB450	1B13
100	1	7.2	5	88	300	79	W100LTB720	1B13
110	1	4.1	2.9	88	300	79	W110LTB410	1B13
110	1	6.5	4.5	88	300	79	W110LTB650	1B13
120	1	3.8	2.7	88	300	79	W120LTB380	1B13
120	1	6	4.2	88	300	79	W120LTB600	1B13
125	1	3.6	2.5	88	300	79	W125LTB360	1B13
125	1	5.7	4	88	300	79	W125LTB570	1B13
135	1	3.3	2.3	103	350	79	W135LTB330	1B13
135	1	5.3	3.7	103	350	79	W135LTB530	1B13



1U SWITCHING REGULATED (to 720 watts)

WIDE ADJUST OUTPUT RACK MOUNTING MODELS

Output Voltage Range	Output Current Amps. at		Ripple mV (@ 25 MHz BW)		Effic. (Typ.) %*	Model	Case Size
	40°C	71°C	RMS	P-P			
0-5	40	31	15	50	64	Y05LXU4000	1U13
0-5	70	49	15	50	64	Y05LXU7000	1U13
0-8	40	28	30	100	67	Y08LXU4000	1U13
0-8	64	44	30	100	67	Y08LXU6400	1U13
0-9	38	27	30	100	67	Y09LXU3800	1U13
0-9	62	43	30	100	67	Y09LXU6200	1U13
0-10	37	26	30	100	68	Y010LXU3700	1U13
0-10	60	42	30	100	68	Y010LXU6000	1U13
0-12	37	26	30	100	68	Y012LXU3700	1U13
0-12	60	42	30	100	68	Y012LXU6000	1U13
0-14	32	22	30	100	70	Y014LXU3200	1U13
0-14	51	35	30	100	70	Y014LXU5100	1U13
0-15	30	21	30	100	70	Y015LXU3000	1U13
0-15	48	34	30	100	70	Y015LXU4800	1U13
0-16	28	20	30	100	70	Y016LXU2800	1U13
0-16	45	31	30	100	70	Y016LXU4500	1U13
0-18	25	18	30	100	71	Y018LXU2500	1U13
0-18	40	28	30	100	71	Y018LXU4000	1U13
0-22	20	14	30	100	73	Y022LXU2000	1U13
0-22	32	22	30	100	73	Y022LXU3200	1U13
0-24	18	13	30	100	73	Y024LXU1800	1U13
0-24	30	21	30	100	73	Y024LXU3000	1U13
0-25	18	13	30	100	73	Y025LXU1800	1U13
0-25	28.8	20	30	100	73	Y025LXU2880	1U13
0-30	15	11	45	150	75	Y030LXU1500	1U13
0-30	24	16	45	150	75	Y030LXU2400	1U13
0-35	12.8	9	45	150	75	Y035LXU1280	1U13
0-35	20.5	14	45	150	75	Y035LXU2050	1U13
0-36	12	8	45	150	75	Y036LXU1200	1U13
0-36	20	14	45	150	75	Y036LXU2000	1U13
0-40	11	8	45	150	76	Y040LXU1100	1U13
0-40	18	12	45	150	76	Y040LXU1800	1U13
0-50	9	6	45	150	76	Y050LXU900	1U13
0-50	15	10	45	150	76	Y050LXU1500	1U13
0-60	7.5	5.3	45	150	79	Y060LXU750	1U13
0-60	12	8.4	45	150	79	Y060LXU1200	1U13
0-70	6.4	4.5	66	225	79	Y070LXU640	1U13
0-70	10.3	7.2	66	225	79	Y070LXU1030	1U13
0-75	6	4.2	66	225	79	Y075LXU600	1U13
0-75	9.6	6.7	66	225	79	Y075LXU960	1U13
0-80	5.6	3.9	66	225	79	Y080LXU560	1U13
0-80	9	6.3	66	225	79	Y080LXU900	1U13
0-90	5	3.5	66	225	79	Y090LXU500	1U13
0-90	8	5.6	66	225	79	Y090LXU800	1U13
0-100	4.5	3.2	88	300	79	Y0100LXU450	1U13
0-100	7.2	5	88	300	79	Y0100LXU720	1U13
0-110	4.1	2.9	88	300	79	Y0110LXU410	1U13
0-110	6.5	4.5	88	300	79	Y0110LXU650	1U13
0-120	3.8	2.7	88	300	79	Y0120LXU380	1U13
0-120	6	4.2	88	300	79	Y0120LXU600	1U13
0-125	3.6	2.5	88	300	79	Y0125LXU360	1U13
0-125	5.7	4	88	300	79	Y0125LXU570	1U13
0-135	3.3	2.3	103	350	79	Y0135LXU330	1U13
0-135	5.3	3.7	103	350	79	Y0135LXU530	1U13

WIDE ADJUST OUTPUT BENCHTOP MODELS

Output Voltage Range	Output Current Amps. at		Ripple mV (@ 25 MHz BW)		Effic. (Typ.) %*	Model	Case Size
	40°C	71°C	RMS	P-P			
0-5	40	31	15	50	64	Y05LXB4000	1B13
0-5	70	49	15	50	64	Y05LXB7000	1B13
0-8	40	28	30	100	67	Y08LXB4000	1B13
0-8	64	44	30	100	67	Y08LXB6400	1B13
0-9	38	27	30	100	67	Y09LXB3800	1B13
0-9	62	43	30	100	67	Y09LXB6200	1B13
0-10	37	26	30	100	68	Y010LXB3700	1B13
0-10	60	42	30	100	68	Y010LXB6000	1B13
0-12	37	26	30	100	68	Y012LXB3700	1B13
0-12	60	42	30	100	68	Y012LXB6000	1B13
0-14	32	22	30	100	70	Y014LXB3200	1B13
0-14	51	35	30	100	70	Y014LXB5100	1B13
0-15	30	21	30	100	70	Y015LXB3000	1B13
0-15	48	34	30	100	70	Y015LXB4800	1B13
0-16	28	20	30	100	70	Y016LXB2800	1B13
0-16	45	31	30	100	70	Y016LXB4500	1B13
0-18	25	18	30	100	71	Y018LXB2500	1B13
0-18	40	28	30	100	71	Y018LXB4000	1B13
0-22	20	14	30	100	73	Y022LXB2000	1B13
0-22	32	22	30	100	73	Y022LXB3200	1B13
0-24	18	13	30	100	73	Y024LXB1800	1B13
0-24	30	21	30	100	73	Y024LXB3000	1B13
0-25	18	13	30	100	73	Y025LXB1800	1B13
0-25	28.8	20	30	100	73	Y025LXB2880	1B13
0-30	15	11	45	150	75	Y030LXB1500	1B13
0-30	24	16	45	150	75	Y030LXB2400	1B13
0-35	12.8	9	45	150	75	Y035LXB1280	1B13
0-35	20.5	14	45	150	75	Y035LXB2050	1B13
0-36	12	8	45	150	75	Y036LXB1200	1B13
0-36	20	14	45	150	75	Y036LXB2000	1B13
0-40	11	8	45	150	76	Y040LXB1100	1B13
0-40	18	12	45	150	76	Y040LXB1800	1B13
0-50	9	6	45	150	76	Y050LXB900	1B13
0-50	15	10	45	150	76	Y050LXB1500	1B13
0-60	7.5	5.3	45	150	79	Y060LXB750	1B13
0-60	12	8.4	45	150	79	Y060LXB1200	1B13
0-70	6.4	4.5	66	225	79	Y070LXB640	1B13
0-70	10.3	7.2	66	225	79	Y070LXB1030	1B13
0-75	6	4.2	66	225	79	Y075LXB600	1B13
0-75	9.6	6.7	66	225	79	Y075LXB960	1B13
0-80	5.6	3.9	66	225	79	Y080LXB560	1B13
0-80	9	6.3	66	225	79	Y080LXB900	1B13
0-90	5	3.5	66	225	79	Y090LXB500	1B13
0-90	8	5.6	66	225	79	Y090LXB800	1B13
0-100	4.5	3.2	88	300	79	Y0100LXB450	1B13
0-100	7.2	5	88	300	79	Y0100LXB720	1B13
0-110	4.1	2.9	88	300	79	Y0110LXB410	1B13
0-110	6.5	4.5	88	300	79	Y0110LXB650	1B13
0-120	3.8	2.7	88	300	79	Y0120LXB380	1B13
0-120	6	4.2	88	300	79	Y0120LXB600	1B13
0-125	3.6	2.5	88	300	79	Y0125LXB360	1B13
0-125	5.7	4	88	300	79	Y0125LXB570	1B13
0-135	3.3	2.3	103	350	79	Y0135LXB330	1B13
0-135	5.3	3.7	103	350	79	Y0135LXB530	1B13

1U SWITCHING REGULATED (to 720 watts)

OPTIONAL AUXILIARY OUTPUT

Nominal Output Voltage	Adjust Range ± V	Output Current Amps. at		Ripple mV (@ 25 MHz BW)		Effic. (Typ.) %	Model
		40°C	71°C	RMS	P-P		
3.3	.5	18.5	12.9	10	50	66	3.3NTU1850
5	.5	18.5	12.9	10	50	69	5NTU1850
6	.5	15.4	10.7	10	50	70	6NTU1540
7	.5	15	10.5	10	50	70	7NTU1500
8	.5	14.7	10.3	15	100	72	8NTU1470
9	.5	14.4	10	15	100	72	9NTU1440
10	.5	14.1	9.8	15	100	73	10NTU1410
12	.5	13.7	9.6	15	100	75	12NTU1370
13	.5	12.3	8.6	15	100	75	13NTU1230
14	.5	11.7	8.2	15	100	75	14NTU1170
15	.5	11.1	7.8	15	100	75	15NTU1110
16	.5	10.2	7.1	15	100	75	16NTU1020
18	.5	9.2	6.4	15	100	77	18NTU920
20	.5	8.6	6	15	100	78	20NTU860
22	.5	8	5.6	15	100	78	22NTU800
24	.5	7.5	5.3	15	100	80	24NTU750
25	.5	7.2	5	15	100	80	25NTU720
26	.5	6.9	4.8	15	100	80	26NTU690
28	.5	6.2	4.3	15	100	80	28NTU620
30	.5	5.6	3.9	25	150	80	30NTU560
32	1	5.4	3.7	25	150	80	32NTU540
34	1	5.2	3.6	25	150	80	34NTU520
36	1	5	3.5	25	150	80	36NTU500
38	1	4.7	3.3	25	150	80	38NTU470
40	1	4.3	3	25	150	81	40NTU430
42	1	4.1	2.8	25	150	81	42NTU410
45	1	3.9	2.7	25	150	81	45NTU390
48	1	3.7	2.6	25	150	81	48NTU370
50	1	3.3	2.3	50	150	80	50NTU330
55	1	3	2.1	50	150	80	55NTU300
60	1	2.8	1.9	50	150	80	60NTU280
70	1	2.4	1.7	67	200	80	70NTU240
75	1	2.2	1.5	67	200	80	75NTU220
80	1	2.1	1.4	67	200	80	80NTU210
90	1	1.8	1.3	100	300	80	90NTU180
100	1	1.7	1.2	150	450	80	100NTU170
110	1	1.5	1.1	150	450	80	110NTU150
120	1	1.4	1	150	450	80	120NTU140
125	1	1.3	0.9	150	450	80	125NTU130

AUXILIARY OUTPUT SPECIFICATIONS

Startup Time: 800 mS typical.

Regulation:

Line: ±0.05% or 5 mV, whichever is greater.

Load: ±0.05% or 5 mV, whichever is greater.

Polarity: Output is floating and may be used in either polarity.

Drift: ±0.1% typical over 8 hours, after 30 minute warmup.

Temperature Coefficient: ±0.02%/°C (Typical).

Holdup Time: 16 mS minimum.

Transient Response: 300 µS to return to ±1% of output setting. Maximum of ±3% output excursion following a load step change from 50% to 100%.

Remote Sensing: Compensates up to 0.5 volt drop per output line, within the limits of the output voltage adjustment range.

Overload/Short Circuit Protection: Current limiting with automatic recovery.

Overvoltage Protection: Latches power supply OFF, reset by momentarily removing AC input power.

Output Inhibit: Applying between +3 and +25 Vdc to the inhibit terminal will disable the supply.

Thermal Protection: Thermostat, self-resetting.

How to order using model **W24LTU3000E1G13HM3S-24NTU750** as an example:

W24LTU3000 E1 G13 H M3 S - 24NTU750

Standard Model Number

Choose from standard single or wide adjust outputs (see tables on pages 4 - 6 for available output ratings). Use 'U' for rack mounting, substitute 'B' for benchtop.

Auxiliary Output or Digital Interface Option

Choose to add an auxiliary output (see table on page 7 for available output ratings) or digital interface.

Options

Choose options (see descriptions on page 2. Arrange in alphanumeric order). Note that when combining options 'G1' and 'G3' the result is 'G13'.

All options listed on page C14 apply only to the models listed on pages C16 - C18. The optional Auxiliary Output has only 'Inhibit' functionality in addition to output and sense connections.

ACOPIAN SELLS FACTORY DIRECT WORLDWIDE: We do not use representatives or distributors. Contact Acopian for technical information or a quote.

WARRANTY: Acopian power supplies are warranted to be free from defects in material and workmanship for a period of five years (encapsulated devices, for one year) from date of original shipment. Acopian's obligation under this warranty is limited to repairing any power supply returned to the factory Service Department in Easton, PA or Melbourne, FL, and replacing any defective parts. Mini Encapsulated power supplies are not repairable. Authorization must be obtained from Acopian before a power supply may be returned for repair. Units must be well packed when shipping to Acopian; the repair of any damage incurred during shipment will be charged. Transportation charges are to be paid by the purchaser. A reinspection and handling charge will be applied to returned units found to have no defects. If a failure has been caused by misuse, operation in excess of specifications, or modification by the customer, repairs will be billed at cost; in such cases, a cost estimate will be submitted before work is started.

Acopian reserves the right to make changes or improvements in its products without incurring any obligation to install the same on products previously manufactured.

This warranty is in lieu of all other warranties, obligations, and liabilities, expressed or implied, and is the purchaser's exclusive remedy. Acopian makes no warranty, either express or implied, of merchantability, fitness for a particular purpose or otherwise. In no event shall Acopian be liable whether in contract, tort, or negligence, for special, indirect, incidental or consequential damages of any kind, including loss of business or profits, or any other losses incurred by the purchaser or any third party, the Customer's remedies being limited, at Acopian's option, to replacement, repair or credit at the price on the date of claim.

The validity, performance and construction of all terms and conditions and any sale made by Acopian shall be determined by the law of Pennsylvania, without regard to its conflict of law principles, and all parties to the transaction expressly consent to the jurisdiction of such courts and consent to the venue of the Court of Common Pleas for Northampton County, Pennsylvania.

PRICES: The prices shown are F.O.B. our factory; Easton, PA or Melbourne, FL. ('EXW Factory' if outside the 50 United States.) All prices and specifications are subject to change without notice.

TERMS: Net 30 days, subject to credit approval. Visa, MasterCard and American Express also accepted.

SHIPPING: Location permitting, small shipments are made by United Parcel Service, FedEx, DHL (international orders) or by Parcel Post; larger shipments, by insured motor freight collect. Shipments can be made by air upon request. Risk of loss shall be F.O.B. Our Factory, even in cases where freight may be prepaid or allowed to destination by Acopian. If equipment is received in damaged condition, it is the customer's responsibility to contact the carrier and file a claim for damages.

TIME FOR DELIVERY: The time for delivery quoted by Acopian is the time required to ship from our plants. We will not be liable for delays in delivery caused by any reason beyond our control, including but not limited to acts of God, casualty, civil disturbance, labor disputes, transportation or supply difficulties, or any interruption of our facilities, and the quoted time for delivery shall be extended during the continuance of such conditions and for a reasonable time thereafter. In no event will Acopian be liable for any premium transportation, procurement, or similar costs incurred by the Customer as a result of conditions beyond Acopian's control resulting in Acopian's inability to deliver product in accordance with customer's requested delivery schedules.

QUANTITY DISCOUNTS: Discounts are available to quantity buyers and are dependent upon the order quantity and the manufacturing scheduling anticipated by the order, and apply only to the quantity and delivery ordered. Partial shipments are considered as separate orders for discounting purposes.

EXPORT ORDERS: A minimum export documentation charge of \$60.00 applies. (A minimum charge of \$25.00 applies on orders to certain U.S. territories requiring customs forms.)

MOISTURE/FUNGUS PROOFING: Power supplies can be furnished with a moisture and fungus resistant varnish applied to interior surfaces. To order, add the suffix letter F to the model number. This option requires two additional days and is not available on High Voltage, Mini Encapsulated, Rack Mounting, and Gold Box Switching models.

TAGGING: Add \$10.00 to price.

TEST DATA: Cost, \$35.00 or 2% of order, whichever is greater.

SPECIAL MODELS/MODIFICATIONS: Cataloged models can be altered at the factory to meet special requirements. Contact the Applications Engineering Department to discuss your needs.

PARTS: The designs used in Acopian power supplies utilize standard components to the greatest practical extent. When replacements are required, the types originally used, or their equivalents, can usually be obtained most quickly from a local electronic components distributor.

Special components, such as transformers, are stocked at the factory warehouses. Contact the Applications Engineering Department for information on the parts required, referencing the model number of the power supply, the circuit designation of the component, and a description.

PURCHASE ORDER ACCEPTANCE: Orders are accepted subject to Acopian's Terms and Conditions. Any Terms and Conditions of any Purchaser's order, agreement, or understanding which are in addition to or inconsistent with Acopian's shall not be binding upon Acopian unless made in writing and accepted over the signature of an authorized officer of Acopian. Orders shall not be considered accepted until entered into production at our plant. Acopian reserves the right to refuse any order. All typographical and clerical errors are subject to correction by Acopian.

RETURNED GOODS: Acopian products are built on a per-order basis, and ordinarily no credit can be extended for their return. No goods will be accepted for return unless authorized in writing by Acopian.

CHANGES: The customer may, by a written notice, request changes within the general scope of the order, in the drawings, designs or specifications; method of shipment; and place of delivery. If any such change causes an increase or decrease in the cost, or the time required for the processing of any part of the order, an equitable adjustment shall be made in the price or delivery schedule, or both, and the order shall be modified in writing accordingly.

CANCELLATION: Suspension or cancellation of orders may be made only upon our written approval and on terms that will indemnify us against all loss.

OVERTIME: It is anticipated that any order will be processed during regular working hours on regular working days. If for any reason the Purchaser requests Acopian to process the order, or any portion of it, outside of such regular working hours, any overtime or other additional expense occasioned thereby shall be billed to and paid by the Purchaser as an extra cost. Acopian reserves the right to decline to process the order outside regular working hours.

CUSTOMER DELAY OF WORK: If the performance of all or any part of the work is delayed or interrupted by Customer's failure to act within the time specified (or within a reasonable time if no time is specified) and such act is not expressed or implied by the order, an adjustment shall be made in the cost of performance of the order caused by such delay or interruption and the order modified in writing accordingly. Adjustment will also be made in the delivery or performance dates and any other contractual provisions affected by such delay or interruption.

GOVERNMENT SPECIFICATIONS: Pricing is based upon industrial-grade construction, marking, packing, and packaging. Exception is taken to any MIL specifications, and to any requirements for the use of special forms, documentation other than quoted, and Government Source Inspection. Acopian must decline to quote on any other basis.

APPLICATIONS ASSISTANCE: *Questions regarding the specifications, features, and use of any Acopian product should be directed to the Applications Engineering Department. A staff of power supply specialists will be pleased to assist you.*

ACOPIAN IS AN ISO 9001 CERTIFIED COMPANY