

Multifunctional time delay relay

MFT U31S, MFT U41SE



MFT U31S

- **8 Functions, 8 time ranges**
- **Multivoltage:**
24 Vac / dc
110 ... 240 Vac
- **2 output contacts**

Functions

- E** Delay on
- E** Delay on - version with control contact as opening contact
- A** Delay off without auxiliary voltage
- B2** Cycling timer starting on a pause
- S1** Stop monitoring with control contact
- I1** Pulse limitation timer voltage control
- I2** Pulse extension with control contact
- W2** Wiping on trailing edge
- E1** Delay on with control contact

Time end ranges

Adjustment range 0,05 s ... 30 days (MFT U31S)

Adjustment range 0,05 s ... 10 days (MFT U41SE)

Output relay

1 change over and 1 immediate contact (MFT U31S)

1 change over and 1 closing contact potential free (MFT U41SE)

250 Vac 5 A units close together, 8 A units not close together



MFT U41SE

Indicators

Green LED ON: indication of supply voltage

Green LED flashes: indication of time

Yellow LED ON/OFF: indication of relay output

Connecting voltage

24 Vac/dc $\pm 10\%$ and 110 ... 240 Vac -15% +10%

48 ... 63 Hz, 100% duration of operation, IEC class 1c

Reference data

Selectron® MFT	Article no.
MFT-U31S	41140003
MFT-U41SE	41140004


(Order data see chapter 1)

Multifunctional time delay relay

MFT U31S, MFT U41SE

Technical data	
Nominal consumption MFT U31S, MFT U41SE	
24 Vac/dc	1,5 VA / 1 W
110 Vac	2 VA / 1 W
240 Vac	11 VA / 1,4 W
Control contact / Voltage controlled	
Parallel switching of loads possible	
Parallel minimum load	1 VA or 0,5 W
Voltage dependence:	The potential between connections 2 and 5, resp. 7 and 5, must cover 90% of the supply voltage
Connecting length between connections 10 and 5:	10 m or capacity <10 nF
Resistance	>1 MΩ (contact K2 open)
Rest current at parallel load:	approx. 2 mA at contact K2 open
Accuracy	
Scale limit stops	±0,5%
Repeatability	
of the scale limit at constant conditions	±5 ms or <0,5%
Adjustment accuracy	<5% of scale limit
Temperature influence	≤0,01% / °C
Reaction times	
Operating return time K1	max. 60 ms / 30 ms
Reaction time K2	max. 30 ms
Min. pulse/pause time K2	ac 50 ms / dc 50 ms
Recovery time	max. 100 ms

Type key

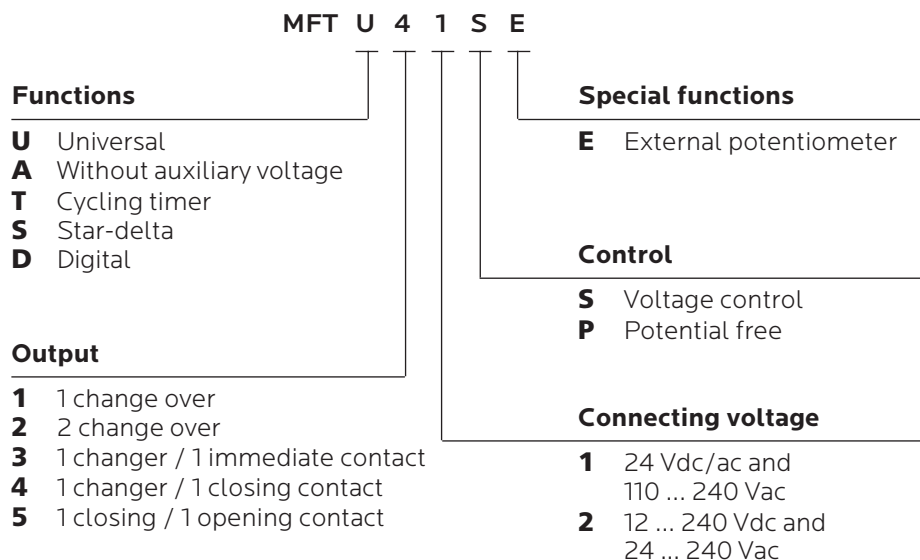

Multifunctional time delay relay

MFT U31S, MFT U41SE

Function descriptions

E - Delay on


When the supply voltage U (K1 closed) is applied, the set interval t begins (green LED U/t flashes). After the interval t



has expired (green LED U/t illuminated) the output relay switches into on-position (yellow LED illuminated). This status remains until the supply voltage U (K1 opened) is interrupted. If the supply voltage U is interrupted before expiry of the interval t, the interval already expired is erased and is restarted when the supply voltage U (K1 closed) is next applied.

E - Delay on - version with control contact as opening contact


The supply voltage U must be constantly applied to the device (green LED U/t illuminated). When the control



contact K2 is opened, the set interval t begins (green LED U/t flashes). This status remains until the control contact K2 is opened again. If the control contact K2 is closed before the interval t has expired, the interval already expired is erased and is restarted with the next cycle.

A - Delay off

The supply voltage U (K1 closed or permanently connected) must be constantly applied to the device (green LED U/t illuminated).




When the control contact K2 is closed, the output relay R switches into on-position (yellow LED illuminated). If the control contact K2 is opened, the set interval t begins (green LED U/t flashes). After the interval t has expired (green LED U/t illuminated) the output relay switches into off-position (yellow LED not illuminated).

If the control contact K2 is closed again before the interval t (green LED U/t illuminated) has expired, the interval already expired is erased and is restarted with the next cycle.

B2 - Cycling timer starting on a pause


When the supply voltage U is applied, the set interval t begins (green LED U/t flashes). After the interval t has



expired, the output relay R switches into on-position (yellow LED illuminated) and the set interval t begins again. After the interval t has expired, the output relay switches into off-position (yellow LED not illuminated). The output relay is triggered in the ratio 1:1 until the supply voltage is interrupted.

S1 - Stop monitoring with control contact

Us is permanently connected via K1. The output relay switches immediately, independently of K2 (green LED



U/t and yellow LED illuminated) and after that the first positive edge of K2 starts the time t (green LED flashes). Each additional positive edge of K2 which arrives before the expiry of the time sequence starts the time t again and the output relay stays in active mode. After expiry of the time t the output relay switches into off-position (yellow LED not illuminated) and the unit is interlocked against all following edges of K2 (memory). The sequence can only be restarted by a new opening and closing again of K1.

I1 - Pulse limitation timer voltage control

When supply voltage U (K1 closed) is applied, the output relay R switches into on-position (yellow LED



illuminated) and the set interval t begins (green LED U/t flashes). After the interval t has expired (green LED U/t illuminated) the output relay switches into off-position (yellow LED not illuminated). This status remains until the supply voltage (K1 opened) is interrupted. If the supply voltage is interrupted before the interval t has expired, the output relay switches into off-position. The interval t already expired is erased and is restarted when the supply voltage is next applied.


Multifunctional time delay relay

MFT U31S, MFT U41SE

Function descriptions

I2 - Pulse extension with control contact

The supply voltage U (K1 closed or permanently connected) must be constantly applied to the device (green LED U/t illuminated). When the control contact K2 is closed, the




output relay R switches into on-position (yellow LED illuminated) and the set interval t begins (green LED U/t flashes). After the interval t has expired (green LED U/t illuminated) the output relay switches into off-position (yellow LED not illuminated).

During the interval, the control contact K2 can be operated any number of times. A further cycle can only be started when the cycle run has been completed.

W2 - Wiping on trailing edge

The supply voltage U (K1 closed or permanently connected) must be constantly applied to the device (green LED U/t illuminated).

Closing the control contact K2 has no influence on the




condition of the output relay R. When the control contact K2

is opened, the output relay switches into on-position (yellow LED illuminated) and the set interval t begins (green LED U/t flashes). After the interval t has expired (green LED U/t illuminated), the output relay switches into off-position (yellow LED not illuminated). During the interval, the control contact K2 can be operated any number of times. A further cycle can only be started when a cycle run has been completed.

E1 - Delay on with control contact

The supply voltage U (K1 closed or permanently connected) must be constantly applied to the device (green LED U/t illuminated).



When the control contact K2 is closed, the set interval t





begins (green U/tLED flashes). After the interval t has expired (green LED U/t illuminated) the output relay R switches into on-position (yellow LED illuminated). This status remains until the control contact K2 is opened. If the control contact K2 is opened before the interval t has expired, the interval already expired is erased and is restarted with the next cycle.

Connection

MFT U31S



MFT U41SE

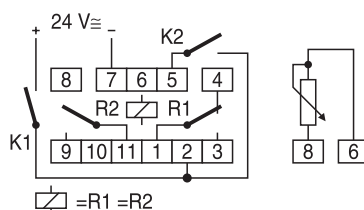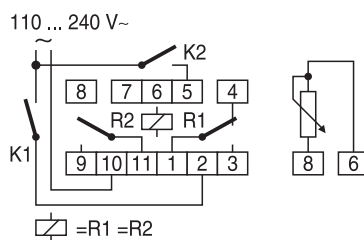


Multifunction time delay relay


MFT U31S, MFT U41SE

Load limit curves


MFT U31S

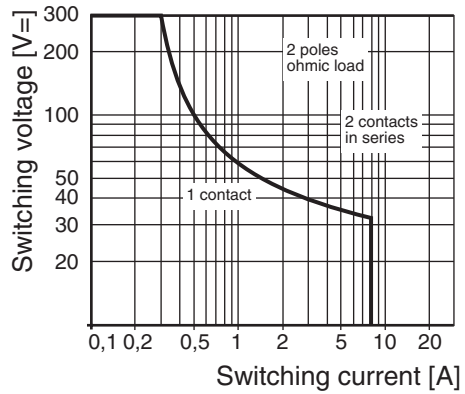


MFT U41SE

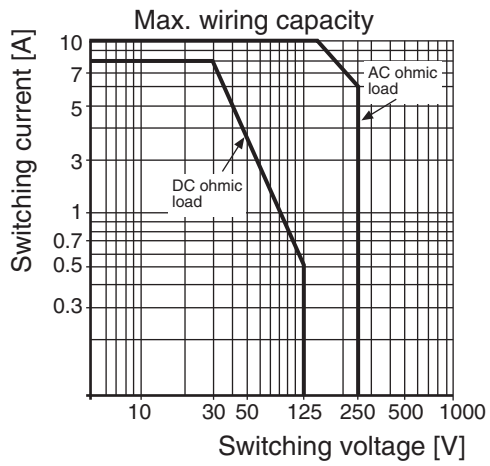


Dimensions

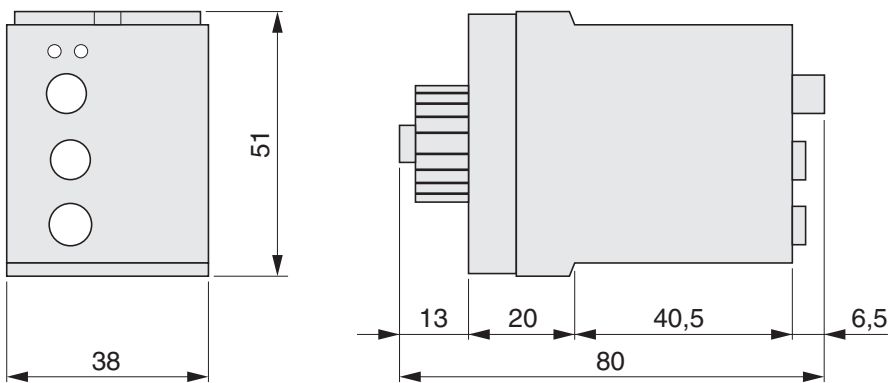

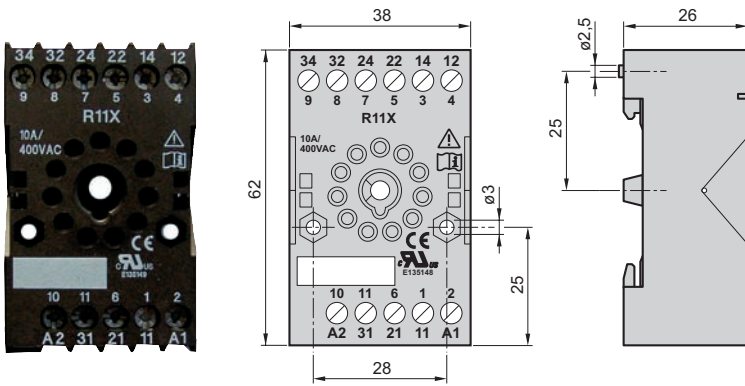

Plug in socket


Plug in socket 11 poles	Article no.
SSK 11 N	41910006
(Order data see chapter 1)	

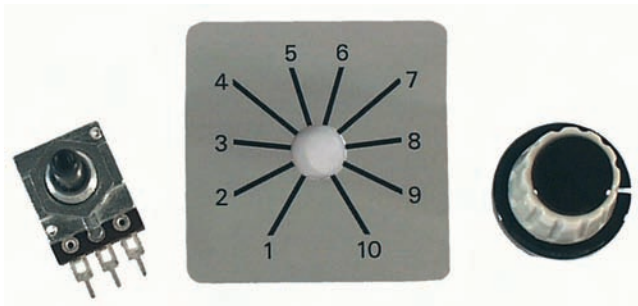


External potentiometer

Potentiometer POTSET	
Resistor	1 MΩ
Article no.	41920033
(Order data see chapter 1)	

Potentiometer, turning knob and scale are included in the delivery

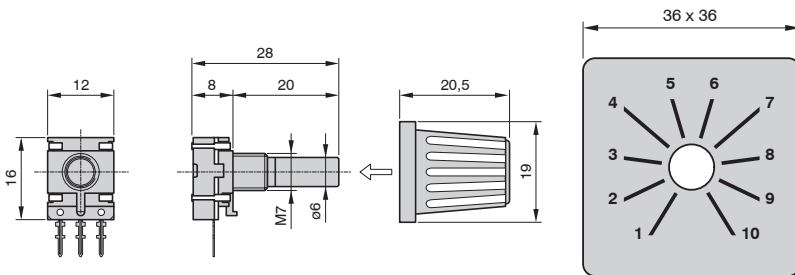

Potentiometer EXPOT 1	
Resistor	1 MΩ
Angle of rotation	295 °
Front protection	IP 64
Mounting diameter	22,5 mm
Connection	Screw terminals
Article no.	41920034
(Order data see chapter 1)	

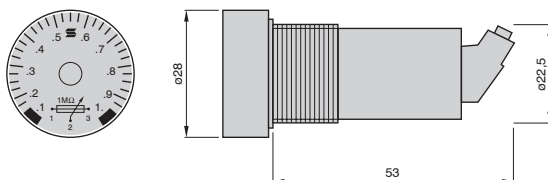

Technical safety advice

This manual contains the information necessary for the correct utilisation of the products described therein. It is intended for technically qualified persons who are involved as either

- planning engineers familiar with the safety concepts of automation technology;
- or, operating personnel, who have been instructed in handling automation equipment and have a knowledge of the contents of this manual concerning operation;
- or, installation and servicing personnel possessing the necessary training to repair such an automation system or who have the authority to put such circuits and equipment/systems into operation, to earth or label them according to the relevant safety standards.

The products are constructed, manufactured and tested in compliance with the relevant VDE standards, VDE specifications and IEC recommendations.

Danger warning

These warnings serve both as a guide for those persons involved in a project and as safety advice to prevent damage to the products themselves or to associated equipment.

Due to advancements in technology, the wiring diagram on the actual device may be different than shown in this catalogue. In all instances where the actual device diagram is different, the wiring diagram on the device must be used when electrical connections are made.

Correct utilisation, configuration and assembly

The equipment is to be used only for the applications stated in the catalogue and technical literature, and only in conjunction with auxiliary equipment and devices that are recommended or approved by Selectron Systems Ltd.

Further, it should be noted that:

- the automation equipment must be disconnected from any power supply before it is assembled, disassembled or the configuration modified.

- Solid state electronic switches must not be tested with incandescent lamps or connected to a load that exceeds its rating.
- trouble-free and safe operation of the products requires correct transportation as well as appropriate storage, assembly and wiring.
- the systems may only be installed by trained personnel. In doing so, the relevant requirements contained in VDE 0100, VDE 0113, IEC 364, etc. must be complied with.

Prevention of material damage or personal injury

Additional external safety devices or facilities must be provided wherever significant material damage or even personal injury could result from a fault occurring in an automation system. A defined operating status must be ensured or forced by such devices or facilities (e.g. by independent limit switches, mechanical interlocks, etc.).

Advice concerning planning and installation of the products

- The safety and accident prevention measures applicable to a specific application are to be observed.
- In the case of mains-operated equipment, a check is to be made before putting it into operation to ensure that the preset mains voltage range is suitable for the local supply.
- In the case of a 24 V supply, care must be taken to ensure sufficient electrical insulation of the secondary side. Use only mains power supply units that conform to IEC 364-4-41 or HD 384.04.41 (VDE 0100 Part 410).
- Automation systems and their operating elements are to be installed in such a way that they are sufficiently protected against accidental operation.

Warranty

Selectron Systems Ltd. warrants its products to be free from defects in material and workmanship for a period of one year from the date of shipment. All claims under this warranty must be made within thirty (30) days of the discovery of the defect, and all defective products must be returned at the buyer's expense. Buyer's sole and exclusive right will be limited to, at the option of Selectron Systems Ltd., the repair or replacement by Selectron Systems Ltd., of any defective products for which a claim is made.

In all other matters please refer to the "General terms of business" concerning Selectron Systems Ltd.

Note

The information given in this documentation corresponds to the state of development at the time of going to press and is therefore not binding. Selectron Systems Ltd. reserves the right to make alterations in the interests of technical advancement or product improvement at any time without giving reasons for doing so.

Prescriptions and standards

Mechanical data	
Housings in self-extinguishing plastic material. Protection mode IP 40	
Mounting: snapping mode:	Fixing on profile rail according DIN 46277/3 (EN 50 022) Connection via contact protected terminals up to 4 mm ² , protecting mode IP 20
Mounting: plugable mode:	Fixing and connection via 11 pole screw or soldering plug socket Pin arrangement and connection mark according IEC67-1-18a
Environmental conditions	
Admissible environmental temperatures from -25 °C ... +55 °C (corresponds IEC 68-1)	
Storage and transport temperature from -25 °C ... +70 °C	
Application class HVF according DIN 40040, pr IEC 1812-1 (1994) and IEC 721-3-3 class 3K3	
Output relay	
Electrical lifetime:	230 Vac, min. 400'000 switching cycles at 5 A ohmic.
Mechanical lifetime:	min. 30 x 10 ⁶ switching cycles
Contact material	AgNi 0,15
Supply voltage	
Frequency range	48 ... 63 Hz
Duty cycle	100%, IEC class 1c
Protection	
Protection of the unit	8 A fast
Terminals	
Contact protection according VDE 0106 and VBG 4	
Terminal arrangement and connecting mark according DIN 46 199	
Terminal type:	sleeve with indirect screw pressure
Wire to connect:	rigid or flexible
Connecting limit:	4 mm ²
Terminal variants:	1 wire 0,5 mm ² ... 2,5 mm ² with/without wire end covers 1 wire 4 mm ² without wire end covers 2 wires 0,5 mm ² ... 1,5 mm ² with/without wire end covers 2 wires 2,5 mm ² flexible without wire end covers
max. screw in torque: 1,0 Nm	
Terminal screw for screw driver or Pozi drive PZ-1	
Insulation	
Isolation nominal voltage:	250 Vac (corresponds to IEC 664-1)
Rating surge voltage:	4 kV, over-voltage category III, corresponds to IEC 664-1
Electromagnetic compatibility	
Electrostatic discharge: Level 3, 6 kV contact, 8 kV air (corresponds to IEC 1000-4-2)	
High frequency electromagnetic fields: Level 3, 10 V/m (corresponds to IEC 1000-4-3)	
Fast transients: Level 4, 4 kV / 2,5 kHz, 5/50 ns (corresponds to IEC 1000-4-4)	
Lightning discharge: Level 3, 2 kV com., 1 kV dif., (corresponds to IEC 1000-4-5)	
Cable running disturbances inducted by HF fields: Level 3, 10 V RMS (corresponds to IEC 1000-4-6)	
Spurious radiation net and aerial network: Class B (corresponds to CISPR 22)	
Prescriptions	
Air and leakage paces:	VDE 0110iGr. C/250
Test voltage:	VDE 0435 2000Vac
Low voltage directions according to IEC 664-1	
EMC emissions:	EN 50 081-1 and EN 55 022 class B
EMC interference stability:	Voltage impact strength according to IEC 1000-4-5
Burst:	EN 50 082-2, EN 61 812-1 (level 3)
ESD:	IEC 1000-4-2
HF over metallic circuits:	EN 50 082-2, ENPr 50141
Electro magnetic HF field according to	EN 50 082-2, ENPr 50140 and ENPr 50204
Production standard:	according to ISO 9001