

the all-round sanding belt for unalloyed steel and non-ferrous metals

As a specialist product designed for dry sanding and high stock removal rates as well as excellent edge stability and tear resistance, 2820 siamet is suitable for a wide variety of jobs ranging from removal of rust or paint to preparation for welding - whether on unalloyed steels or non-ferrous metals.

Advantages

- High edge stability, high initial tearing resistance
- High performance for all metals
- Aggressive cut



Applications


- Removal of paint
- Removal of rust
- Weld preparation
- Removing discolouration
- Sanding down
- Surface treatment
- Deburring
- Smoothing and blending of flaws

Product profile

Grit type: Zirconia alumina
 Backing: y-wt cloth
 Coating: Closed
 bonding: resin over resin
 Coating: Cooling additive

Properties



The following properties refer to the materials used in the main application:

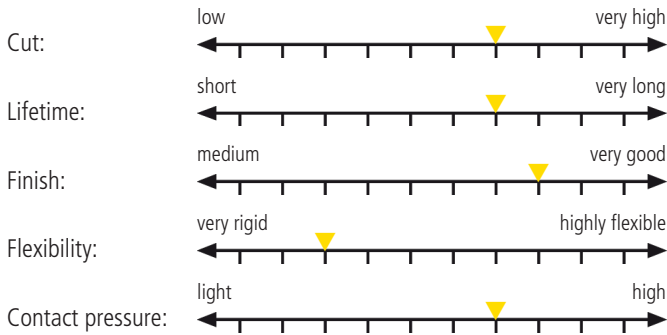

Materials

Unalloyed / low-alloy steel; Non-ferrous metals

Application

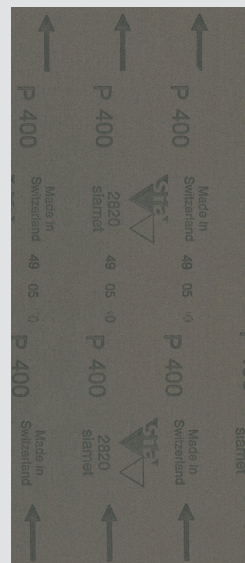

16				
20				
24				
30				
36	■			■
40	■			
50	■			
60	■			
80	■			
100	■			■
120	■			
150	■			
180	■			
220	■			
240	■			
280	■			
320	■			
360				
400	■			
500				
600				
800				
1000				
1200				
1500				
2000				
2500				
3000				
4000				

plain
 siafast
 sia-soft
 SKF