


**SERIES ULYSSE
ENCLOSURE
CODE 415002**

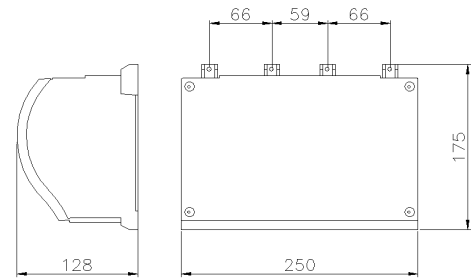

Datasheet

Specifications

Net Weight	0.3 KG
Shock resistance	IK10 second IEC/EN 62262
Protection degree	IP66/IP67
Manufacturing material	Thermosetting halogen free
Height Box	120 mm
Execution	Wall mounting
Cover Type	Blind
Outfit	WITHOUT PLATE
Insulation Class	II
Dimensions	250X175X128 mm
Hole type	Pg21
Number of entries in enclosure	2
Cover height	54,9 mm
ColourColour	RAL 5015 (Cover)RAL 7035 (Base)
Min. Amb. Temp.	-25 °C
Max. Amb. Temp.	+50°C
Storage room temperature MIN	-50°C
Storage room temperature MAX	+80°C
Resistance Glow Wire	960 °C
UL94 Flamability	V-0

Warranties, Reference Standards and Directives

Warranty	1 years
Certification and approval marks	CE, UKR, UKCA
Directives	2014/35/EU (LVD)
Reference Standards	EN 60670-1:2005/AC:2007, EN 60670 22:2006, EN 60670-1:2005/A1:2013, EN 60670-1:2005, EN 60670-1:2005/AC:2010, EN 62208:2011

Note :

The images are purely indicative. Palazzoli reserves the right to make changes without notice.