

OBIS Galaxy Integrated Laser System

8-Wavelength,
One Fiber Output
Illumination System


The flexible and modular design of the OBIS Galaxy Integrated Laser System enables users to combine up to eight predetermined wavelength OBIS lasers into one fiber. Standard configurations are offered with three, four, or five OBIS lasers pre-loaded. Each can be expanded up to a total of eight lasers with the purchase of additional lasers. The output of the combined lasers is delivered through a 2-meter single-mode polarization-maintaining fiber with an FC/APC connector.

Features and Benefits

- Plug-and-play 8-input, single-output beam combiner
- Compact and low profile
- High-transmission beam combiner with typical 60% throughput per channel
- Fiber FC/APC output connector, optional FC/PC8

Applications

- Optogenetics
- Endoscopy
- Microscopy
- Cytometry
- Genomics

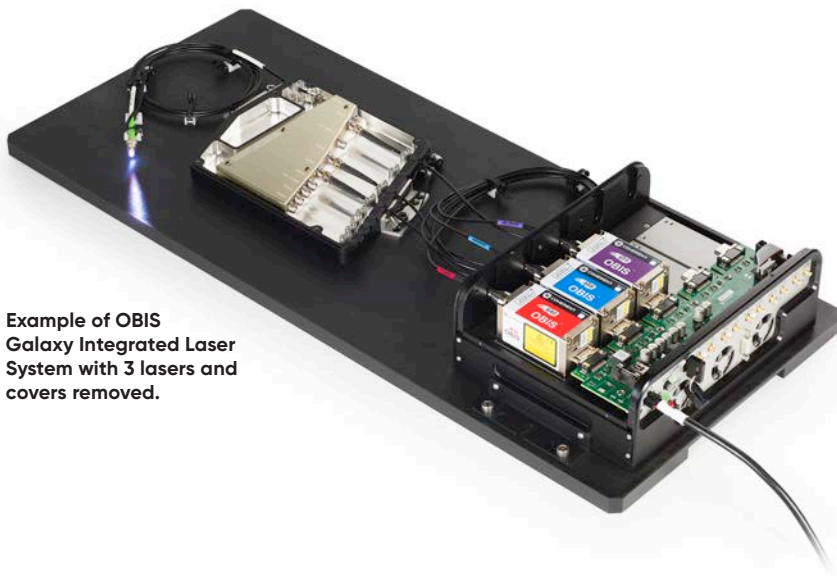

Example of OBIS
Galaxy Integrated Laser
System with 3 lasers and
covers removed.

OBIS Galaxy Integrated Laser System

8-Wavelength, One Fiber Output
Illumination System



Example of Laser Box with 5 lasers loaded.
Cover removed. Purchase a second Laser Box
for applications requiring 6-10 lasers total.



OBIS Galaxy Beam Combiner. 8 fiber input connectors, one
combined output in a 2-meter fiber with FC/PC8 or FC/APC
connector. Example shown is 3 lasers with cover removed.

OBIS Galaxy Integrated Laser System

8-Wavelength, One Fiber Output
Illumination System

OBIS Galaxy Integrated System

The OBIS Galaxy Integrated System is assembled, tested, and shipped on a 711 x 305 mm (28 x 12 inch) plate. Add additional OBIS Galaxy lasers (sold separately) to increase your system capabilities.

Example of 3-Laser Galaxy with covers installed and power supply.



OBIS Galaxy Integrated Laser System

8-Wavelength, One Fiber Output
Illumination System

Three-Laser Galaxy Integrated Laser System. Assembled and Tested as a Turn-key System.	Part Number
<p>As a turnkey configuration the OBIS Galaxy Laser Combining System includes:</p> <ol style="list-style-type: none">1. OBIS 405 nm LX 50 mW Fiber Pigtailed Galaxy Laser, FC/UFC2. OBIS 488 nm LX 30 mW Fiber Pigtailed Galaxy Laser, FC/UFC3. OBIS 640 nm LX 75 mW Fiber Pigtailed Galaxy Laser, FC/UFC4. OBIS Galaxy, compatible with 405 nm, 445 nm, 488 nm, 514 nm, 532 nm, 561 nm, 594 nm, 640 nm<ol style="list-style-type: none">a. Includes 2 meter output fiber with FC/APC Connector5. Laser Box, 5-mounting bays (with 50 Ohm Digital Modulation Impedance)<ol style="list-style-type: none">a. Includes power supply and control software6. System pre-assembled, tested, and mounted onto system plate	1311750

3-Laser Galaxy Integrated Laser System shown with covers removed on the Galaxy and Laser Box. Unit ships with covers and power supply.



OBIS Galaxy Integrated Laser System

8-Wavelength, One Fiber Output
Illumination System

Three-Laser Galaxy Integrated Laser System. Assembled and Tested as a Turn-key System.	Part Number
<p>As a turnkey configuration the OBIS Galaxy Laser Combining System includes:</p> <ol style="list-style-type: none">1. OBIS 488 nm LX 100 mW Fiber Pigtailed Galaxy Laser, FC/UFC2. OBIS 561 nm LX 80 mW Fiber Pigtailed Galaxy Laser, FC/UFC3. OBIS 640 nm LX 75 mW Fiber Pigtailed Galaxy Laser, FC/UFC4. OBIS Galaxy, compatible with 405 nm, 445 nm, 488 nm, 514 nm, 532 nm, 561 nm, 594 nm, 640 nm<ol style="list-style-type: none">a. Includes 2 meter output fiber with FC/APC Connector5. Laser Box, 5-mounting bays (with 2000 Ohm Digital Modulation Impedance)<ol style="list-style-type: none">a. Includes power supply and control software6. System pre-assembled, tested, and mounted onto system plate	1451749

3-Laser Galaxy Integrated Laser System shown with covers removed on the Galaxy and Laser Box. Unit ships with covers and power supply.



OBIS Galaxy Integrated Laser System

8-Wavelength, One Fiber Output
Illumination System

Four-Laser Galaxy Integrated Laser System. Assembled and Tested as a Turn-key System.	Part Number
As a turnkey configuration the OBIS Galaxy Laser Combining System includes: 1. OBIS 488 nm LX 100 mW Fiber Pigtailed Galaxy Laser, FC/UFC 2. OBIS 532 nm LS 80 mW Fiber Pigtailed Galaxy Laser, FC/UFC 3. OBIS 594 nm LS 60 mW Fiber Pigtailed Galaxy Laser, FC/UFC 4. OBIS 640 nm LX 75 mW Fiber Pigtailed Galaxy Laser, FC/UFC 5. OBIS Galaxy, compatible with 405 nm, 445 nm, 488 nm, 514 nm, 532 nm, 561 nm, 594 nm, 640 nm a. Includes 2 meter output fiber with FC/APC Connector 6. Laser Box, 5-mounting bays (with 2000 Ohm Digital Modulation Impedance) a. Includes power supply and control software 7. System pre-assembled, tested, and mounted onto system plate	1446060

4-Laser Galaxy Integrated Laser System shown with covers removed on the Galaxy and Laser Box. Unit ships with covers and power supply.



OBIS Galaxy Integrated Laser System

8-Wavelength, One Fiber Output
Illumination System

Five-Laser Galaxy Integrated Laser System. Assembled and Tested as a Turn-key System.	Part Number
<p>As a turnkey configuration the OBIS Galaxy Laser Combining System includes:</p> <ol style="list-style-type: none">1. OBIS 488 nm LX 100 mW Fiber Pigtailed Galaxy Laser, FC/UFC2. OBIS 532 nm LS 80 mW Fiber Pigtailed Galaxy Laser, FC/UFC3. OBIS 561 nm LS 80 mW Fiber Pigtailed Galaxy Laser, FC/UFC4. OBIS 594 nm LS 60 mW Fiber Pigtailed Galaxy Laser, FC/UFC5. OBIS 640 nm LX 75 mW Fiber Pigtailed Galaxy Laser, FC/UFC6. OBIS Galaxy, compatible with 405 nm, 445 nm, 488 nm, 514 nm, 532 nm, 561 nm, 594 nm, 640 nm<ol style="list-style-type: none">a. Includes 2 meter output fiber with FC/APC Connector7. Laser Box, 5-mounting bays (with 2000 Ohm Digital Modulation Impedance)<ol style="list-style-type: none">a. Includes power supply and control software8. System pre-assembled, tested, and mounted onto system plate	2252231

5-Laser Galaxy Integrated Laser System shown with covers removed on the Galaxy and Laser Box. Unit ships with covers and power supply.



OBIS Galaxy Integrated Laser System

8-Wavelength, One Fiber Output
Illumination System

SPECIFICATIONS¹

OBIS Galaxy Laser Combiner for the Integrated System

Power Throughput ² (%) for 405 nm to 590 nm for 640 nm	>45, typical >60 >55, typical >70
Maximum Total Output Power (mW)	<500
RMS Noise (%) (20 Hz to 2 MHz)	<0.5
Peak-to-Peak Noise (%) (20 Hz to 20 kHz)	<2
Fiber Connector Type (input connectors)	FC form-factor, ultra-flat contact FC/UFC with extended-life interface, anti-reflection (AR) coated tip
Polarization Extinction Ratio Loss (%)	<50
Long-Term Power Throughput (%) (8 hours, $\pm 8^{\circ}\text{C}$)	>95
Long-Term Power Throughput (%) (average)	≤ 2 over 1000 hours

OUTPUT FIBER

Fiber Connector Type ³ (distal end), FC/APC	8° angled, with extended-life interface
Fiber Cable Type	3 mm mono-coil
Fiber Cable Length (m) (minimum)	2
Fiber Numerical Aperture (NA) (1/e ²)	0.055
Mode Field Diameter (μm) (typical)	3
Spatial Mode	TEM ₀₀
M ² (Beam Quality) ⁴	≤ 1.1
Fiber Minimum Bend Radius	51 mm (2.0 in.)
Fiber Tensile Load (maximum)	1 kg (2.2 lbs.)

UTILITY AND ENVIRONMENTAL REQUIREMENTS

Dimensions	229 x 170 x 29 mm (9.0 x 6.7 x 1.1 in.)
Weight	1.4 kg (3 lbs.)
Shock Tolerance ⁵ (g) (11 ms)	30
Vibration ⁵ (g-RMS) (20 Hz to 2 kHz)	7.7
Ambient Temperature	
Operating Temperature	10 to 50°C (50 to 122°F) ⁶
Storage Temperature	-20 to 60°C (-4 to 140°F)
Laser Safety Classification ⁷	CLASS 4

¹ System specifications measured at 25°C.

² The OBIS Galaxy Beam Combiner as tested and certified will be >60% power transmission per wavelength as measured with production tooling fixtures.

³ Fiber connector output not compatible for patchcord-to-patchcord connection.

⁴ M² measured with ModeMaster with 90/10 Clip Levels.

⁵ Non-Operational with a before/after change of <10%.

⁶ OBIS LS laser with Operating Temperature of 15 to 40°C (59 to 104°F).



⁷ Class 4 laser product IEC 60825-1 (2007), OEM component, does not comply with 21 CFR 1040.10 and 1040.11.

OBIS Galaxy Integrated Laser System

8-Wavelength, One Fiber Output
Illumination System


MECHANICAL SPECIFICATIONS

OBIS Galaxy

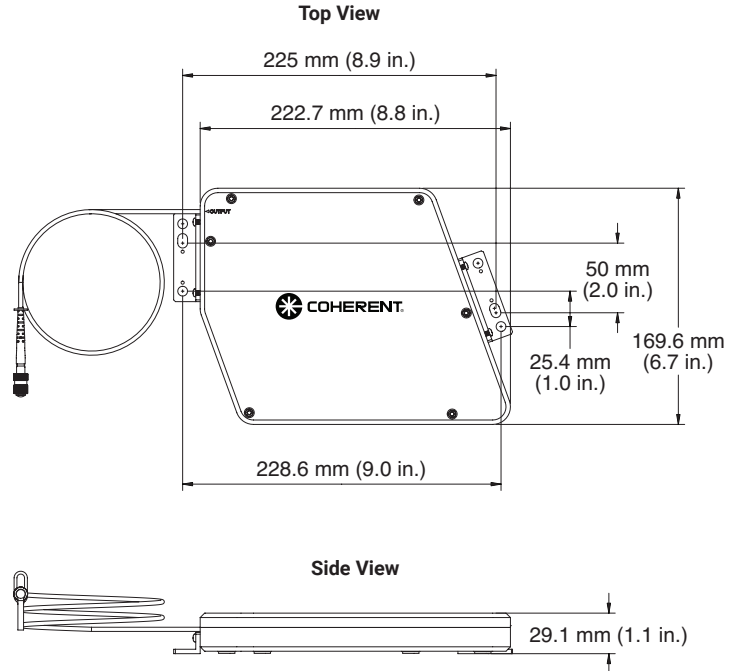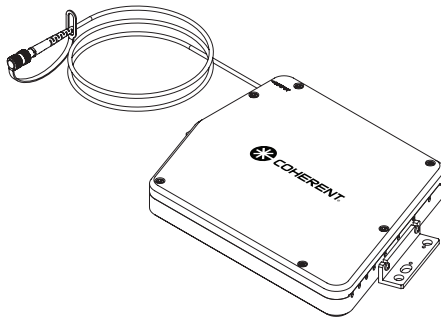

MECHANICAL SPECIFICATIONS

OBIS Laser Box

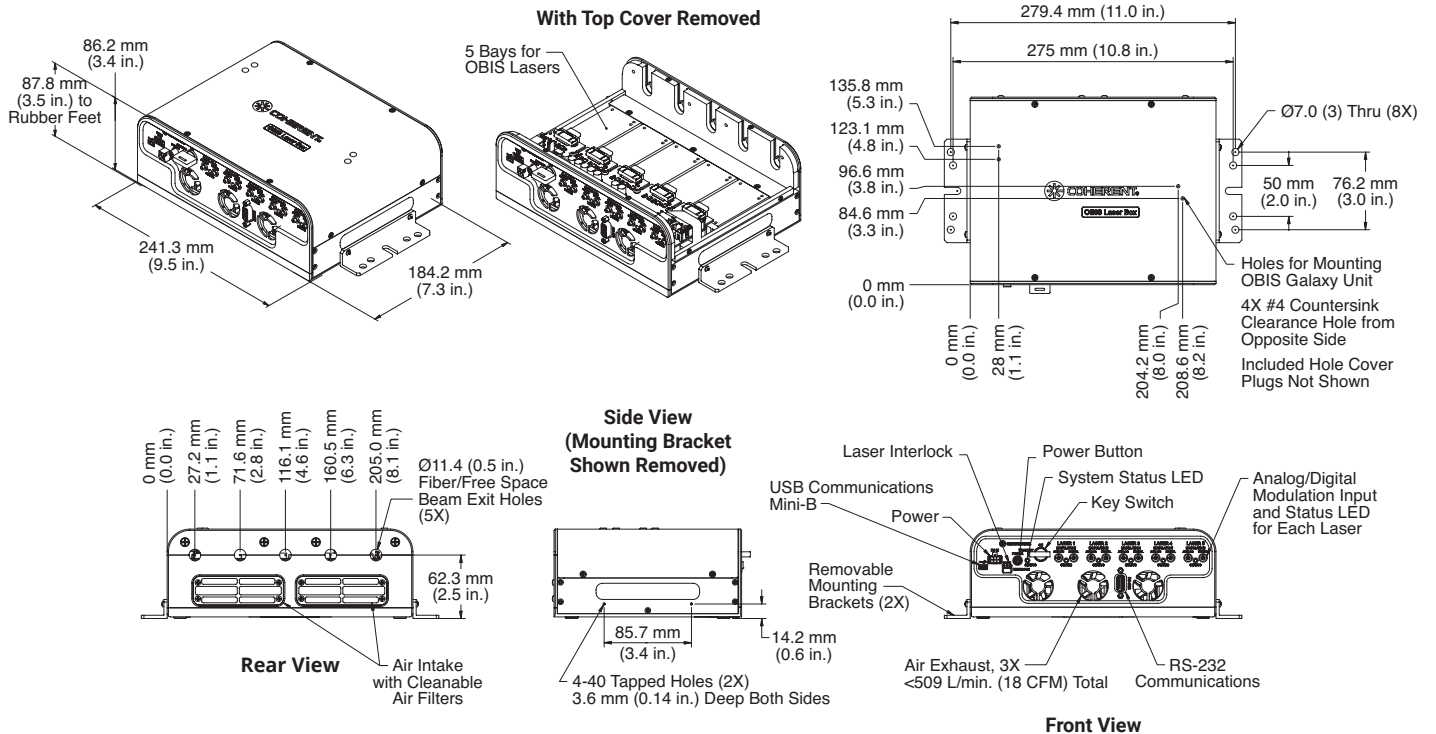


OBIS Galaxy Integrated Laser System

8-Wavelength, One Fiber Output
Illumination System

MECHANICAL SPECIFICATIONS

FC/APC Distal End - Output

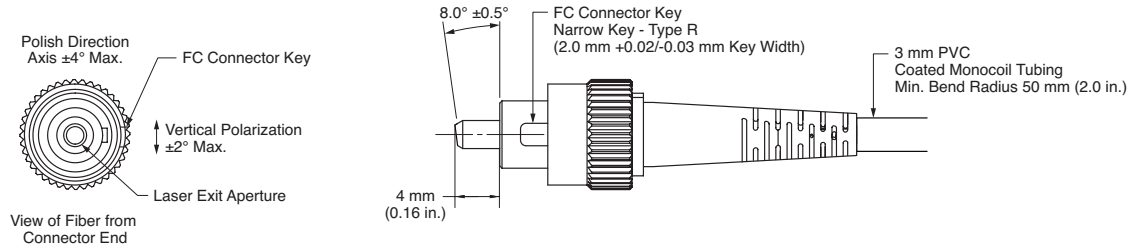

OBIS Galaxy Laser Combiner, Includes Output Fiber - Lasers sold separately	Part Number
8 Input FC/UFC, Single Output FC/APC, 405 nm, 458 nm, 488 nm, 514 nm, 532 nm, 561 nm, 594 nm, 640 nm	2261537
8 input FC/UFC, Single Output FC/PC8, 405 nm, 445 nm, 488 nm, 514 nm, 532 nm, 561 nm, 594 nm, 640 nm	1415671
8 input FC/UFC, Single Output FC/APC, 405 nm, 445 nm, 488 nm, 514 nm, 532 nm, 561 nm, 594 nm, 640 nm	1363484
8 input FC/UFC, Single Output FC/APC, 405 nm, 445 nm, 473 nm, 514 nm, 532 nm, 561 nm, 594 nm, 640 nm	1399474
OBIS FP LX Lasers ¹ for OBIS Galaxy	Part Number
OBIS 405 nm LX 50 mW Laser: Fiber Pigtail: UFC, Galaxy, 404 nm to 406 nm	1236438
OBIS 405 nm LX 100 mW Laser: Fiber Pigtail: UFC, Galaxy, 404 nm to 406 nm	1236439
OBIS 445 nm LX 45 mW Laser: Fiber Pigtail: UFC, Galaxy, 444 nm to 446 nm	1236441
OBIS 458 nm LX 45 mW Laser: Fiber Pigtail: UFC, Galaxy, 457 nm to 459 nm	1236442
OBIS 473 nm LX 50 mW Laser: Fiber Pigtail: UFC, Galaxy, 472 nm to 474 nm	1399476
OBIS 488 nm LX 30 mW Laser: Fiber Pigtail: UFC, Galaxy, 487 nm to 489 nm	1236443
OBIS 488 nm LX 100 mW Laser: Fiber Pigtail: UFC, Galaxy, 487 nm to 489 nm	1236444
OBIS 514 nm LX 50 mW Laser: Fiber Pigtail: UFC, Galaxy, 513 nm to 515 nm	1311150
OBIS 640 nm LX 75 mW Laser: Fiber Pigtail: UFC, Galaxy, 641 nm to 643 nm	1236445
OBIS FP LS Lasers ¹ for OBIS Galaxy	Part Number
OBIS 532 nm LS 80 mW Laser: Fiber Pigtail: UFC, Galaxy, 531 nm to 533 nm	1276599
OBIS 552 nm LS 80 mW Laser: Fiber Pigtail: UFC, Galaxy, 551.5 nm to 553.5 nm	1275619
OBIS 561 nm LS 80 mW Laser: Fiber Pigtail: UFC, Galaxy, 560.5 nm to 562.5 nm	1275608
OBIS 594 nm LS 60 mW Laser: Fiber Pigtailed: UFC, Galaxy, 592 nm to 594 nm	1363485

¹ All OBIS Galaxy FP lasers same as standard OBIS FP lasers with the exception of ± 1 nm center wavelength tolerances and an ultra-flat contact FC/UFC termination with extended-life interface, anti-reflection (AR) coating on fiber tip.

NOTE: OBIS Galaxy Lasers include: laser and mounting hardware. The following needs to be ordered separately: OBIS LaserBox (part numbers 1228877 or 1343229), OBIS Remote (part number 1214875), or OBIS Heat Sink (part number 1193289). See OBIS LX/LS Family datasheet for details.



Coherent, Inc.,
5100 Patrick Henry Drive Santa Clara, CA 95054
p. (800) 527-3786 | (408) 764-4983
f. (408) 764-4646

tech.sales@coherent.com www.coherent.com

Coherent follows a policy of continuous product improvement. Specifications are subject to change without notice. Coherent's scientific and industrial lasers are certified to comply with the Federal Regulations (21 CFR Subchapter J) as administered by the Center for Devices and Radiological Health on all systems ordered for shipment after August 2, 1976.

Coherent offers a limited warranty for all OBIS Galaxy Integrated Laser Systems. For full details of this warranty coverage, please refer to the Service section at www.Coherent.com or contact your local Sales or Service Representative.

MC-012-18-0M0122Rev.C Copyright ©2022 Coherent, Inc.



OBIS Galaxy

8-Laser Beam Combiner

OBIS Galaxy is offering plug-and-play capabilities in laser combining.

The OBIS Galaxy is equipped with 8 FC fiber inputs, and can accept any Galaxy compatible laser using a plug-and-play integration. Each input is optimized to accept the fiber with a FC connection, and Coherent's patented beam combining technology integrates all 8 inputs.

The OBIS Galaxy provides a fiber output of the combined 8 lasers in a single-mode polarization-maintaining fiber, 2 meters in length, with a FC connector for any application.

The OBIS Galaxy matches Coherent's rigorous standards and advanced stress-testing benchmarks, offering the ease of integration, robustness, superior performance, and reliability.

Advantages

- Plug-and-play 8-input, single-output beam combiner
- Compact and low profile
- High transmission beam combiner with typical 60% throughput per channel
- Fiber FC/APC output connector; FC/PC8 output connector available as an option

Applications

- Optogenetics
- Endoscopy
- Spinning Disk and TIRF Microscopy
- Cytometry
- Genomics



SPECIFICATIONS¹

	OBIS Galaxy Laser Combiner
8 Input Fiber Connections ² (nm)	405 445 or 458 488 or 473 514 532 561 594 640
Power Throughput ³ (%) (when used with Coherent OBIS Galaxy Compatible Lasers) for 405 nm to 594 nm for 640 nm	>45, Typical >60 >55, Typical >70
Maximum Power Per Channel (mW)	120
Maximum Total Output Power (mW)	<500
RMS Noise (%) (20 Hz to 2 MHz)	<0.5
Peak-to-Peak Noise (%) (20 Hz to 20 kHz)	<2
Fiber Connector Type (Input Connectors)	FC form-factor, ultra-flat contact FC/UFC with extended-life interface, anti-reflection (AR) coated tip
Polarization Extinction Ratio Loss (%)	<50
Long-Term Power Throughput (%) (8 hours, ±3°C)	>95
Long-Term Power Throughput (%) (average)	≤2 over 1000 hours

OUTPUT FIBER

Fiber Connector Type ⁴ (distal end) FC/APC Optional FC/PC8	8° angled, with extended-life interface 8° angled, with extended-life interface
Fiber Cable Type	3 mm mono-coil
Fiber Cable Length (m) (minimum)	2
Fiber Numerical Aperture (NA) (1/e ²) FC/APC Optional FC/PC8	0.055 0.065
Mode Field Diameter (μm) (typical)	3
Spatial Mode	TEM ₀₀
M ² (Beam Quality) ⁵	≤1.1
Fiber Minimum Bend Radius	51 mm (2.0 in.)
Fiber Tensile Load (maximum)	1 kg (2.2 lbs.)

UTILITY AND ENVIRONMENTAL REQUIREMENTS

Dimensions	229 x 170 x 29 mm (9.0 x 6.7 x 1.1 in.)
Weight	1.4 kg (3 lbs.)
Shock Tolerance ⁶ (g) (11 ms)	30
Vibration ⁶ (g-RMS) (20 Hz to 2 kHz)	7.7
Ambient Temperature Operating Temperature Storage Temperature	10 to 50°C (50 to 122°F) ⁷ -20 to 60°C (-4 to 140°F)
Laser Safety Classification ⁸	CLASS 4

¹ System specifications measured at 25°C.

² All input channels require a ±1 nm center wavelength tolerance. Required wavelength tolerances specifically: 405 nm with 404 nm to 406 nm, 445 nm with 444 nm to 446 nm, 458 nm with 457 nm to 459 nm, 488 nm with 487 nm to 489 nm, 514 nm with 513 nm to 515 nm, 532 nm with 531 nm to 533 nm, 561 nm with 560.5 nm to 562.5 nm, 594 nm with 593 nm to 595 nm, 640 nm with 641 nm to 643 nm.

³ The OBIS Galaxy Beam Combiner as tested and certified will be >60% power transmission per wavelength as measured with production tooling fixtures.

⁴ Fiber connector output not compatible for patchcord-to-patchcord connection.

⁵ M² measured with ModeMaster with 90/10 Clip Levels.



⁶ Non-Operational with a before/after change of <10%.

⁷ OBIS LS laser with Operating Temperature of 15 to 40°C (59 to 104°F).

⁸ OBIS Galaxy is not a laser and therefore the Laser Safety Classification is determined by the end-user and application. Refer to CDRH 21 CFR 1040 subchapter J or IEC 60825-1.

MECHANICAL SPECIFICATIONS



OBIS Galaxy

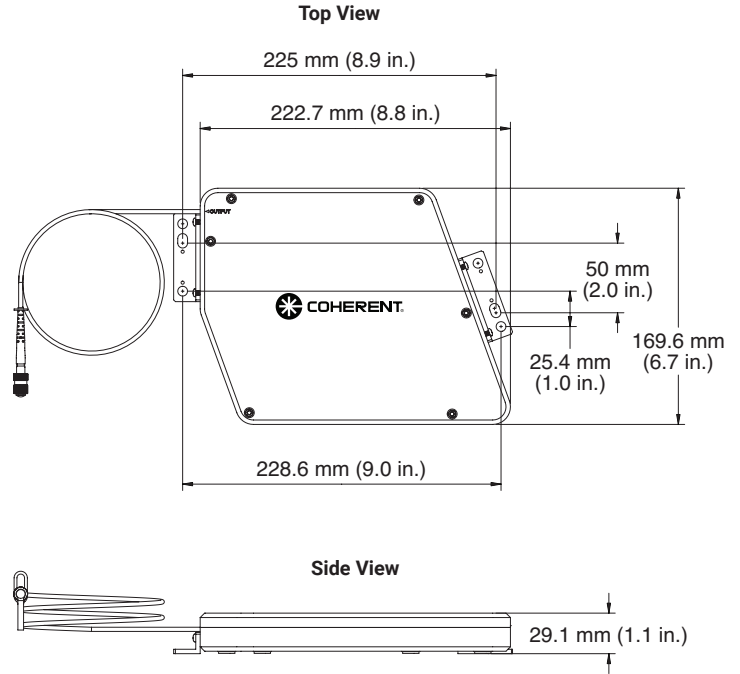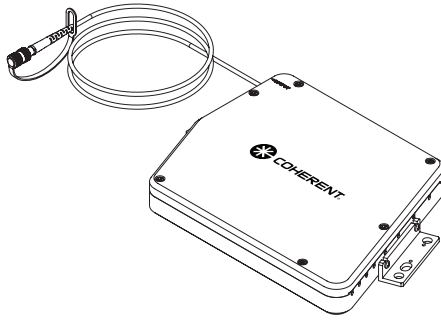

MECHANICAL SPECIFICATIONS

FC/APC



Distal End - Output

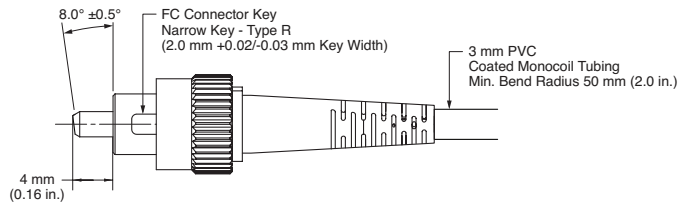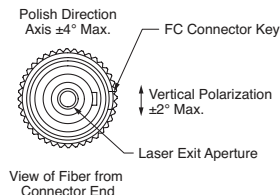

Optional FC/PC8



Angled Flat Connector

Distal End - Output

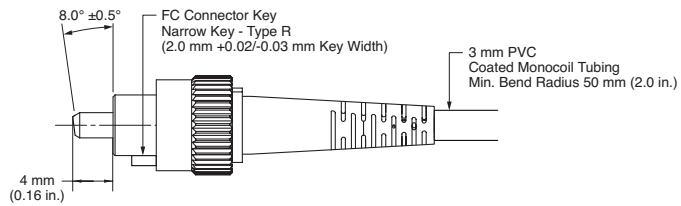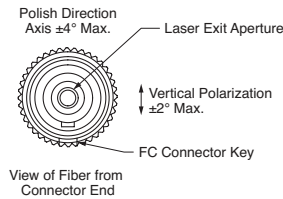

FC/UFC

Launch End - Input

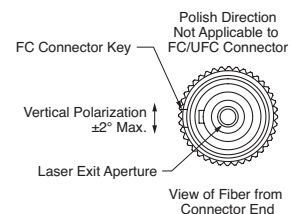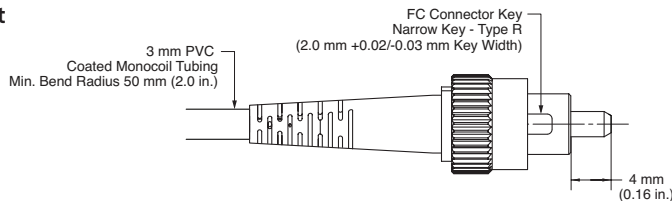

OBIS Galaxy Laser Combiner, Includes Output Fiber - Lasers sold separately	Part Number
8 Input FC/UFC, Single Output FC/APC, 405 nm, 458 nm, 488 nm, 514 nm, 532 nm, 561 nm, 594 nm, 640 nm	2261537
8 input FC/UFC, Single Output FC/PC8, 405 nm, 445 nm, 488 nm, 514 nm, 532 nm, 561 nm, 594 nm, 640 nm	1415671
8 input FC/UFC, Single Output FC/APC, 405 nm, 445 nm, 488 nm, 514 nm, 532 nm, 561 nm, 594 nm, 640 nm	1363484
8 input FC/UFC, Single Output FC/APC, 405 nm, 445 nm, 473 nm, 514 nm, 532 nm, 561 nm, 594 nm, 640 nm	1399474
OBIS FP LX Lasers ¹ for OBIS Galaxy	Part Number
OBIS 405 nm LX 50 mW Laser: Fiber Pigtail: UFC, Galaxy, 404 nm to 406 nm	1236438
OBIS 405 nm LX 100 mW Laser: Fiber Pigtail: UFC, Galaxy, 404 nm to 406 nm	1236439
OBIS 445 nm LX 45 mW Laser: Fiber Pigtail: UFC, Galaxy, 444 nm to 446 nm	1236441
OBIS 458 nm LX 45 mW Laser: Fiber Pigtail: UFC, Galaxy, 457 nm to 459 nm	1236442
OBIS 473 nm LX 50 mW Laser: Fiber Pigtail: UFC, Galaxy, 472 nm to 474 nm	1399476
OBIS 488 nm LX 30 mW Laser: Fiber Pigtail: UFC, Galaxy, 487 nm to 489 nm	1236443
OBIS 488 nm LX 100 mW Laser: Fiber Pigtail: UFC, Galaxy, 487 nm to 489 nm	1236444
OBIS 514 nm LX 50 mW Laser: Fiber Pigtail: UFC, Galaxy, 513 nm to 515 nm	1311150
OBIS 640 nm LX 75 mW Laser: Fiber Pigtail: UFC, Galaxy, 641 nm to 643 nm	1236445
OBIS FP LS Lasers ¹ for OBIS Galaxy	Part Number
OBIS 532 nm LS 80 mW Laser: Fiber Pigtail: UFC, Galaxy, 531 nm to 533 nm	1276599
OBIS 552 nm LS 80 mW Laser: Fiber Pigtail: UFC, Galaxy, 551.5 nm to 553.5 nm	1275619
OBIS 561 nm LS 80 mW Laser: Fiber Pigtail: UFC, Galaxy, 560.5 nm to 562.5 nm	1275608
OBIS 594 nm LS 60 mW Laser: Fiber Pigtailed: UFC, Galaxy, 592 nm to 594 nm	1363485

¹ All OBIS Galaxy FP lasers same as standard OBIS FP lasers with the exception of ± 1 nm center wavelength tolerances and an ultra-flat contact FC/UFC termination with extended-life interface, anti-reflection (AR) coating on fiber tip.

NOTE: OBIS Galaxy Lasers include: laser and mounting hardware. The following needs to be ordered separately: OBIS LaserBox (part numbers 1228877 or 1343229), OBIS Remote (part number 1214875), or OBIS Heat Sink (part number 1193289). See OBIS LX/LS Family datasheet for details.



Coherent, Inc.,
 5100 Patrick Henry Drive Santa Clara, CA 95054
 p. (800) 527-3786 | (408) 764-4983
 f. (408) 764-4646

tech.sales@coherent.com www.coherent.com

Coherent follows a policy of continuous product improvement. Specifications are subject to change without notice. Coherent's scientific and industrial lasers are certified to comply with the Federal Regulations (21 CFR Subchapter J) as administered by the Center for Devices and Radiological Health on all systems ordered for shipment after August 2, 1976.

Coherent offers a limited warranty for all OBIS Galaxy Laser Combiners. For full details of this warranty coverage, please refer to the Service section at www.Coherent.com or contact your local Sales or Service Representative.

MC-008-12-0M0122Rev.M Copyright ©2022 Coherent, Inc.

