

1490002010

ITSV-2

Powerful Desktop Video Phone with 5" capacitive touch screen and support for 720p HD video.



IC-EDGE IC-Edge



SIP



Video Intercom



ICX-AlphaCom



Bluetooth

Audio



HD Voice

Video



H.264

- Video desktop intercom station supporting ICX-AlphaCom, SIP and IC-EDGE solutions
- 4-core 1.3GHz ARM Cortex A53 processor with 2GB RAM and 8GB eMMC Flash
- Runs on Android 7.0 operating system
- 5.0" (1280×720) capacitive 5-point touch screen HD TFT LCD
- Built-in Bluetooth for syncing with mobile devices and connecting Bluetooth headsets
- Integrated dualband WiFi (2.4GHz & 5GHz)
- Built-in PoE/PoE+ to power the device and give it a network connection
- Built-in 1 mega-pixel CMOS tiltable camera for video calling with privacy wheel
- 6-way audio conferencing & 3-way 720p 30fps HD video conferencing capability
- Dual-mic HD speakerphone with noise reduction, advanced echo cancellation & excellent doubletalk performance
- Dual-switched auto-sensing 10/100/1000Mbps network ports
- Supports up to 16 SIP accounts

DESCRIPTION

The ITSV-2 is a powerful desktop video phone featuring Android 7.0, a 5" capacitive touch screen, tiltable camera, HDMI output, dual microphones and support for 720p HD video. The ITSV-2 delivers advanced SIP telephony features and out-of-the-box integration with our IC-EDGE and ICX-AlphaCom IP intercom platforms.

Package contents: ITSV-2 unit, handset with cord, base stand, universal power supply, network cable, screen cleaning cloth, quick installation guide.


- [Go to Zenitel Wiki for more information](#)

SPECIFICATIONS

SPECIFICATIONS

Graphic Display	5.0 inch 1280×720 capacitive touch screen (5 points) HD TFT LCD
Camera	Built-in 1 mega-pixel CMOS tiltable camera with privacy wheel, 720p 30fps
Auxiliary Ports	RJ9 headset jack (allowing EHS with Plantronics headsets), extension module port, USB port, HDMI-out (1.4 up to 720p30fps)
Feature keys	11 functions keys for CONFERENCE, TRANSFER, SEND/REDIAL, MUTE, EARPHONE, SPEAKERPHONE, VOLUME - /+. 3 dedicated Android keys for HOME, MENU, and BACK
Video Codec	H.263, H.264 BP/MP/HP
Video resolution	Up to 720p
Video frame rate	Up to 30 fps
Operating temperature range	0°C to +40°C
Storage temperature range	-10°C to +60°C
Relative humidity	10% - 90% non-condensing
Power options	Power over Ethernet (PoE & PoE+) or power adapter.
Power over Ethernet	802.3af Class 3, 802.3at Class 4
Power adapter	Input: 100-240VAC 50-60Hz; Output 12VDC 1.5A
Network Interface	2 x RJ45 (Ethernet) 10/100/1000 Mbps with integrated PoE
Bluetooth	Integrated, Bluetooth 4.2 + EDR
Wi-Fi	Integrated, dual-band 2.4 & 5GHz with 802.11 a/b/g/n
Security	User and administrator level passwords, MD5 and MD5-sess based authentication, 256bit AES encrypted configuration file, TLS, SRTP, HTTPS, 802.1x media access control
Protocols/Standards	SIP RFC3261, TCP/IP/UDP, RTP/RTCP, HTTP/HTTPS, ARP, ICMP, DNS (A record, SRV, NAPTR), DHCP, PPPoE, SSH, TFTP, NTP, STUN, SIMPLE, LLDP-MED, LDAP, TR-069, 802.1x, TLS, SRTP, IPv6, OpenVPN®
Audio technology	Wide-band Opus, wide-band G.722, G.711μ/a, G.729A/B, G.726-32, iLBC, in-band and out-ofband DTMF (In audio, RFC2833, SIP INFO), VAD, CNG, AEC, PLC, AJB, AGC, ANS
Language support	English, German, Italian, French, Spanish, Portuguese, Russian, Croatian, Chinese, Korean and Japanese
Compliance	FCC: Part 15 Class B; Part 15 Subpart C(15.247); Part 15 Subpart E(15.407); Part 68 HAC IC: RSS-247; RSS-Gen; RSS-102; IECS-003; CS03 CE: EN 55032; EN 55035; EN 61000-3-2; EN 61000-3-3; EN 62368-1; EN 301 489-1; EN 301 489-17; EN 300 328; EN 301 893; EN 62311 RCM: AS/NZS CISPR 32; AS/NZS 4268; AS/NZS 62368.1; AS/CA S004
Dimensions (HxWxD)	68.7 x 243 x 210 mm
Weight	1 kg

TECHNICAL DIMENSIONS

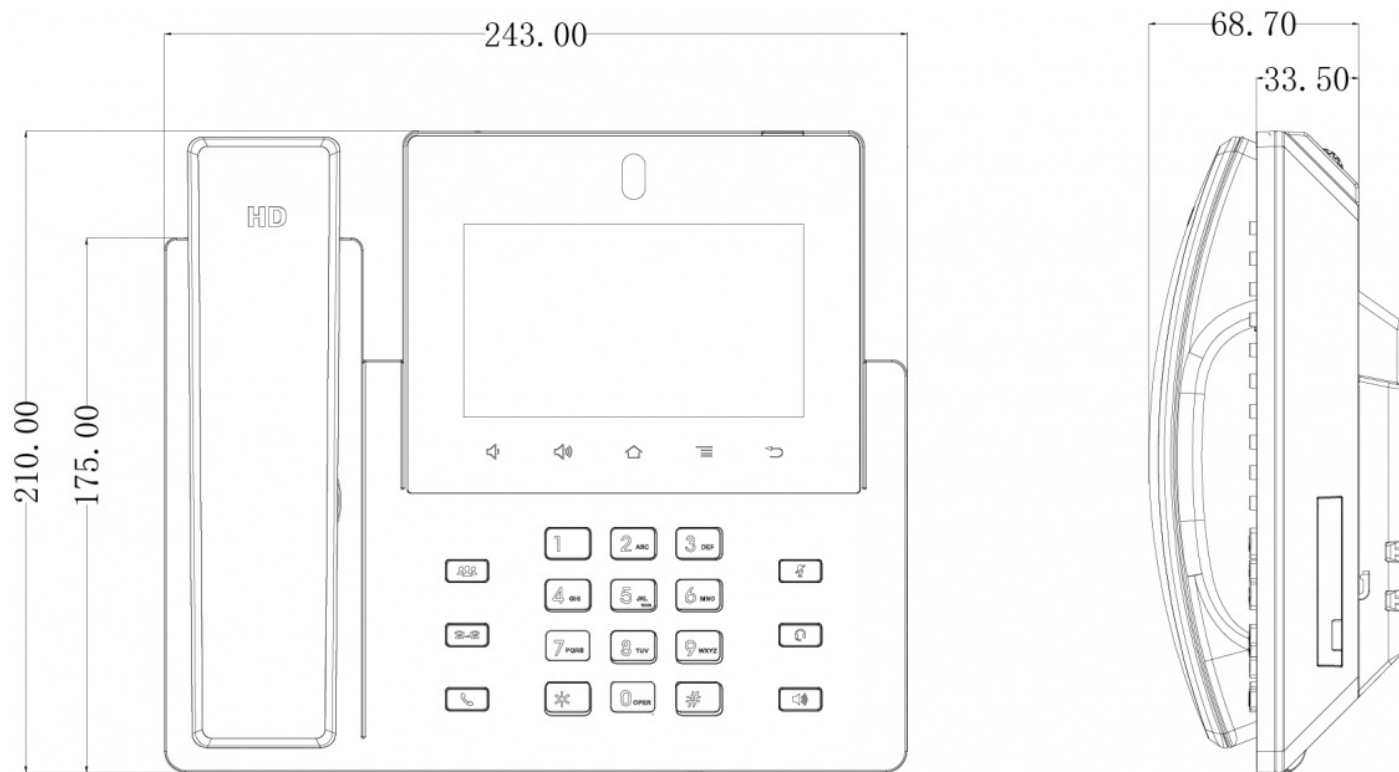

All dimensions in mm

ACCESSORIES



WALL-MOUNT BRACKET FOR ITSV-2

Item number: 1490009004

USED WITH

1008315020

TCIV-2+

IP and SIP Video Intercom



1008315030

TCIV-3+

IP and SIP Video Intercom



1008315050

TCIV-5+

IP and SIP Video Intercom



1008315060

TCIV-6+

IP and SIP Video Intercom



1008331010

TKIV+

Turbine Video & VoIP Intercom Module

