

AHD-ACP

Anchor Control Panel for Operation of 1 Windlass



- **Compact design for installation in control stands, panels, switchboards or switchboxes**
- **Degree of protection IP 66 (front side) for in and outdoor installation**
- **Illuminated push buttons for up/down control incl. ready-for-operation indication**
- **Automatic LED dimming and night operation design**

The anchor control panel for operation of one windlass AHD-ACP offers convenient and individual up/down control of one windlass. Kept in the Böning Yacht design the front corresponds to the other Böning operating panels and therefore contributes to a harmonious appearance on the bridge.

The operating panel provides two relay outputs for the control of the windlass, switching 24 V DC / max. 1 A each.


Controlling the anchor windlass from different stations on the vessel is also possible as several units can be connected by CAN.

For good visibility even at night the button LEDs are automatically dimmed. The design for night operation is glare-free and contributes to the safety on the bridge and the control platforms. The anchor windlass is directly controlled by function keys for up / down control integrated in the front of the panel.


For controlling two anchor windlasses with one device the operating panel AHD-DACP is available.

Dimensions

Front view


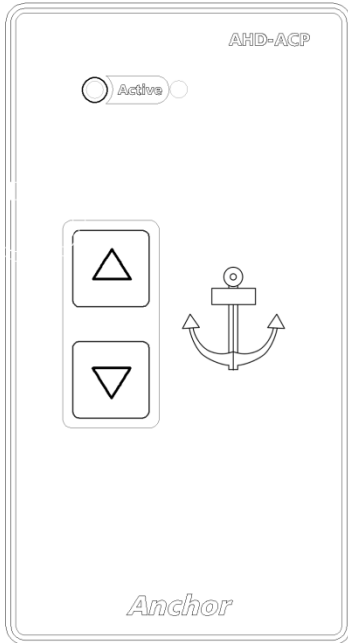


Rear view

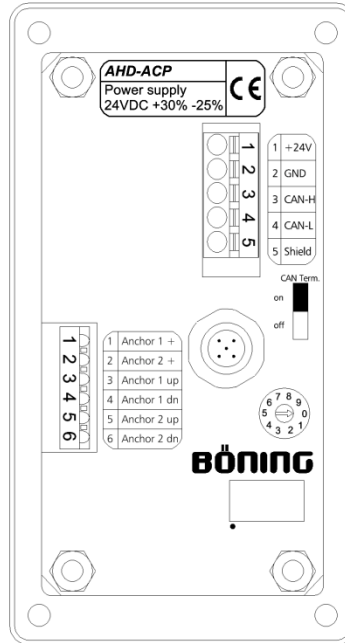

Einbautiefe:
Installation depth:
min. 100mm

Windlass Control

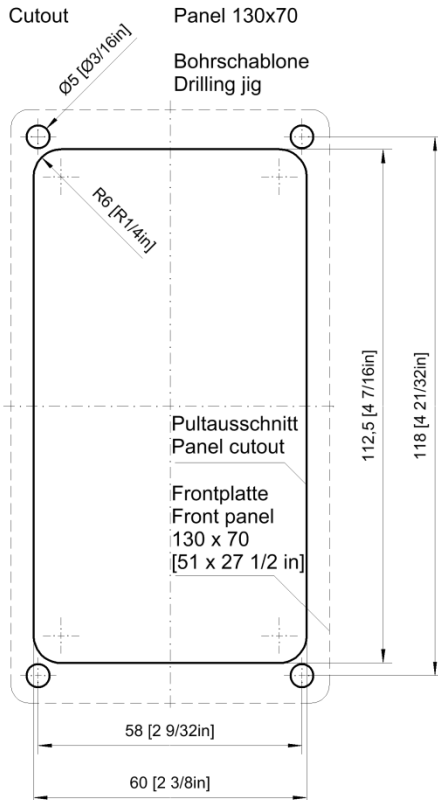

Technical Data

Power supply	24 V DC (+30%/-25%)
Current consumption (max.)	40 mA (24 V DC)
Weight	ca. 0.3 kg
Operating temperature	-30°C ... +70°C
Storage temperature	-50°C ... +85°C
Dimensions W x H x D	70 x 130 x 65 mm
Panel cutout	60 mm x 113 mm
Required installation depth	min. 100 mm
Protection class	IP 66 (front); IP 10 (rear)
Interfaces	1 x CAN
Inputs	Power supply (24 V DC) Device
Outputs	Control output (24 V DC) Anchor windlass 2 x Relay output (max. 1 A at 24 V DC)