

# CHEETAH

## RUGGEDIZED CAMERA SERIES

Front View

Rear View

# P67-C1911

## CMOS 2.86 MP

*GigE Vision® with Power over Ethernet (PoE)*

### Imperx: C1911

The P67-C1911 provides the same robust camera design as the POE-C1911 with an IP67 enclosure. The P67-C1911 camera features the Sony Pregius IMX429 Global Shutter CMOS sensor with a native resolution of 1944 x 1472 in a 2/3" optical format delivering up to 40 frames per second with GigE Vision®, Power over Ethernet (PoE)® output. Imperx puts you in control by providing the user the ability to set the camera up very easily. Using the simple GenCam™ compliant user interface, you can quickly apply image corrections to enhance recognition or quality. The C1911's flexibility, outstanding sensitivity, image quality, and speed make it suitable for a broad range of diverse and demanding applications. By combining the powerful Imperx camera control with an IP67 rated enclosure protecting the camera from dust, water and other contaminants, the P67-C1911 can be utilized in harsh environments.

### Specifications

Feature	Description	Feature	Description
Output Interface	GigE Vision® with Power over Ethernet (PoE)	Strobe Output	2 strobes, programmable position and duration
Resolution	1944 (H) x 1472 (V)	Pulse Generator	Yes, programmable
Sensor	Sony Pregius IMX429 CMOS Color/Mono	Data Correction	2 LUTs pre-programmed with Gamma 0.45, 2 LUTs pre-programmed with Negative LUT
Sensor Format	8.7 mm (H) x 6.6 mm (V), 2/3" optical format, 11.0 mm diagonal		Bad pixel correction (static, dynamic)
Pixel Size	4.5 microns square	Lens Mount	C-Mount
Shutter	Global shutter (GS)	Supply Voltage Range	12 V DC (6 V-30 V), 1.5 A inrush @ 12 V PoE (IEEE 802.3af / IEEE 802.3at)
Sensor Digitization	12-bit	Power Consumption	Typical: 3.84 W @ 12 V; PoE: 5 W
Frame Rate	40 fps (8-bit), 20 fps (10-bit/12-bit unpacked), 26 fps (10-bit/12-bit packed)	Camera Current	Typical: 320 mA @ 12 V
Dynamic Range	77 dB	Size - Width/Height/Length	48.5 mm (W) x 42.0 mm (H) x 61 mm (L) (without lens tube and connectors)
Output Bit Depth	8, 10, 12-bit	Lens Tube Dimensions	44 mm Lens tube: -Inner diameter 44 mm -Outer diameter 50 mm -Length varies (see IP67 lens tubes spec sheet)
Analog/Digital Gain	Manual, Auto; 0 dB – 48 dB, 480 steps		64 mm Lens tube: -Inner diameter 64 mm -Outer diameter 70 mm -Length varies (see IP67 lens tubes spec sheet)
Digital Gain	1x (0 dB) to 4x (12 dB) with a precision of 0.001x	Weight	196 g (without a lens tube)
Black Level Offset	Manual (0 – 255), Auto	Vibration, Shock	20G (20 – 200 Hz XYZ) / 100G
White Balance	Manual, Auto, Once, Off	Environmental	-30 °C to +75 °C Operating (-40 °C to +85 °C tested), -40 °C to +85 °C Storage
Shutter Speed	1 µs/step, 5 µs to 16 s	Humidity	10% to 90% non-condensing
Exposure Control	Off, Manual, Auto, External	MTBF	TBD
Regions of Interest (ROI)	2 ROI	Military Standard	MIL-STD-810G
Binning	1x2, 2x1, 2x2 (Mono cameras only)	Regulatory	FCC Part 15 Class A, CE, RoHs
Sub-sampling	1x2, 2x1, 2x2		
Trigger Inputs	External, Pulse generator, Software		
Trigger Options	Edge, Pulse width, Trigger filter, Trigger delay, Debounce		
Trigger Modes	Free run, Standard, Fast		
External Inputs/Outputs	1 IN (OPTO) / 2 OUT (OPTO, TTL)		

## Imperx: C1911 Applications


The P67-C1911 incorporates a number of unique features tailored to reduce system complexity, maximize interface bandwidth, and expand the usable operational range.

Aerospace • Satellites • Surveillance • Ball Grid Array • Printed Circuit Board Inspection • Motion Analysis • Broadcast Television • Telepresence • Unmanned Aerial Vehicles • Machine Vision • Intelligent Traffic Systems • Aerial Imaging • Open Road Tolling Systems • Situational Awareness

## Absolute Quantum Efficiency


Color Spectral Response

Sony IMX429

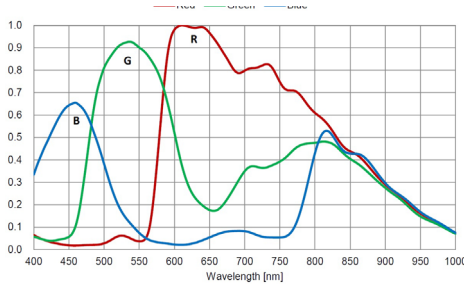


Mono Spectral Response




Sony IMX429

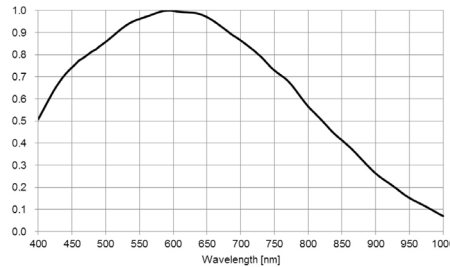

## Gen<I>Cam Compliant Camera Configurator

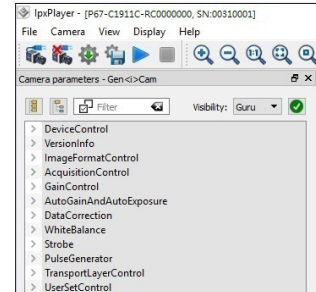

## Dimensions

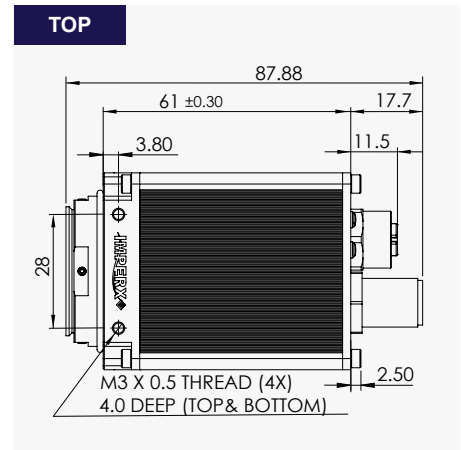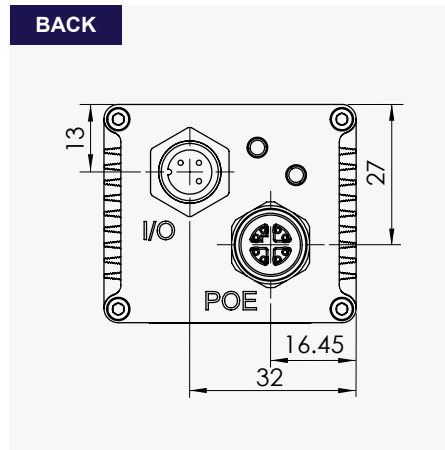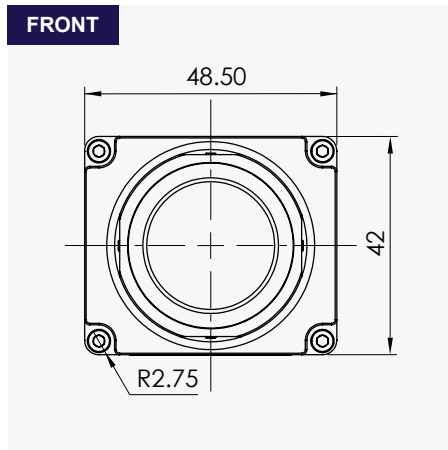

## Ordering Information

Please specify the camera model code and select an IP67 lens tube (see IP67 lens tubes spec sheet).

<b>Output Interface</b>
GiGE Vision® with Power over Ethernet (PoE)® in IP67 enclosure (P67)
<b>Sensor Types available</b>
Monochrome
Bayer Color
<b>Lens Mounts</b>
C-Mount

<b>Accessories (Sold separately)</b>
CBL-IO08-0001 – Cable, 8 pin I/O, BULGIN CONN to Pigtail, 2 m
CBL-XRJ45-0002 – Cable, RJ45 to 8 position M12/Xcode (IP67 METZ CONN), 2 m
CBL-XRJ45-0003 – Cable, RJ45 to 8 position M12/Xcode (IP67 METZ CONN), 3 m
CBL-XRJ45-0005 – Cable, RJ45 to 8 position M12/Xcode (IP67 METZ CONN), 5 m
CBL-XRJ45-0010 – Cable, RJ45 to 8 position M12/Xcode (IP67 METZ CONN), 10 m
CBL-XRJ45-0015 – Cable, RJ45 to 8 position M12/Xcode (IP67 METZ CONN), 15 m
CBL-XRJ45-0020 – Cable, RJ45 to 8 position M12/Xcode (IP67 METZ CONN), 20 m

## Connectors

**Power and I/O Interface**

- Reserved
- +12 VDC
- IN1 (OPTO)
- IN1/OUT1 RETURN
- OUT2 RETURN
- OUT1 (OPTO)
- +12 VDC RETURN
- OUT2 (TTL)

Connector: BULGIN PXMBN12RPM08APCM12

**1000BASE-T Ethernet Interface**

**Cable Wires:**

- TD0+ White/Orange
- TD0- Orange
- TD1+ White/Green
- TD1- Green
- TD3+ White/Brown
- TD3- Brown
- TD2- White/Blue
- TD2+ Blue

Connector: MACOM MMT361A315



IMPERX 6421 Congress Ave., Boca Raton, FL 33487, USA  
Tel: +1-561-989-0006. Email: sales@imperx.com

Rev: p67\_c1911\_r3\_2020

Quality Management System ISO 9001:2015 Registered  
Environmental Management System ISO 14001:2015 Registered  
DDTC Registered (Directorate of Defense Trade Controls, US Department of State)

WWW.IMPERX.COM

Technical data has been fully checked, but accuracy of printed matter is not guaranteed. Subject to change without notice. Copyright 2020.