



PBT Series Battery and Electrical System Testers and Analyzers


AFFORDABLE ACCURACY

The PBT Series of analyzers makes the leading battery and electrical system analysis technology affordable. Now, every technician can experience the advantages of conductance testing with a fast, simple and portable system that improves safety, productivity and accuracy.

Using either model of the PBT Series analyzers, a technician can accurately and quickly test batteries, even when discharged. The portable units are activated by simply connecting the clamps to the battery, and test by setting the rating and pressing the test button. In seconds, an accurate test decision is achieved and displayed as an easy to understand red, yellow or green LED result.

With models covering vehicle categories from recreational and motorcycle through family transports, a wide range of vehicle testing can be easily afforded.

The PBT-50 is specifically designed for motorcycle and other powersports applications.

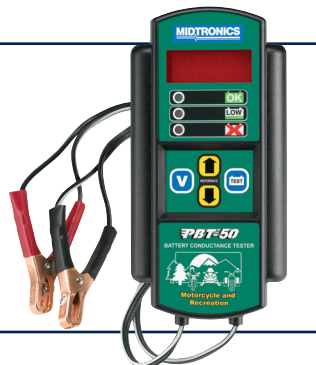

FEATURES

PBT-50



Powersports Battery Tester

- Accurate battery test decision in seconds
- Simple, reference number based testing
- Tests discharged batteries
- Voltmeter mode for testing both the starter and the charging system

PBT-100



Advanced Battery Conductance Tester

- Measurement range from 200-850 CCA
- Accurate battery test decision in seconds
- No user interpretation required
- Voltmeter mode for testing both the starter and the charging system

PBT-200



Advanced Battery Conductance/Electrical System Tester

- All of the features of the PBT-100, plus:*
- Shows available power in CCA's at the end of each test
 - Bad cell detection
 - High/low voltage capture for improved starter and charging system testing

PBT-300



Diagnostic Battery Conductance/Electrical System Tester

- All of the features of the PBT-200, plus:*
- Expanded measurement range from 100-1400 CCA
 - Bad cell detection
 - High/low voltage capture for improved starter and charging system testing

Common Specifications:

Display

- 3 LEDs: green/yellow/red
- 3 Position LED screen

Warranty

- Standard Midtronics 1-year

Operating Temperature

- 0° F to 120° F (-18° C to 50° C)

Power Requirements

- Uses the power of the battery under test; minimum 8 volts required

Operating Temperature

- 0° F to 120° F (-18° C to 50° C)

Voltmeter Range

- 8.0 - 19.0 VDC

Housing Material

- Acid-resistant ABS plastic

Housing Dimension

- 75 in x 3.5 in x 2.0 in (230mm x 102mm x 65mm)

Housing Weight

- 16 oz (427 g)

Corporate Headquarters

Willowbrook, IL USA
 Phone: 1.630.323.2800
 Toll Free in the US: 1.800.776.1995
 Toll-Free in Canada: 1.866.592-8053

European Sales

Midtronics b.v.
 European Headquarters
 Houten, The Netherlands
 Phone: +31 306 868 150

Midtronics China Office

China Operations
 Shenzhen, China
 Phone: +86 755 8202 2036

Asia/Pacific (excluding China)

Contact Corporate Headquarters
 Phone: +1.630.323.2800