

## PQube® 3r Power Analyzer



### Overview

The PQube 3r Power Analyzer is the best choice for protecting sensitive processes that need accurate detection of power disturbances and flexible alarm programming. PQube 3r Power Analyzer has 4 built-in programmable relay outputs that can be individually assigned to a specific trigger condition associated to the type or severity of disturbance.


PQube 3r Power Analyzer boast an impressive number of standard features including 8 energy metering channels, 4-quadrant ANSI Class 0.2 revenue-grade metering, alarms, and push reporting.

PQube 3r Power Analyzer auto-detects the mains frequency, wiring configuration and nominal voltage and is easy to install.

### Features

- Connects directly to voltages up to 690 V
- Certified for Class A power quality as per IEC 61000-4-30 Ed3
- Monitors DC power and process parameters with four additional AC/DC analog channels
- Detects and records high-frequency impulses at 4 MHz
- Measures in real time and records 2 kHz - 150 kHz emissions
- No software to install, built-in web and email server
- 32 GB of internal flash memory, holds years of data

### Results

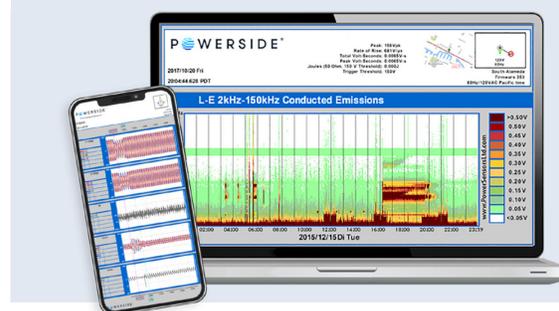

- Real-time readings via protocols  
Modbus/TCP, SNMP, BACnet, DNP3.0
- Event recordings and graphs  
Text, CSV, GIF, and IEEE 1159-3 PQDIF
- Daily, weekly, monthly, trends and graphs  
Text, CSV, GIF, and IEEE 1159-3 PQDIF

# Technical Specifications

TECHNICAL SPECIFICATIONS	
<b>Dimensions (L x W x H)</b>	4.33 in X 2.89 in X 3.08 in (11.0 cm X 7.34 cm X 7.82 cm), 1.8 in (3.5 cm) DIN rail mountable
<b>Weight</b>	10.5 oz (300g)
<b>Operating Environment (Temp., Hum., Alt.)</b>	-4 to 149° F (-20 to 65° C), 131° F (55° C) with PM2 AUX load, 5 - 95% RH (inside use), <2000 m above sea level (for EMC immunity, overvoltage, and other conditions, see full specs)
<b>Power Supply (AC)</b>	24 VAC ±10% at 50/60/400 Hz, 1.5A max (Powerside's PM1 and PM2 modules supply PQube 3 Power Analyzer compatible power at 100 to 240 VAC 50/60 Hz, and 120 to 370 VDC)
<b>Power Supply (DC)</b>	±24 to 48 VDC ±10% (polarity independent), 1A max. Power over Ethernet (PoE) compatible
<b>Internal Memory</b>	32 GB (holds over a year of data, depending on number of recorded events)
<b>Data Backup</b>	External microSD Card (not included) or USB 2.0 thumb drive
<b>Clock Synchronization</b>	SNTP, NTP
<b>Output File Types</b>	Text, GIF, CSV, and IEEE 1159-3 PQDIF
<b>Communication Ports</b>	Ethernet RJ45 10/100 (optional external wireless or cell modem)
<b>Communication Protocols</b>	Modbus/TCP, DNP 3.0, SNMP with traps, BACnet, FTP or HTTP (secure FTPS and HTTPS), and email

## Measurement Functions

VOLTAGE	
Sampling rate	512 samples per cycle at 50 Hz / 60 Hz (applies to voltage, current, and analog channels)
Number of Inputs	4 + Reference to earth (L1, L2, L3, N, E)
Range	0 - 750 VAC (L-N), 0 - 1300 VAC (L-L), impedance: 4.8MΩ
Voltage Magnitude*	L-L, L-N, L-E, and N-E. RMS over 1/2 cycle (Urms 1/2)
Frequency*	50 Hz, 60 Hz, 400 Hz, or 16.67 Hz
Unbalance (negative and zero sequence)*	IEC, GB, and ANSI methods
Flicker (Pinst, Pst, and Plt)*	IEC 61000-4-15
Voltage Harmonic & Interharmonic*	Volt or %H1, IEC 61000-4-7 Class 1, order up to 50th
Total Harmonic Distortion (THD)	%, IEC 61000-4-7
High Frequency Impulse (voltage)	Records transient pulses on one channel (L1-E, L2-E, L3-E, or N-E) at 4 MHz sampling, or all 4 channels at 1 MHz, range: ± 6 kV
Conducted Emissions (2 - 9 kHz)*	Volts for L1-E, L2-E, L3-E : resolution 200 Hz bins, range 0 to 60 Vpk
Conducted Emissions (8 - 150 kHz)*	Volts for L1-E, L2-E, L3-E, and N-E: resolution 2000 Hz bins, range 0 - 60 Vpk



CURRENT	
Number of Inputs	8 inputs, differential. I1 - I8, I9 - I14 Range: 0.333Vrms, 10Vpk, 0 - 6000 Amp with CTs, impedance: 33.3 k $\Omega$
Current Magnitude*	RMS refreshed 1/2 cycle (I <sub>rms</sub> 1/2)
Peak Current	RMS over 1 sec, 1 min, or user defined (3 min to 1 hr)
Unbalance (negative and zero sequence)*	IEC, GB, and ANSI methods
Current Harmonics & Interharmonics*	Amp, order up to 50th
Total Demand Distortion (TDD) or	Amp, IEC 61000-4-7
Total Harmonic Demand Distortion (THDI)	%, IEC 61000-4-7

POWER	
Number of Channels	8 calculated channels. I1 to I8, I9 to I14, calculated with either L1-N, L2-N, or L3-N voltages
Total Power	Up to two 3-phase loads
Peak Power	Intervals: 1 sec, 1 min, or user defined (up to one hour)
Reactive Power	VAR (per-phase and total)
Apparent Power	VA (per-phase, peak, and total)
Power Factor	TPF or DPF method (per-phase and total)

ENERGY	
Number of Channels	8 channels. I1 to I8, I9 to I14 calculated with either L1-N, L2-N, or L3-N voltages
Energy (Import, Export, & Net)	kWh (per-phase and total) Accuracy certified C.12.20 Class 0.2 and IEC 62053-22 Class 0,25
Reactive Energy (Import, Export, And Net)	kVARh (per-phase and total)
Apparent Energy	kVAh (per-phase and total)



ANALOG	
Number Of Inputs	4 single ended or 2 differential (A1, A2, A3, A4, E). Range: Low: $\pm 10$ VDC, High: $\pm 100$ VDC
Analog Magnitude	AN1-E, AN2-E, AN3-E, AN4-E or differential AN1-AN2, AN3-AN4 RMS refreshed 1/2 cycle
Power & Energy Configuration (Optional)	Power and energy meter 1 (AN1 X AN2), power and energy meter 2 (AN3 X AN4)

DIGITAL	
Number of Inputs	1 differential input (D+, D-). Digital threshold 1.5 V $\pm$ 0.2 V typical

ENVIRONMENT SENSORS	
Number of Inputs	2 ENV2 probe inputs (USB2, USB3). Uses Powerside's ENV2 EnviroSensor probe
Temperature	-4 to 176° F (-20 to 80° C)
Humidity	0 to 100 % RH
Barometric Pressure	Resolution better than 0.001 hPa
Acceleration (x, y, and z)	(x, y, and z) $\pm 2$ , $\pm 4$ , or $\pm 8$ gravity ranges, trigger on shock/vibration, seismic, or tilt

RELAY		
OUTPUT RELAYS	Operate Time	<20ms
Main Relay [RLY1]	Terminals Rating Function	[RLY1] 2-pole terminal   Max 300 mA at 30VAC/VDC   Normally open contact (NO) when PQube 3r is not powered   Normally closed (NC) When PQube 3r is powered   Upon event triggering, the relay opens for 3 seconds or for the event duration (whichever is longer)
Additional Relays [RLY2, RLY3, RLY4]	Terminals Rating	[RLY2, RLY3, RLY4] each relay has a 3-pole terminal, comes with 3 pluggable screw connectos   2 Amps at 60VDC/30VAC
	Function	Each relay can be individually wired with Normally Open (NO) or Normally Closed (NC).

\* Meets or exceeds IEC 61000-4-30 Ed. 3 Class A

## Order Information

Part Number: PQube3-PQ-E06N-0000-XXXX

## Contact Us

### Canada

7850 Trans-Canada Highway  
Saint-Laurent (QC) H4T 1A5  
1 (877) 333-8392

### United States

980 Atlantic Ave  
Alameda, CA 94501  
1 (888) 736-4347

[sales@powerside.com](mailto:sales@powerside.com)  
[powerside.com](http://powerside.com)



Version 2 – 07/01/2021

**POWERSIDE**<sup>®</sup>

All our energy, in your power