


VP-4020S, 5030S, 6035S

VACUUM & PRESSURE TYPE

Flexible Port Locations



Dimensions

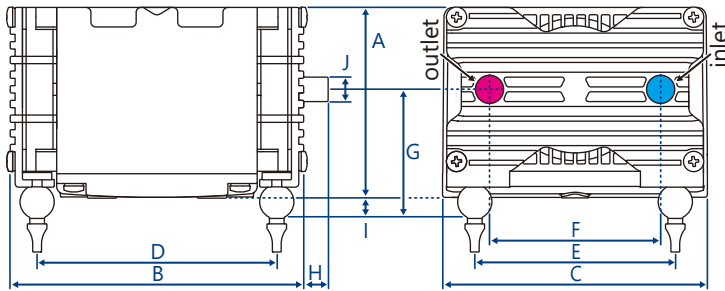

	A	B	C	D	E	F	G	H	I	J
mm	78	120	108.3	98	82	70	52	10	7.8	∅10
inch	3.07	4.72	4.26	3.86	3.23	2.76	2.05	0.39	0.3	0.39

*The figure represents the standard configuration. Customization of nozzle position is available.

Specifications

		VP-4020S		VP-5030S		VP-6035S	
Rated voltage	V	AC120	AC230	AC120	AC230	AC120	AC230
Power frequency	Hz	60	50	60	50	60	50
Max Airflow volume	L/min	47(-46); 47(-47)	58(-57); 56(-56)	66(-65); 63(-63)			
Max Power consumption	W	18	16	27	23	35	30
Sound level	dBA	34.5	31.5	38	35	40	36.5
Weight	kg	1.95					

*All characteristics values are only for reference, and are not guaranteed values.

*The value in parentheses represents VP vacuum.

*Sound data shown is with pump operating at 10 kPa and both inlet & exhaust plumbed away from the unit.

- Performance data is representative of typical values. Specifications and performance data are subject to change without notice. Purchaser is responsible for determining suitability for product applications
- "HIBLOW" is a registered mark of Techno Takatsuki co., Ltd.

Performance Curves

— 120V/60Hz — 230V/50Hz

