




LABORATORY FILTER PRESS

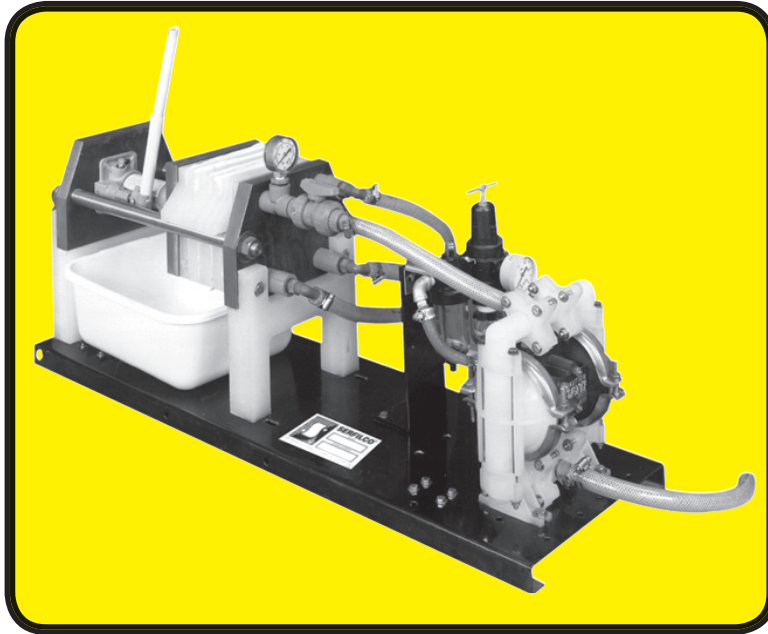

- **Lab Analysis**
- **Small Batch Production**
- **Field Testing**

- **PLATE AND FRAME DESIGN**
Dual capacity- Can be used with one or two frames for adjusted volume -
.01 cu. ft. (283 cm³) or .02 cu. ft. (566 cm³)
Area per frame - 17in² (110 cm²)
- **INCLUDES POLYPROPYLENE PLATES AND FILTER CLOTH**
Suitable for most waste solutions
- **AIR DIAPHRAGM PUMP**
Polypropylene construction
Flows adjustable to 5 GPM (15.7 LPM)
Pressure adjustable to 60 PSI
(4.22 kg/cm²)


The **Lab Filter Press** is designed for lab analysis and small batch production. This press is also very useful for testing for upscaling to full production-size semi-automatic or manually operated presses. Includes polypropylene plates, filter cloth, air diaphragm pump, pneumatic controls, pressure gauges, inlet

flow control valve, hoses, manual hydraulic pump and drip pan. Entire assembly is mounted on a vinyl coated steel base. Flow pattern is corner inlet with three individual corner discharge lines.

TO ORDER

LAB FILTER PRESS	PRICE CODE NO.
MODEL .02 - 7PPMH	43-0857
REPLACEMENT CLOTHS (Set of 4)	PRICE CODE NO.
SF - 7 x 7	43-0822

Dimensions: 42" (1.1m) L x 13" (.33m) W x 22" (.56m) H
Shipping Weight: 95 Lbs (43 kg.)
Maximum operating temperature: 150° F (66° C)

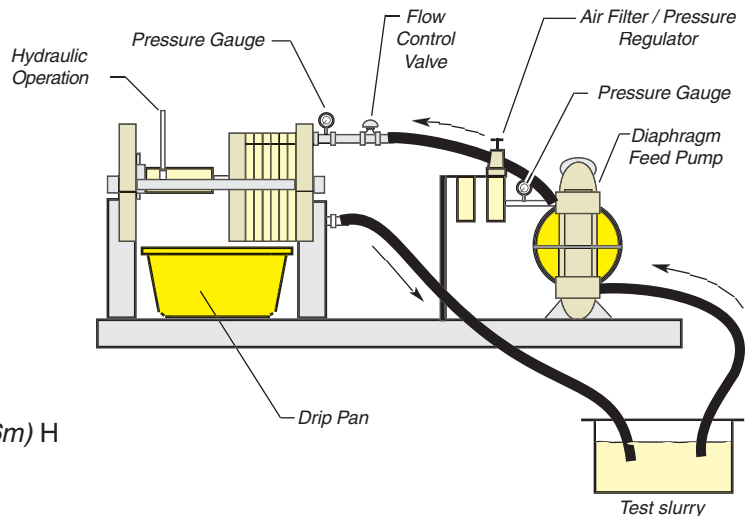

F.O.B. Northbrook, Illinois

Specifications subject to change without notice.

DISTRIBUTED BY



SERFILCO

2900 MacArthur Blvd. 847-509-2900
Northbrook, IL 60062-2005 U.S.A. 800-323-5431
e-mail: sales@serfilco.com FAX: 847-559-1995
www.serfilco.com



SERFILCO FILTRATION RANGE

Proudly Made in the USA, SERFILCO Offers the Widest Range of Filtration Systems Anywhere.



LABMASTER – 150 to 600 GPH, 1 x cartridge, mag-drive pump, PP/CPVC/PVDF.



SPACE-SAVER – 600 to 2,400 GPH, 3 x cartridge or filter bag, mag-drive pump, optional by-pass carbon PP/CPVC/PVDF.



SUPER SPACE-SAVER – 2,400 to 10,000 GPH, 6 or 15 cartridge, filter bag or disk filter, mag-drive or mechanical seal pump PP/CPVC/PVDF.



MEGAFLO – 8,000 to 18,000 GPH, 22 or 26 cartridge, mag-drive or mechanical seal pump, optional by-pass carbon PP/CPVC/PVC.



GUARDIAN – 12,000 GPH, cartridge, bag or disk filtration, mag-drive or mechanical seal pump, optional slurry tank and by-pass carbon PP/CPVC/PVDF/Steel.



OPTIFLO – 36,000 GPH, cartridge or disk filtration, mag-drive or mechanical seal pump, optional slurry and bypass carbon.



ADMIRAL – 6,800 GPH, in-tank or out-of-tank cartridge filtration, vertical seal-less pump, optional bypass carbon.



TITAN – 2,400 to 12,000 GPH, fully automatic operation, quartz or anthracite permanent media, horizontal sealed pump,