

Quick and clean type focusing on cleaning efficiency

NDL



East-to-clean design helps automate production lines for food or cosmetics where the equipments need cleaning on a daily basis.

Easy-to-clean design

No screws where exposed to fluid assures easy cleaning.

Reducing the maintenance time


Quick disassemble and cleaning enhances the operating efficiency.

Safety-oriented to give you peace of mind

Built of safe materials in compliance with standards such as Food Sanitation Law.



Type NDL dimensional outline drawing

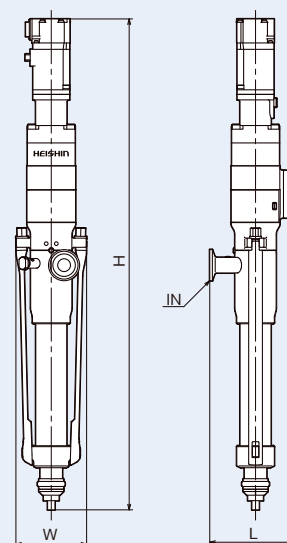

●Type NDL performance / dimension table

Type	Discharge rate (mL/s)	AC servomotor (W)	Discharge accuracy (mL)	H (mm)	W (mm)	L (mm)	IN (へル-ル)	Weight (kg)	Casing internal volume (mL)
3NDL04G15	0.03 ~ 0.5	50	±0.01	435	80	93	10A	3.1	66
3NDL06G15	0.1 ~ 2.0	50	±0.02	455	80	93	10A	3.1	66
3NDL08G15	0.2 ~ 4.0	100	±0.04	506	80	93	10A	3.5	71
3NDL10G15	0.4 ~ 9.0	100	±0.08	536	80	93	10A	3.7	71
2NDL15G15	1.8 ~ 37	200	±0.28	615	100	115	1 ^S	7.9	148
2NDL20G15	4.2 ~ 85	400	±0.64	679	100	115	1 ^S	8.9	148

*Rating and dimension above are shown as model cases.

*The specifications provided in this catalog are subject to change without prior notice.

*The discharge accuracy is a rough value to be measured when clear water is discharged at 0.5 - 5 rotation.