




SM15K - Series 15kW DC POWER SUPPLIES

Bi-Directional - Constant Power

Models	Voltage range	Current range
SM 70-CP-450	0 - 70 V	-450 - 450 A
SM 210-CP-150	0 - 210 V	-150 - 150 A
SM 500-CP-90	0 - 500 V	-90 - 90 A
SM 1500-CP-30	0 - 1500 V	-30 - 30 A



Features

- Bi-Directional power supply, standard 15kW Source & Sink
- Flexible output with constant power characteristic
- Power Regeneration Technology: sink power is not dissipated but fed back into the grid
- Designed for long life at continuous full power
- Excellent dynamic response to load changes, digital controlled with the possibility to adapt to the type of load
- Very low heat dissipation, efficiency 95% or more
- Protected against all overload and short circuit conditions

Functionalities

- Operation on a wide range of three phase AC input voltages
- Standard Ethernet & Web interface
- EMC surpasses CE requirements: low emission & high immunity
- Low audible noise: temperature controlled cooling fans
- Durable digital encoders for voltage & current adjustment and menu operation
- Large user display, menu driven operations

	SM70-CP-450	SM210-CP-150	SM500-CP-90	SM1500-CP-30
DC Power terminals				
voltage range current range	0 - 70 V -450 - 450 A	0 - 210 V -150 - 150 A	0 - 500 V -90 - 90 A	0 - 1500 V -30 - 30 A
Absolute maximum Sink voltage <i>Warning! Higher voltages will damage the unit!</i>	≤ 74 V	≤ 220 V	≤ 525 V	≤ 1575 V
Minimum Sink Voltage @ var. sink current: <i>Note that unit switches automatically between Source ↔ Sink.</i>	1.2 V @ -450 A 0.8 V @ -215 A 0.8 V @ -45 A	3.0 V @ -150 A 1.5 V @ -75 A 1.5 V @ -15 A	5.5 V @ -90 A 3.0 V @ -30 A 1.0 V @ -10 A	16.0 V @ -30 A 7.0 V @ -10 A 2.0 V @ -3 A
Minimum sink current			0.4%	
AC Input				
3 phase, 48 - 62 Hz rated voltage range rated frequency rated current			342 - 528 V 380 - 480 V 50 / 60 Hz maximum 27 A	
current (400 V / 3 ph, 15kW) power factor, 15kW, 7.5kW			23 A 0.996 / 0.988	
internal fuses standby input power ($V_o=I_o=0$) standby input power ($V_o=V_{max}$)			30 AT 96 W 180 W	
Efficiency (Sink & Source mode): 400 V AC, 3 ph input, 15 kW, $I_{out}=100\%$ 15 kW, $U_{out}=100\%$			95 % 96 %	
Regulation				
Load 0 - 100% Line 342 - 528 V AC (external voltage sense)	CV CV	6 mV < 1 mV	5 mV < 1 mV	4 mV < 1 mV
Load 0 - 100% Line 342 - 528 V AC (internal voltage sense, after warm up)	CC CC	35 mA 4 mA	12 mA 3 mA	8 mA 1 mA
Ripple + noise (CC-ripple at full load)				
Source mode: rms (BW=300 kHz) p-p (BW=20 MHz)	CV CV	33 V / 450 A 10 mV 60 mV	100 V / 150 A 30 mV 150 mV	167 V / 90 A 10 mV 55 mV
rms (BW=300 kHz) p-p (BW=20 MHz)	CC CC	100 mA -	t.b.d. -	45 mA 200 mA
Source mode: rms (BW=300 kHz) p-p (BW=20 MHz)	CV CV	70 V / 215 A 10 mV 60 mV	210 V / 71.5 A 20 mV 125 mV	500 V / 30 A 25mV 115mV
rms (BW=300 kHz) p-p (BW=20 MHz)	CC CC	100 mA -	t.b.d. -	45 mA 200 mA
Sink mode: rms (BW=300 kHz) p-p (BW=20 MHz)	CV CV	33 V / 450 A 8 mV 50 mV	100 V / 150 A 30 mV 150 mV	167 V / 90 A 7 mV 35 mV
rms (BW=300 kHz) p-p (BW=20 MHz)	CC CC	100 mA -	t.b.d. -	45 mA 200 mA
Sink mode: rms (BW=300 kHz) p-p (BW=20 MHz)	CV CV	70 V / 215 A 8 mV 50 mV	210 V / 71.5 A 20 mV 125 mV	500 V / 30 A 10 mV 50 mV
rms (BW=300 kHz) p-p (BW=20 MHz)	CC CC	100 mA -	t.b.d. -	90 mA 320 mA
Programming & monitoring				
accuracy (excluding INT MOD ANA)				
Voltage Current			± 0.08% ± 0.15%	
Temp. coeff., per °C	CV CC		20.10 ⁻⁶ 50.10 ⁻⁶	
Stability¹ after 1 hr warm-up, during 8 hrs	CV CC		50.10 ⁻⁶ 80.10 ⁻⁶	
$t_{amb} = 25 \pm 1^{\circ}\text{C}$, $V_{in} = 400 \text{ VAC}$ (internal voltage sensing for CC-stab.)				

Notes: 1. Measured at full load. 2. Signal latency depends on the interface used & data traffic. 3. See "Safety Instructions" 4. Typical.

Programming speed² Note: Values on resistive load , unit in CV-mode . With other load, or in CC-mode, values can be longer.	SM70-CP-450	SM210-CP-150	SM500-CP-90	SM1500-CP-30
Rise time (10 - 90%) output voltage step time, (load = 15 kW) time, (load = 1500 W)	0 → 33 V 2.2 ms 1.5 ms	0 → 100 V 1.6 ms 1.3 ms	0 → 167 V 1.5 ms 1 ms	0 → 500 V 1.5 ms 1 ms
output voltage step time, (load = 15 kW) time, (load = 1500 W)	0 → 70 V 5.5 ms 3.5 ms	0 → 210 V 3 ms 2.7 ms	0 → 500 V 4.5 ms 3.5 ms	0 → 1500 V 4.5 ms 3.5 ms
Fall time (90 - 10%) output voltage step time, (load = 15 kW) time, (load = 1500 W)	33 → 0 V 1.5 ms 1.5 ms	100 → 0 V 1.3 ms 1.3 ms	167 → 0 V 0.8 ms 0.9 ms	500 → 0 V 0.8 ms 0.9 ms
output voltage step time, (load = 15 kW) time, (load = 1500 W)	70 → 0 V 2.6 ms 3.5 ms	210 → 0 V 2.5 ms 2.5 ms	500 → 0 V 2.5 ms 3.5 ms	1500 → 0 V 2.8 ms 3.5 ms
DC Output Capacitance X-capacitors (typical) Y-capacitors (typical)	22000 µF 950 nF	1170 µF 950 nF	560 µF 145 nF	58 µF 145 nF

	SM70-CP-450	SM210-CP-150	SM500-CP-90	SM1500-CP-30
Recovery time output voltage recovery within di/dt of load step time, @ 50 - 100% load step max. deviation	33 V, 225 → 450 A 100 mV 5 A/µs 100 µs 0.8 V	100 V, 75 → 150 A 500 mV 2.4 A/µs 100 µs 1.4 V	167 V, 45 → 90 A 750 mV 0.8 A/µs 100 µs 2.8 V	500 V, 15 → 30 A 2.8 V 0.25 A/µs 100 µs 9.0 V
output voltage recovery within di/dt of load step time, @ 50 - 100% load step max. deviation	70 V, 112 → 215 A 100 mV 2 A/µs 100 µs 0.3 V	210V, 36 → 72 A 250 mV 1.15 A/µs 100 µs 0.75 V	500 V, 15 → 30 A 500 mV 0.25 A/µs 150 µs 1.2 V	1500 V, 5 → 10 A 1.2 V 0.085 A/µs 150 µs 3.5 V
Note: Values are with Local Sensing . With Remote Sensing + long cables, values can be different.				
Output impedance⁴ CV, 0-1 kHz CV, 1-100 kHz	< 0.75 mΩ < 40 mΩ	< 5 mΩ < 40 mΩ	< 16 mΩ < 160 mΩ	< 250 mΩ < 2 Ω
Pulsating load max. tolerable AC component of load current f > 1 kHz f < 1 kHz	60 Arms 450 Apeak	15 Arms 150 Apeak	15 Arms 90 Apeak	5 Arms 30 Apeak

Insulation AC power terminals / DC pwr terminals creepage / clearance AC power terminals / case DC power terminals / case	3750 Vrms (1 min.) 8 mm 2500 Vrms 1000 V DC ³	3750 Vrms (1 min.) 8 mm 2500 Vrms 1500 V DC ³
Safety	EN 60950 / EN 61010	
EMC Emission Immunity	EN 61326-1, class B equipment (for use in domestic establishments) EN 61326-1, equipment for use in industrial and domestic establishments	
Operating Temperature at full load	– 20 to + 50 °C derate output to 75% at 60 °C	
Humidity	maximum 95% RH, non condensing, up to 40 °C maximum 75% RH, non condensing, up to 50 °C	
Storage temperature	– 40 to + 85 °C	
Thermal protection	output shuts down in case of insufficient cooling	
MTBF	500 000 hrs	

	SM70-CP-450	SM210-CP-150	SM500-CP-90	SM1500-CP-30
Hold-Up time (@ 400 VAC input)				
V _{out} = 100%, P _{out} = 15 kW	10 ms	10 ms	15 ms	15 ms
I _{out} = 100%, P _{out} = 15 kW	10 ms	10 ms	15 ms	15 ms
V _{out} = 100%, P _{out} = 7.5 kW	25 ms	20 ms	35 ms	35 ms
Turn on delay after mains switch on			2.5 s	
Inrush current			23 A	

	SM70-CP-450	SM210-CP-150	SM500-CP-90	SM1500-CP-30
Series operation max. total voltage	Not possible	Not possible	750V* 1000V** maximum 6 units ³	Not possible
Master / Slave operation			 *) units delivered before Q4/2018 **) units delivered Q4 / 2018 or newer Contact factory for upgrading to enable 1000V series operation for older units.	
Parallel operation Master / Slave operation			maximum 60 units	
Remote sensing max. voltage drop per load lead			default 1 V, can be set to 10 V	
Limits	Voltage adjust range	0 - 101 %		
	Current adjust range	0 - 101 %		
	Power adjust range	0 - 101 %		
	Voltage OverLoad level	102.5 % - unit will continue to operate (OL-indication in display)		
	Voltage Self-Protection level	105 % - output is automatically disabled (PROT-indication in display)		
Potentiometers front panel control with knobs resolution			15 bits	
Meters	4 digit	4 digit	4 digit	4 digit
scale voltage	0.00 - 70.00 V	0.0 - 210.0 V	0.0 - 500.0 V	0 - 1500 V
scale current	-450.0 - 450.0 A	-150.0 - 150.0 A	-90.0 - 90.0 A	-30.00 - 30.00 A
scale power	-15000 - 15000 W	-15000 - 15000 W	-15000 - 15000 W	-15000 - 15000 W
accuracy read output	0.2% + 2 digit	0.2% + 2 digit	0.2% + 2 digit	0.2% + 2 digit

Mounting	stacking of units allowed, air flow is from left to right				
AC Terminals (CON A)	screw terminals for wire 4 mm ² , 3 phase + earth (no neutral)				
DC Terminals (CON B1 & B2)	M12 bolts	M8 bolts			
Programming connectors (LAN)	standard with RJ45-connector for Ethernet at rear panel, 100 Mb/s, full-duplex				
Interlock (CON F)	input for contact at rear panel				
Cooling audio noise level air flow	low noise blower, fan speed adapts to temperature of internal system ca. 50 dBA at full load, 25 °C ambient temperature, 1 m distance ca. 65 dBA at full load, 50 °C ambient temperature, 1 m distance From left to right				
Enclosure degree of protection	IP20				
Dimensions	132 x 483 mm (19", 3 U) 128 x 448 x 591 mm (excluding feet) no extra depth is required with optional interfaces assembled				
Weight	27 kg				

Notes: 1. Measured at full load. 2. Signal latency depends on the interface used & data traffic. 3. See "Safety Instructions" 4. Typical.

CV = Constant Voltage

CC = Constant Current


CP = Constant Power

Specifications measured at
 $t_{amb} = 25 \pm 5^{\circ}\text{C}$ and $V_{in} = 400 \text{ VAC}$,
50 Hz unless otherwise noted.

The information in this document is
subject to change without notice.

Notes:

1. Measured at full load.
2. Signal latency depends on the interface used and data traffic.
3. See safety Instructions in the operating manual.

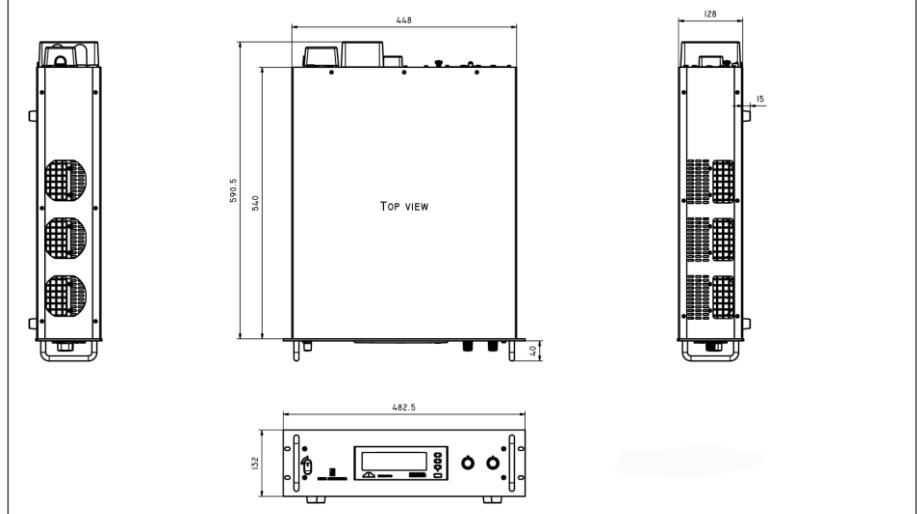

Dimensions

Typical Applications

- Solar inverter testing, PV-Simulation
- Car testing systems
- ATE in industrial production lines
- Plasma chambers
- Automotive battery simulations
- Controlled battery (dis)charging
- Lasers
- Sustainable energy
- Driving PWM-Controlled DC motors
- Accurate current sources
- Aerospace and military equipment

Standard Features



Bi-Directional Two-Quadrant Output

Full power Bi-Directional two quadrant operation maintains the DC output voltage constant whether the output power is positive or negative. Ideal for PWM-speed controlled DC-Motors and ATE systems.



Digital CV-, CC- and CP-Settings

Reliable, long-life digital encoders are implemented at the front panel. Includes total front panel lock (also for CV- / CC-knobs) and a coarse or fine pitch adjustment depending on the turning speed.



Sequencer

Arbitrary Waveform generator or standalone automation.



High Voltage Isolation

A high DC output isolation allows floating operation up to 1000 V for SM70-CP-450, SM210-CP-150 and SM500-CP-90, and up to 1500 V for SM1500-CP-30.



Ethernet Interface

Ethernet interface for programming and monitoring



USB-Input

Not yet available:
Front and rear panel USB-Input for exchange of settings and waveforms (Host / Type-A), or for controlling the unit (Device / Type-B).

Options



Software control and Interfaces

Field installable interfaces:

- Master / Slave controller
- Isolated Contacts
- Serial controller with multiple protocols:
RS 232, RS 485, RS 422 and USB (Device)
- Digital I/O
- Isolated Analog Programming

Order Codes :

- INT MOD M/S-2
- INT MOD CON
- INT MOD SER
- INT MOD DIG
- INT MOD ANA

