



Capacitive Evaluator Series KXA-eXtreme

Housing 120 x 120 x 60 mm


- KXA-...MINI for connection of 4 capacitive Sensors KXS-...-M5/... to -M16/...
- Extension by further switching points possible (master / slave function)



Technical data

Output function	4 x Antivalent
Type PNP	KXA-5-4MINI-XXL-P-A-1-KL-Y90
Art.-No.	XA 0026
Operating voltage (U_B)	18...36 V DC
Operating current max. (I_o)	0...250 mA each output
Permitted residual ripple max.	25 %
No-load current (I_o)	Typ. 120 mA
Permitted ambient temperature	-25...+55 °C
LED - display	Green / yellow
Protective circuit	Built-in
Degree of protection IEC 60529	IP 54
Norm	EN 60947-5-2
Connection	Screw terminals and triax socket
Housing material	ABS

All specifications are subject to change without notice. (01.07.2019)

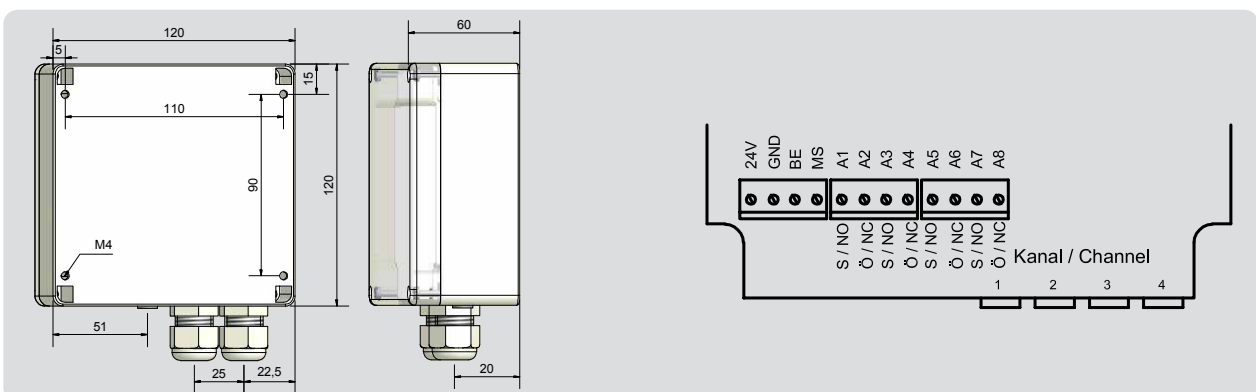

Made in Germany