

MP-25 Hydrophone



Higher Sensitivity and Greater Depth of Operation

- High output
- Acceleration noise canceling configuration
- Easy method to check polarity
- Full one-year warranty

MP-25 Hydrophone

The MP-25 is a high-output, pressure sensitive detector for use in swamps, rivers, bays, and transition zones.

The MP-25 is transformer-coupled, and has eight piezoelectric crystals connected in an acceleration-cancelling arrangement with each crystal operating in the high-sensitivity bender mode. The crystals and transformer are permanently molded in a durable polyurethane case. This sealed unit has a thermoplastic resin outer case with easy access ports for polarity testing. The Sidewinder version does not have the outer case.


The MP-25 Sidewinder version is designed for easy mounting to bay cable, and reduction of leader cable stress. Its tapered design positions the leader flush with the cable, thereby greatly reducing the friction in this area as the hydrophone travels through the squirter.

Anchor slots are provided for tie-wrapping the cable to the bay cable, thus facilitating the process of taping the unit to the cable.

DIMENSIONS	W/O OUTER CASE	W/ OUTER CASE	SIDEWINDER
Length	12.07 cm (4.75 in.)	13.97 cm (5.50 in.)	16.76 cm (6.60 in.)
Diameter	5.08 cm (2.00 in.)	6.10 cm (2.40 in.)	5.08 cm (2.00 in.)
Weight	236 g (0.52 lbs.)	349 g (0.77 lbs.)	263 g (0.58 lbs.)
PHYSICAL SPECIFICATIONS		MP-25-250	
Operating Temperature	0–35° C (32–95° F)		
Operational Depth	76.2 m (1–250 ft.) [§]		
ELECTRICAL SPECIFICATIONS		MP-25-250	
Natural Frequency	10 Hz *		
Voltage Sensitivity	11.2 Volts/bar		
Impedance	250 Ω		
DC Resistance	160 Ω		

[§] Other operational depths available.

* Other frequencies available.

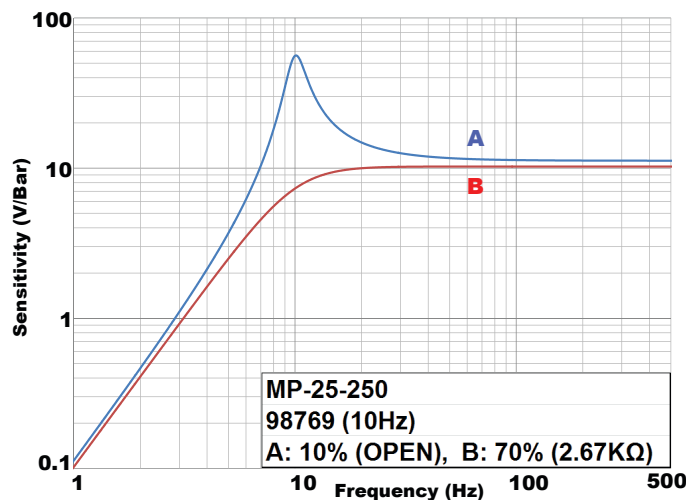

7007 Pinemont Drive • Houston, Texas 77040 USA
www.geospace.com • T: 713-986-4444 • F: 713-986-4445