

## Blade stand HSG-GMN-V-E-K

### Description:


Smallest blade stand with straight standard blade, suction, protective cover, foot control and heating transformer with temperature setting separately.

The cutting blade(s) is/are moved and guided pneumatically in the blade stand.

The material to be processed is placed under the cutting edge or the combination tool. The cutting process is triggered by hand or foot operation.

The material is pulled to the desired length by hand - measurement with measuring tape or adjustable end stop.

During the next cut, the first material section is processed at both ends and the start of the next section, i.e. a section is completely finished with each subsequent cycle.

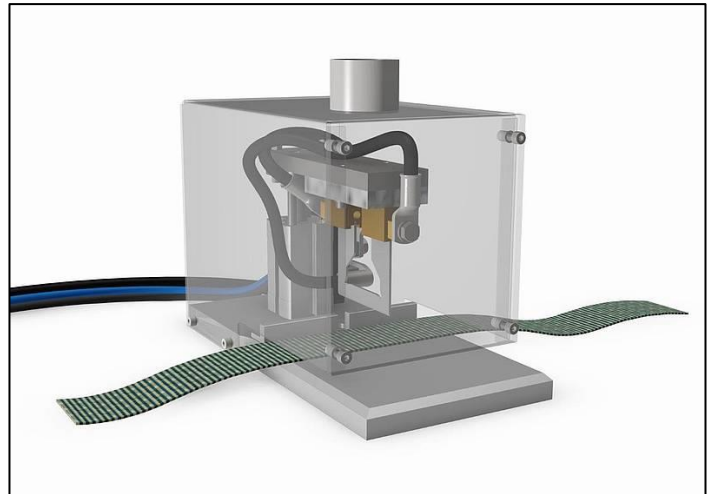


Blade stand GMN-V-E-K with exhaust hood  
*The illustration shows the blade stand without heating transformer and foot valve*

### Technical data:

Movement of the cutting blade(s):	Pneumatic
Belt width:	Max. 50 mm
Belt thickness:	Max. 4mm
Rope diameter:	Max. 12mm
Cutting element:	Electrically directly heated cutting blade, heats up to 600°C in approx. 1 minute
Temperature:	100 - 600°C, infinitely adjustable
Mains voltage:	230 Volt - 50/60Hz
Power consumption:	800 VA, depending on version
Compressed air:	6 bar
Dimensions:	approx. 120 x 300 x 240 mm (w x h x d)
Weight:	approx. 12 kg, with heating transformer

### Structure:

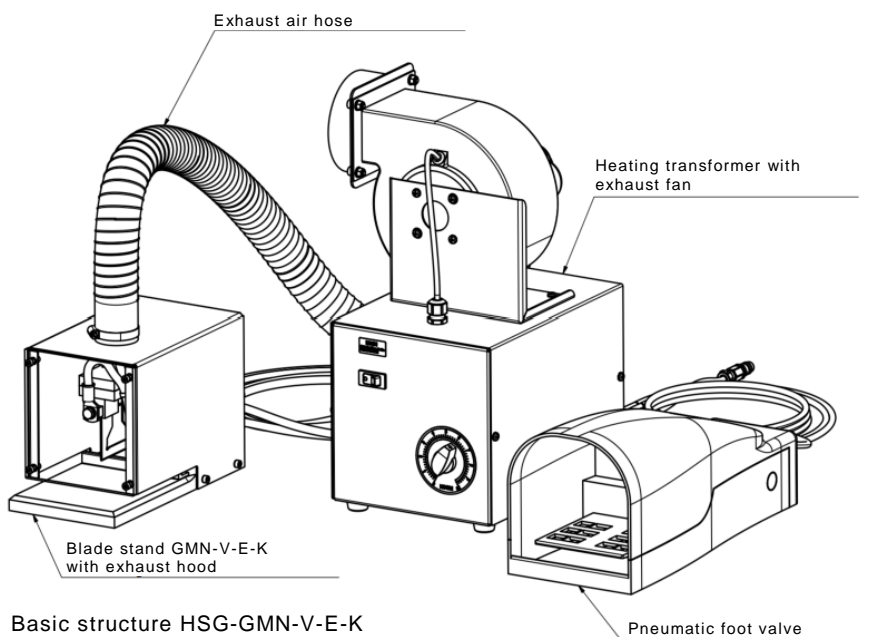

### Basic structure HSG-GMN-V-E-K

*Depending on the variant ordered, the delivered product may differ from the illustration*

### Scope of delivery:

- 1x HSG-GMN-V-E-K
- Incl. heating transformer and foot valve
- 1x Operating instructions with declaration of conformity