

CONTI® SYNCHROFLEX


Polyurethane timing belts for the lower and medium power range

Properties:

- Temperature range from -30 °C to +80 °C (please request technical advice for range under -10 °C and above +50 °C)
- Constant length
- Low-noise
- Wear-resistance
- High flexibility
- Resistant to oils, grease and fuel
- Conditionally resistant to acid and lye
- Raw materials and production are silicone free
- Suitable for tropical climates
- Aging-resistant
- Suitable for reverse flexing/reverse tensioning idlers
- Maintenance-free




Belt structure:

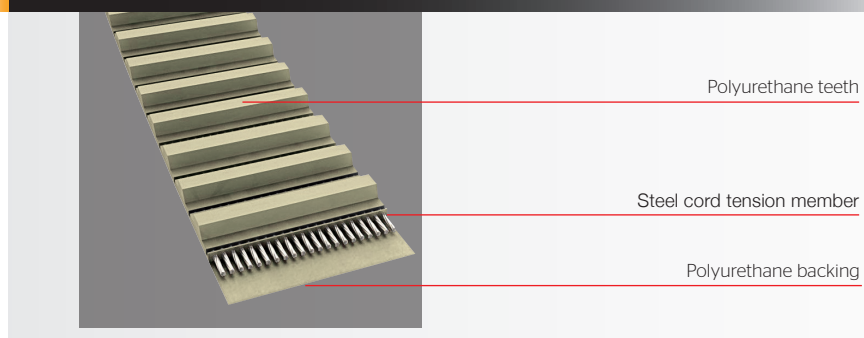

On request.

Comparison of products:

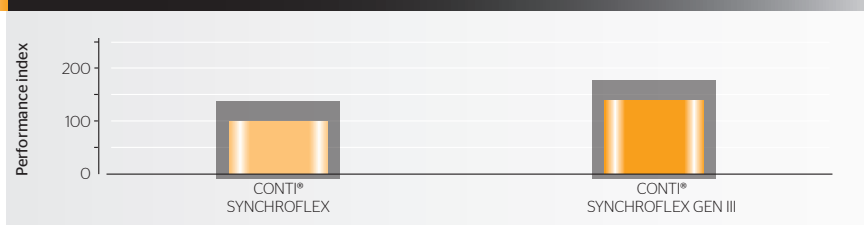

Profile	Length range L _p (mm)
AT 3	150 - 1011
AT 5	225 - 2000
AT 10	500 - 1940
AT 20	1000 - 1960
T 2	68 - 710
T 2,5	120 - 1300
T 2,5 - DL	317 - 457
T 5	100 - 1500
T 5 - DL	150 - 1325
T 10	260 - 4780
T 10 - DL	260 - 4780
T 20	1260 - 3620
M (MXL)	111 - 1178
K 1	279
K1,5	57 - 1242

For our **CONTI® SYNCHROFLEX Polyurethane timing belts** we take advantage of **Mulco group's** sales partners network and their competence in the development of customised drives for the fields of transport technology, linear drive applications and power transmission technology.

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2015 ContiTech AG. All rights reserved. For complete information go to: www.contitech.de/discl_en