


**DC / DC POWER SUPPLY for CompactPCI  
WITH GALVANIC INSULATION  
QUADRUPLE OUTPUT  
DG 4120, DG 4150, DG 4150R SERIES**



- 19" plug-in module
- Input: DG 4120: 8.5 - 36 VDC, DG 4150 and DG 4150R: 36 - 76 VDC
- DG 4150R: For redundancy operation, Hot-plug
- EMC Standards EN 50081-1 and EN 50082-2
- All outputs permanent short-circuit proof
- Output SELV according to EN 60950
- Primary/secondary overvoltage protection
- Overtemperature protection
- Control inputs: ENABLE, INHIBIT
- Signal outputs: DERATE
- Assembly kit for DIN-rail or wall mounting

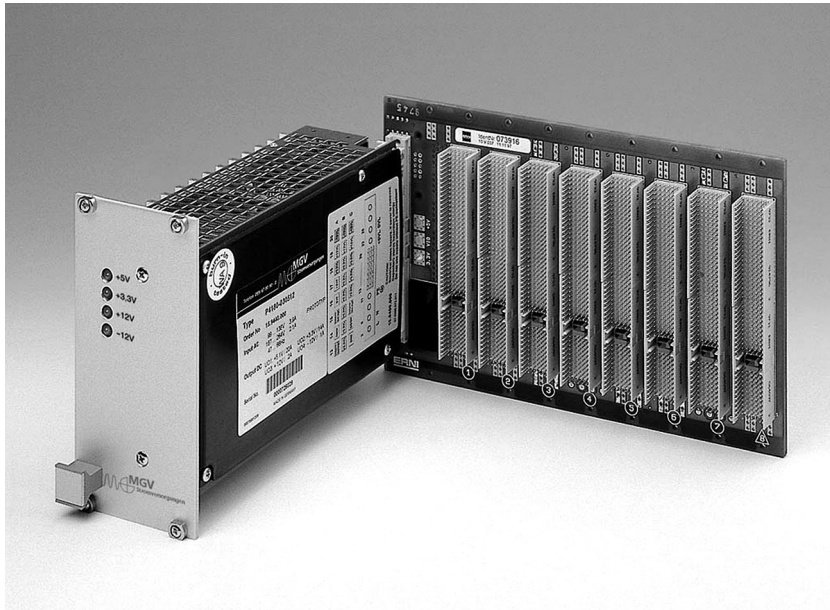

Front panel: 12TE - 60.6  
Handle width: 3TE

ORDER DATA										<i>Order numbers in italics</i>
Vo1 V	Io1 A	Vo2 V	Io2 A	Vo3 V	Io3 A	Vo4 V	Io4 A	Width TE	Height HE	Type No.
+5.1	0 - 14	+3.3	0 - 14	+12	0 - 2	-12	0 - 1	12	3	<b>DG4120-1/2G</b> <i>15.9440.200</i>
+5.1	0 - 14	+3.3	0 - 14	+12	0 - 2	-12	0 - 1	12	3	<b>DG4150-3G</b> <i>15.9440.300</i>
+5.1	0 - 14	+3.3	0 - 14	+12	0 - 2	-12	0 - 1	12	3	<b>DG4150R-3G</b> <i>15.9440.400</i>

Total output: You can take 120W max. from the device (at DG4150: 150W max. with forced ventilation)

Additionally:

Front panel (nature anodized)	33.1594.000.011
Assembly kit for DIN-rail	15.7140.000.190
Assembly kit for wall mounting	15.7140.000.290

