




SPC-10-10-F

Ruland SPC-10-10-F, 5/8" x 5/8" Rigid Coupling, Black Oxide Steel, Two-Piece Clamp Style With Keyway, 1 5/16" OD, 2" Length

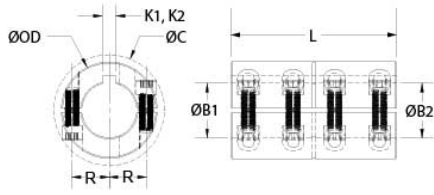

Description

Ruland SPC-10-10-F is a two-piece rigid coupling with 0.6250" x 0.6250" bores, 1 5/16" OD, 2" length, and 3/16" x 3/16" keyways. It has precision honed bores to ensure they are collinear and do not introduce misalignment or vibration into the system making it suitable for high precision servo applications as well as shaft to shaft connections. SPC-10-10-F has opposing hardware for a balanced design. Proprietary Nypatch® anti-vibration coating on hardware allows for even seating of the screw, repeated screw installations, prevents galling, and maintains high holding power. It eliminates the need to treat screws upon receipt greatly reducing installation time. Forged screws test beyond ANSI standards to ensure maximum holding power. Tightly controlled bore tolerance of +.002"/+.0005" is maintained. SPC-10-10-F is made from 1215 lead-free steel with a proprietary black oxide finish that produces a fine glossy finish while increasing holding power and resisting corrosion. It is machined from solid bar stock that is sourced exclusively from North American mills and is RoHS3 and REACH compliant. SPC-10-10-F is manufactured in our Marlborough, MA factory under strict controls using proprietary processes.

Product Specifications

Bore (B1)	0.6250 in	Small Bore (B2)	0.6250 in
Keyway (K1)	3/16 in	Keyway (K2)	3/16 in
B1 Max Shaft Penetration	1.000 in	B2 Max Shaft Penetration	1.000 in
Outer Diameter (OD)	1 5/16 in	Bore Tolerance	+0.0020 in / +0.0005 in
Length (L)	2 in	Clearance Diameter (C) MAX	1.514 in
Recommended Gap	0.063 in	Recommended Shaft Tolerance	+0.0000 in / -0.0005 in
Forged Clamp Screw	#10-32	Screw Material	Alloy Steel with Nypatch®
Hex Wrench Size	5/32 in	Screw Finish	Black Oxide
Seating Torque	76 lb-in	Screw Location (R)	0.484 in
Number of Screws	8 ea	Rated Torque	1,600 lb-in
Maximum Speed	4,000 RPM	Full Bearing Support Required?	No
Material Specification	1215 Carbon Steel Bar	Temperature	-40°F to 350°F (-40°C to 176°C)
Finish Specification	Hot Process Black Oxide, Impregnated with Naphthenic Oil, Centrifugally Dried	Manufacturer	Ruland Manufacturing
Country of Origin	USA	Weight (lbs)	0.517800
UPC	634529022146	Tariff Code	8483.60.8000
UNSPC	31163009		
Note 1	Performance ratings are for guidance only. The user must determine suitability for a particular application.		
Prop 65	⚠️ WARNING This product can expose you to the chemical Ethylene Thiourea, known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov .		

Installation Instructions

1. Align the SPC-10-10-F two-piece rigid coupling on the two shafts to be connected. There should be no misalignment.
2. Tighten the Nypatch® screws in two stages, starting with the inside screws. Using a #10-32 Nypatch® screws in two stages, starting with the inside. Using a 5/32 in torque wrench, tighten the inside screws to 38 lb-in which is half the recommended seating torque.
3. Repeat the process for the outside screws, tightening to half the recommended seating torque.
4. On two-piece couplings be sure to maintain the gap of 0.063 in between the two halves during installation.
5. Tighten the screws to the full recommended seating torque of 76 lb-in following the same pattern, starting with the inside screws first.
6. For optimum results do not exceed the shaft penetration length of 1.000 in.

