




INTERNALLY MOUNTED
PMI Series


TD SERIES TANK DIFFUSERS

Port Sizes: 3/8" Thru 6" NPT
Operating Temperature: Up to 250° F

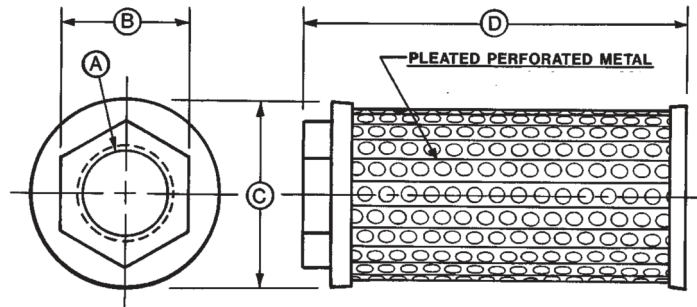

Model Number	A Inlet Port	B Wrench Flat	C Outside Dia.	D Overall Length	Rated Flow (At 15 Ft/Sec)	Ratio of Perf Mtl Open Area vs. Pipe Int Area
TD-03-PMI	3/8" NPTF	1.2"	1.3"	3.0"	9 GPM	25 : 1
TD-030-PMI	3/8" NPTF	1.13"	3.2"	2.2"	9 GPM	55 : 1
TD-05-PMI	1/2" NPTF	1.2"	1.3"	3.0"	14 GPM	16 : 1
TD-050-PMI	1/2" NPTF	1.13"	3.2"	2.2"	14 GPM	35 : 1
TD-07-PMI	3/4" NPTF	1.5"	1.7"	3.9"	25 GPM	18 : 1
TD-075-PMI	3/4" NPTF	1.75"	3.2"	2.2"	25 GPM	20 : 1
TD-10-PMI	1" NPTF	1.75"	1.9"	4.9"	40 GPM	19 : 1
TD-100-PMI	1" NPTF	1.75"	3.2"	3.6"	40 GPM	27 : 1
TD-125-PMI	1 1/4" NPTF	2.25"	3.2"	4.6"	70 GPM	22 : 1
TD-150-PMI	1 1/2" NPTF	2.25"	3.2"	5.6"	95 GPM	21 : 1
TD-200-PMI	2" NPTF	3.0"	4.2"	6.2"	157 GPM	17 : 1
TD-250-PMI	2 1/2" NPTF	3.5"	4.2"	10.3"	224 GPM	22 : 1
TD-300-PMI	3" NPTF	4.0"	4.2"	10.4"	346 GPM	15 : 1
TD-400-PMI	4" NPT	N/A	9.0"	13.4"	595 GPM	21 : 1
TD-600-PMI	6" NPT	N/A	9.0"	19.9"	1351 GPM	15 : 1

EXTERNALLY MOUNTED
PME Series

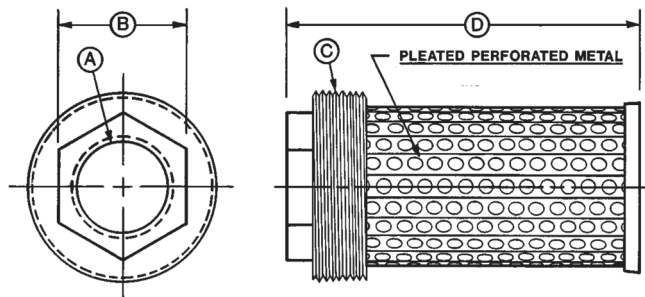

Model Number	A Inlet Port	B Wrench Flat	C Male Thread	D Overall Length	Rated Flow (At 15 Ft/Sec)	Ratio of Perf Mtl Open Area vs. Pipe Int Area
TD-0310-PME	3/8" NPTF	1.2"	1" NPTF	3.0"	9 GPM	25 : 1
TD-0510-PME	1/2" NPTF	1.12"	1" NPTF	4.0"	9 GPM	25 : 1
TD-0712-PME	3/4" NPTF	1.5"	1 1/4" NPTF	3.9"	25 GPM	18 : 1
TD-1015-PME	1" NPTF	1.75"	1 1/2" NPTF	4.9"	40 GPM	19 : 1
TD-1030-PME	1" NPTF	2.5"	3" NPTF	4.7"	40 GPM	31 : 1
TD-1220-PME	1 1/4" NPTF	2.1"	2" NPTF	5.1"	70 GPM	14 : 1
TD-1230-PME	1 1/4" NPTF	2.5"	3" NPTF	4.7"	70 GPM	18 : 1
TD-1530-PME	1 1/2" NPTF	2.5"	3" NPTF	5.7"	95 GPM	18 : 1
TD-2040-PME	2" NPTF	4.1"	4" NPT	6.8"	157 GPM	17 : 1
TD-2540-PME	2 1/2" NPTF	4.1"	4" NPT	10.8"	224 GPM	22 : 1
TD-3040-PME	3" NPTF	4.1"	4" NPT	10.8"	346 GPM	15 : 1
TD-4060-PME	4" NPT	5.8"	6" NPT	17.5"	595 GPM	21 : 1